

Notes :

1 Material :  
 BASE: PBT+30%GF,UL94V-0  
 Cover:PBT+30%GF,UL94V-0  
 Contact : Phosphor Bronze (C5191R-H)  
 Switch:Phosphor Bronze (C5191R-H)


2 Design features :  
 2.1 Accepts ISO 7816-2  
 2.2 EMV '2000

**RoHS Compliant** **HSM 玄茂科技股份有限公司**  
**HSUAN MAO TECHNOLOGY CO., LTD.**

APPD. 核准	 SCALE 比例 参考	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖		0 ± 0.2 00 ± 0.15 ANG. ± 5°	
DATE 制表日	UNIT 單位	SIZE 紙張尺寸	PART NO.
2016/1/13	M M	A 4	
	PAGE 張數	REV. 版本	
	2 OF 1	A	

*Helen*

Contact resistance	IEC512-2-2a	50 mΩ typical, 100 mΩ max.
Insulation resistance Pin to pin	IEC512-2-3a	> 1000 MΩ / 500 V DC
Rated voltage		30 V max.
Rated current		1 A max.
Dielectric withstanding voltage	IEC512-2-4a	500 V AC rms 1 min. (sea level)
Items	Standard	Description
Operating temperature		- 40°C ~ + 85°C

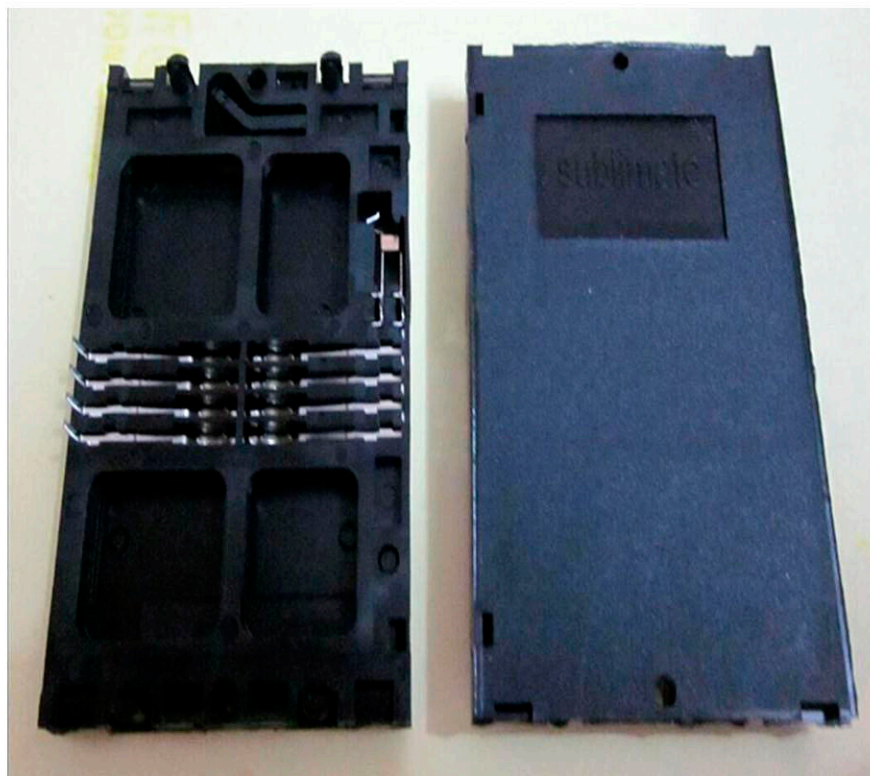

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖		SCALE 比例	
DATE 制表日	Helen	UNIT 單位	REV. 版本
2016/1/13		M M	A
		PAGE 張數	2 OF 2
			PART NO. 料號
			C0118-08ACYSB0R