


Specifications:

- Material: Polyester, UL 94V-2
- Voltage Rating: 250V
- Current Rating: 6A
- Withstand Voltage: 1500V AC/Minute
- Insulation Resistance: 1000MΩ min.
- Temperature Range: -25°C~+85°C
- Contact Resistance: Initial value/10m max.
- After environmental testing/20mΩ max.
- Applicable Wire:AWG#18 TO #24

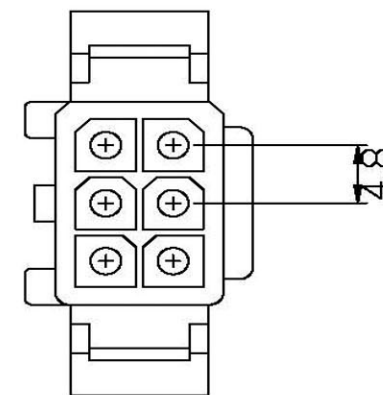

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差 0 ± .00 ± ANG ±	PART NAME 品名 4.8mm HOUSING 2X3P FEMALE WITH EAR WHITE COLOR UL94-V2 ROHS LOW-LEAD
DWG. 製圖 HELEN	SCALE 比例 參考	UNIT 單位 MM	SIZE. 紙張尺寸 A4
DATE 制表日 2009/6/10	PAGE 張數 1 OF 1	REV. 版本 A	PART NO. 料號 H4800-06FDYW00R