


**Features:**

- 600V volts rating ( R.M.S. )
- Thickness: 0.2mm

**Specifications:**

- Voltage rating: 600V AC, DC
- Current rating up to 9A(with #18 AWG)
- Dielectric withstanding Voltage: 1500V AC/minute
- Contact resistance: Initial value/10mΩ max.  
After environmental testing/20mΩ max.
- Crimp resistance: 5mΩ max,
- Terminal retention force: 3.0Kg min.
- Ambient temperature range: -40°C ~ 105°C  
(including temperature rise)

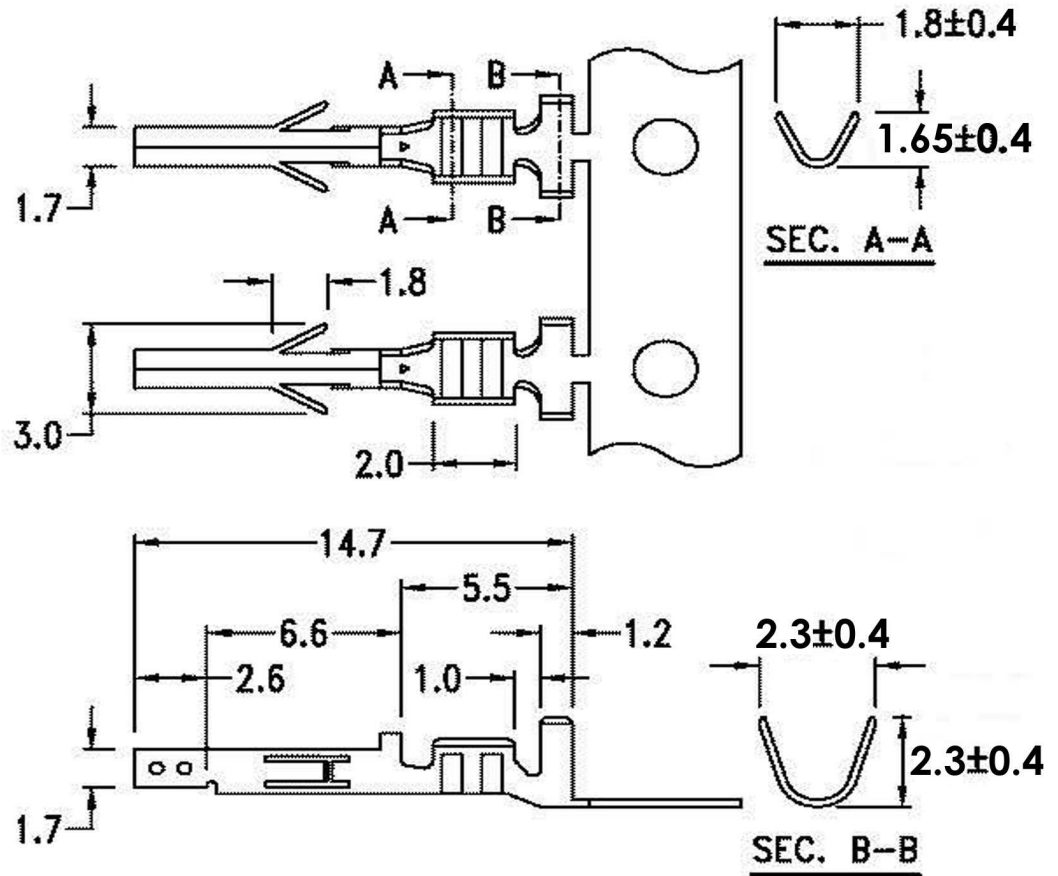

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	BETTY	 SCALE 比例 參考	TOLERANCE 容許公差 .0 ±0.4 .00 ±0.25 ANG. ±
DWG. 製圖	BETTY		UNIT 單位 M M
DATE 制表日	2009/06/29	PAGE 張數 1 OF 1	REV. 版次 A
		PART NO. T5150-TBJ00000R 料號	