

SPECIFICATIONS

Current rating : 2A AC,DC

Voltage rating : 250V AC,DC


Temperature range : -25°C to +85 °C

Contact resistance : 20mΩ Max.

Insulation resistance : 1000MΩ Min.

Withstanding voltage : 800V AC/minute

Material : Nylon 66, UL94V-2

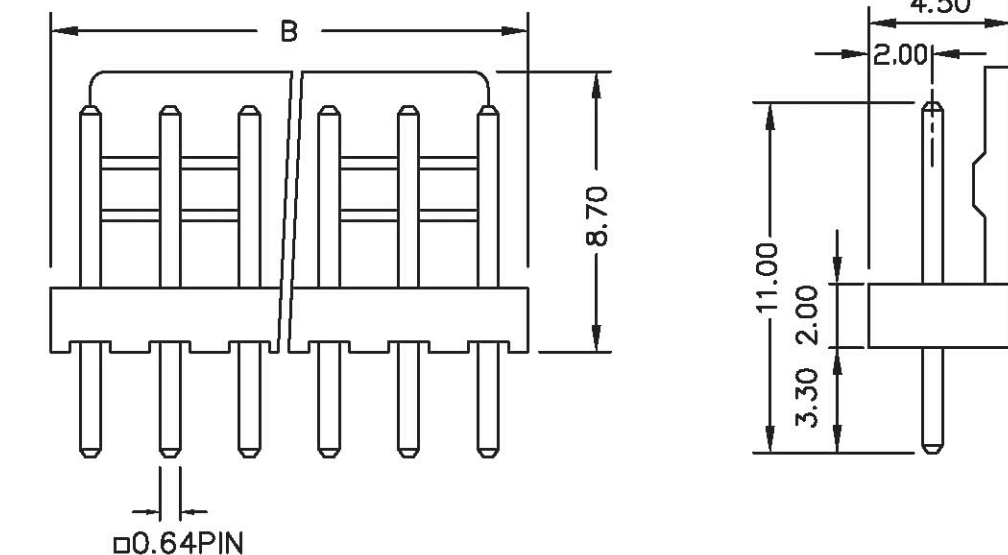

Ordering Information & Dimensions

Poles	Dimension (mm)	
	A	B
02	2.50	5.10
03	5.00	7.60
04	7.50	10.10
05	10.00	12.60
06	12.50	15.10
07	15.00	17.60
08	17.50	20.10
09	20.00	22.60
10	22.50	25.10
11	25.00	27.60
12	27.50	30.10

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差 0 ± 0.3 .00 ± 0.2 ANG. ±	PART NAME 品名 DUPOND2.5mm WAFER ??P STRAIGHT TYPE WITH LOCKING IVORY INSULATOR ROHS LOW-LEAD
DWG. 製圖 HELEN	SCALE 比例 參考	UNIT 單位 MM	PART NO. 料號 W2660-XXPSX100R
DATE 制表日 2009/6/26	PAGE 張數 1 OF 1	REV. 版本 A	