
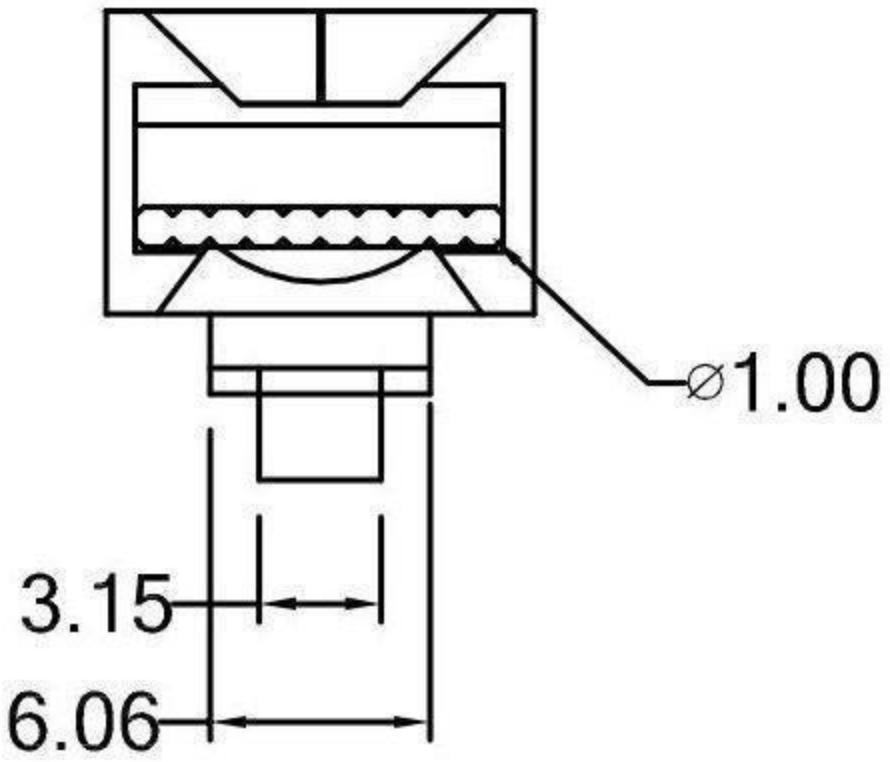
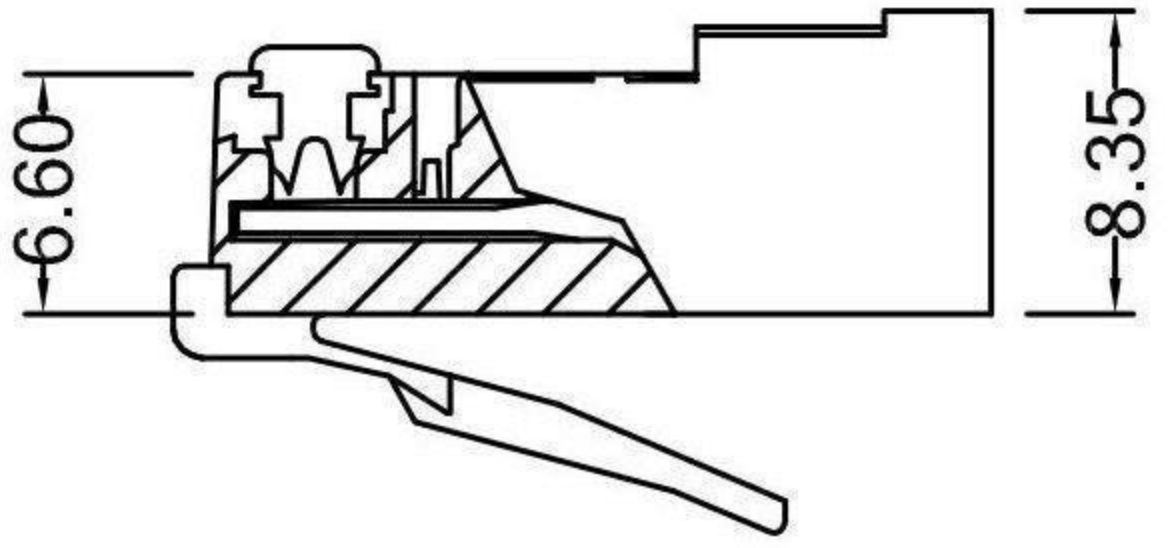
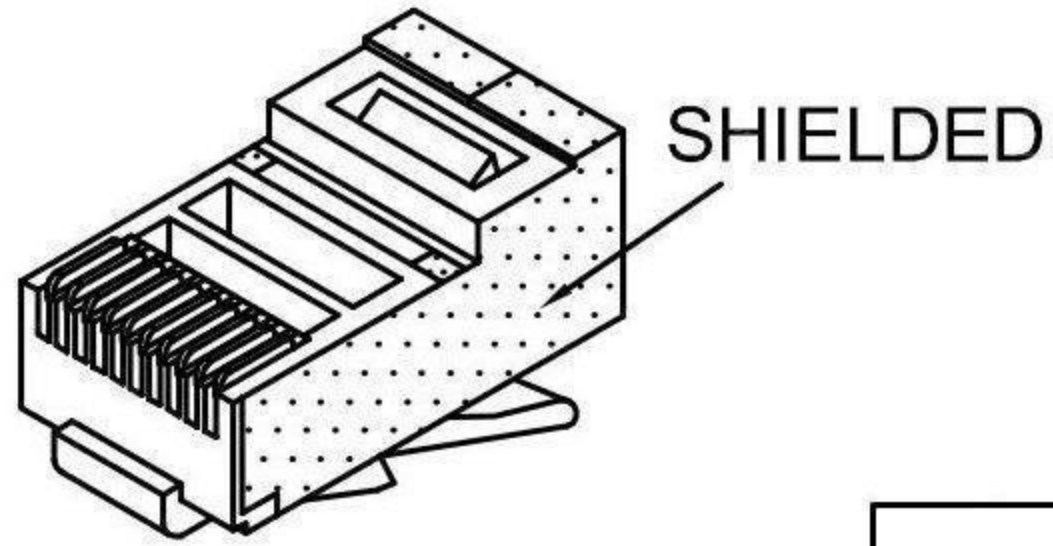


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

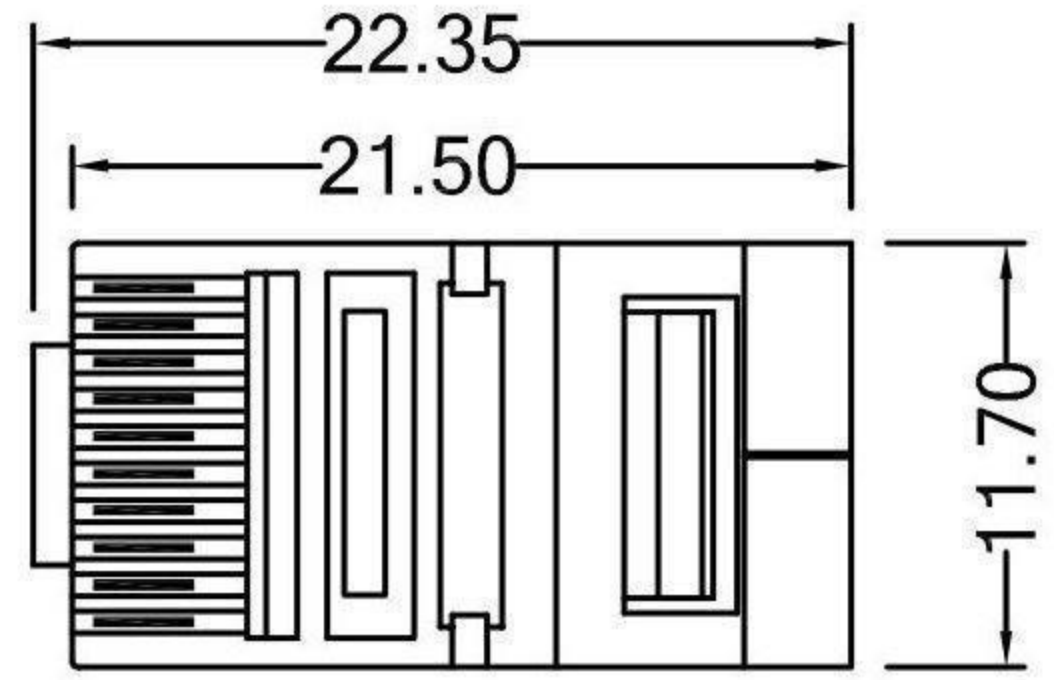

F: flat oval cable

R: round cable

1 : 2 prong for stranded wire
 2 : 2 prong for stranded or solid wire
 0 : 3 prong for stranded or solid wire

MATERIAL & FINISH

Housing: PC. UL94V-2, clean
 Contact: copper alloy, selective gold plating
 Shield: bronze plated nickel

UNIT: m / m
 TOL.: +/- 0.10

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	 TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名
DWG. 製圖 ABBY		MODULAR PLUG 10P10C W/SIELDING V2 ROHS
DATE 制表日 2011/11/07	UNIT 單位 M M	PART NO. 料號 C0050-00XAYXX0R
	PAGE 張數 1 OF 1	REV. 版本 B

1 2 3 4 5 6 7 8