
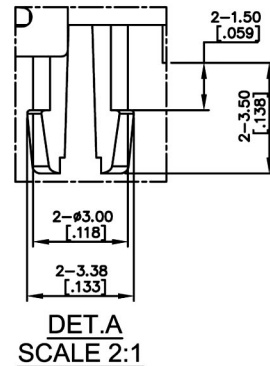
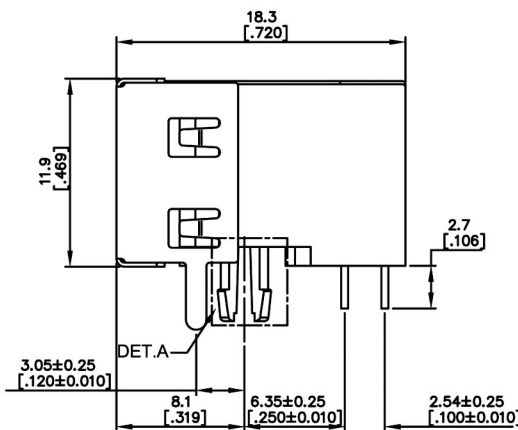


1 2 3 4 5 6 7 8

A

A

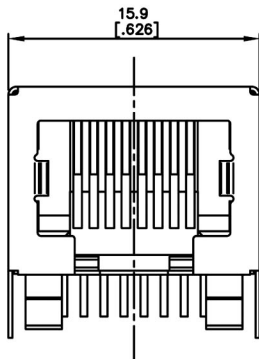

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Copper Alloy
 Optional Gold Plating Over Nickel
 Shell: Copper Alloy, Nickel Plating.

B




B

C

C

D

D

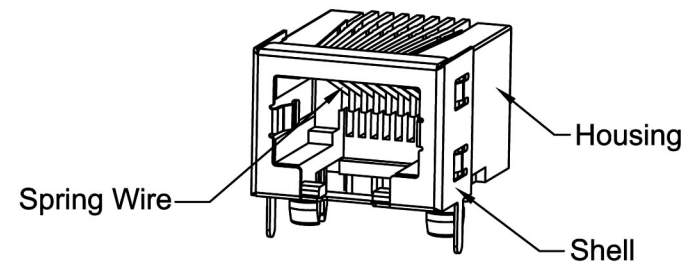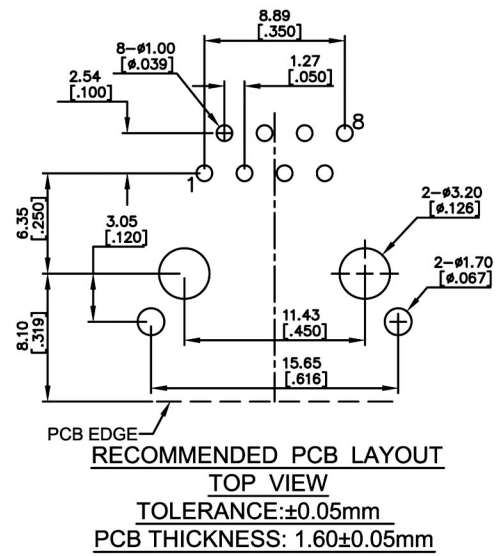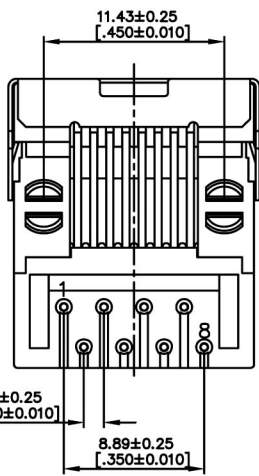

E

E

F

F

G

G

H

H

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 DWG. 製圖 DATE 制表日 2014/02/18	Hedy 1 / 1	TOLERANCE 容許公差 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 / 1 REV. 版次 A	PART NAME 品名 SIDE ENTRY L/P PCB JACK 8P8C W/Front SHIELDED ONLY GOLD 3U" PLATING BLACK COLOR ROHS PART NO. 料號 C0057-88FGB000R

1 2 3 4 5 6 7 8