


NOTE:

CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:
  - 1.1 HOUSING: PBT, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
  - 1.2 CONTACTS: PHOSPHOR BRONZE.
  - 1.3 SHELL: BRASS.
2. FINISH:
  - 2.1 CONTACTS: 1.27 $\mu$ m [50 $\mu$ '] GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, 1.27 $\mu$ m [50 $\mu$ '] MIN. NICKEL UNDERPLATED OVERALL.
  - 2.2 SHELL: 0.508 $\mu$ m [20 $\mu$ '] MIN. NICKEL PLATED.
3. "▽" SHOWS QIP INSPECTION POINT.
4. OPERATING TEMPERATURE: -40°C to 85°C

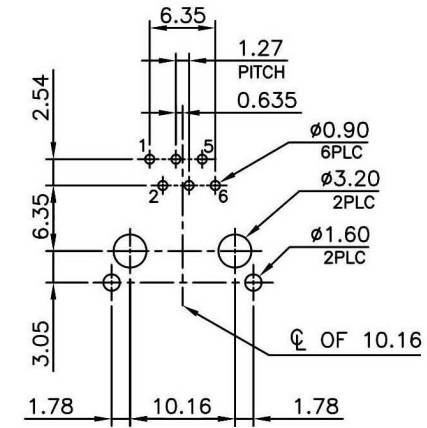

RECOMMENDED PCB LAYOUT  
PCB THICKNESS: 1.6mm  
TOLERANCE: ±0.05mm (TOP VIEW)

RoHS Compliant		玄茂科技股份有限公司 <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 Betty	SCALE 比例 参考 UNIT 單位 M M PAGE 張數 1 OF 1	TOLERANCES UNLESS OTHERWISE SPECIFIED: X ± - X.X ± 0.25 X.XX ± 0.13 X.XXX ± 0.05 ANGLES ± -	PART NAME 品名 SIDE ENTRY P.C.B. JACK 6P6C DIP TYPE WITH PANEL STOP (SHIELDED) CONTACT AREA: GOLD 50U" PLATING, OTHER AREA: GOLD FLASH PLATING BLACK INSULATOR ROHS PART NO. 料號 C0065-66PCM1B00R
DATE 制表日 2022/09/05		SIZE 紙張尺寸 A 4 REV. 版次 A	