


ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

Insertion Loss:	1-100MHZ	-1.0dB MAX
Return Loss:	1-40MHZ	-18.0dB MIN
	60MHZ	-16.0dB MIN
	80MHZ	-12.0dB MIN
	100MHZ	-10.0dB MIN
Crosstalk:	1-30MHZ	-40.0dB MIN
	30-60MHZ	-35.0dB MIN
	60-100MHZ	-30.0dB MIN
CMR:	1-100MHZ	-35.0dB MIN

Hipot:1500V AC 6S 1mA
 OCL:350uH MIN @ 100KHZ 100mV 8mA DC

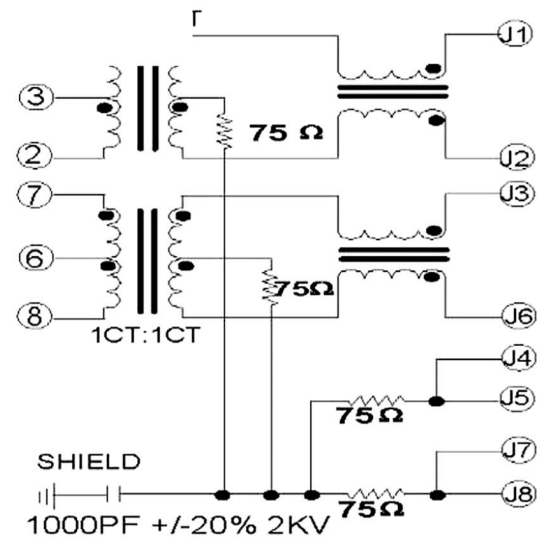

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差 .X: +/-0.25 .XX: +/-0.13	PART NAME 品名 RJ45 TRANSFORMER PCB JACK WITH FULLY SHIELDED WITH TABS BLACK COLOR ROHS
DWG. 製圖 Betty	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 C0072-88AYXB00R
DATE 制表日 2011/10/03	PAGE 張數 1 OF 1	REV. 版次 A	