

MATERIAL & FINISH

Housing & Insert: PBT. UL94V-0, white

Conductor: 0.35 x 0.42 mm phosphor bronze,

Gold plated over nickel on contact area,

Tin plated over nickel on solder area.


Voltage : 125 VAC

Current : 1.5 A

Contact Resistance : 30 milliohms max.

Insulation Resistance : 500 megaohms min.

Dielectric Withstanding Voltage : 1000 VAC

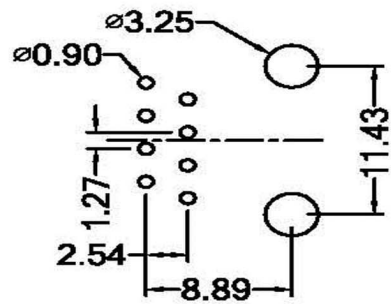

PCB LAYOUT / TOP VIEW

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	BETTY	 SCALE 比例 参考 UNIT 單位 M M PAGE 張數 1 OF 1	TOLERANCE 容許公差 .0 ± 0.15 .00 ± ANG. ±
DWG. 製圖	BETTY		SIZE. 紙張尺寸 A 4
DATE 制表日	2009/07/07	REV. 版次 A	PART NAME 品名 45 DEGREES ENTRY PCB JACK 8P8C W/O SHIELDED WHITE INSULATOR
			PART NO. 料號 C0088-88NXW000R