


Technical Data

Material:
 Pin(outer sleeve): Brass,machined CuZn38Pb2
 Plating(outer sleeve):
 Tin plated:2um/80u" Ni, 5um/200u" Sn
 Gold Plated:2um/80u" Ni,Full gold
 Insulator(black): PPS UL94V-0 Glass filled

Electrical:
 Current rating: 3Amps/contact max.
 Contact resistance: $\leq 4m\Omega$ /contact
 Insulation resistance: $\geq 1000M\Omega$ at V=100V
 Operating voltage: 60VAC/DC

Mechanical:
 Operating temperatures: Gold Plsted:-55°C to+125°C
 Tin plated:-40°C to+105°C
 Soldering temperature: +260°C,10s max.

P.C.B. Layout

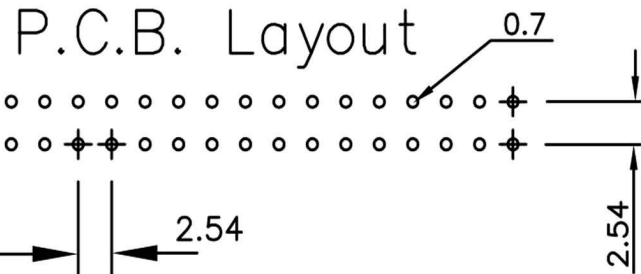

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCES ARE X. ±0.25 X.X ±0.1 X.XX ±0.01 X.XXX ±0.005 X.XXXX ±0.002	PART NAME 品名 2.54mm SIP SOCKET MACHINED PIN 4 FINGERED CLIP 2XXXP DIP LENGTH 7.4mm ROHS
DWG. 製圖 Betty	UNIT 單位 M M	SIZE 紙張尺寸 A 4	PART NO. 料號 C0112-XXDA(A,B)00R
DATE 制表日 2014/09/04	PAGE 張數 1 OF 1	REV. 版次 C	