



1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H





• MATERIALS: (RoHS Compliant)





Housing And Cover : Plastic Thermoplastic
P.B.T UL94V-0 Black
Contacts : Phosphor Bronze Gold
Selective Plated
Front Shell : Steel Nickel Plated
Over Copper

• ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 0.5 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: >500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +85°C

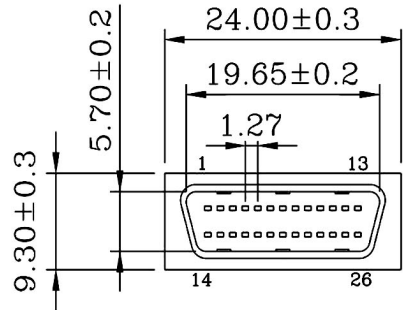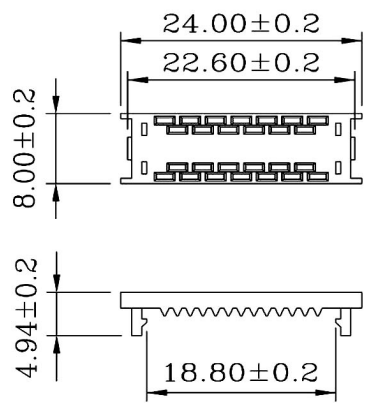


Termination Cover
(1 Places)

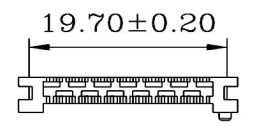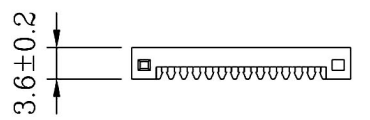

Wire Holder=0.62mm
(2 Places) *WIRE HOLDER:28Awg

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 1.27mm SCSI II D-SUB IDC TYPE CONNECTOR 26P MALE FLAG HOOK SPRING LATCH ENTRY HOLE SIZE:φ7.0mm WIRE HOLDER:0.62mm(FOR 28AWG) SELECTIVE GOLD 5U" PLATING HP D-SUB 26P MALE ROHS
DWG. 製圖	UNIT 單位	SIZE. 紙張尺寸	PART NO.
DATE 制表日 2016/10/04	Betty	MM	C0501-26MCSEX0R
	PAGE 張數	REV. 版次	料號
	1 OF 2	A	


1 2 3 4 5 6 7 8

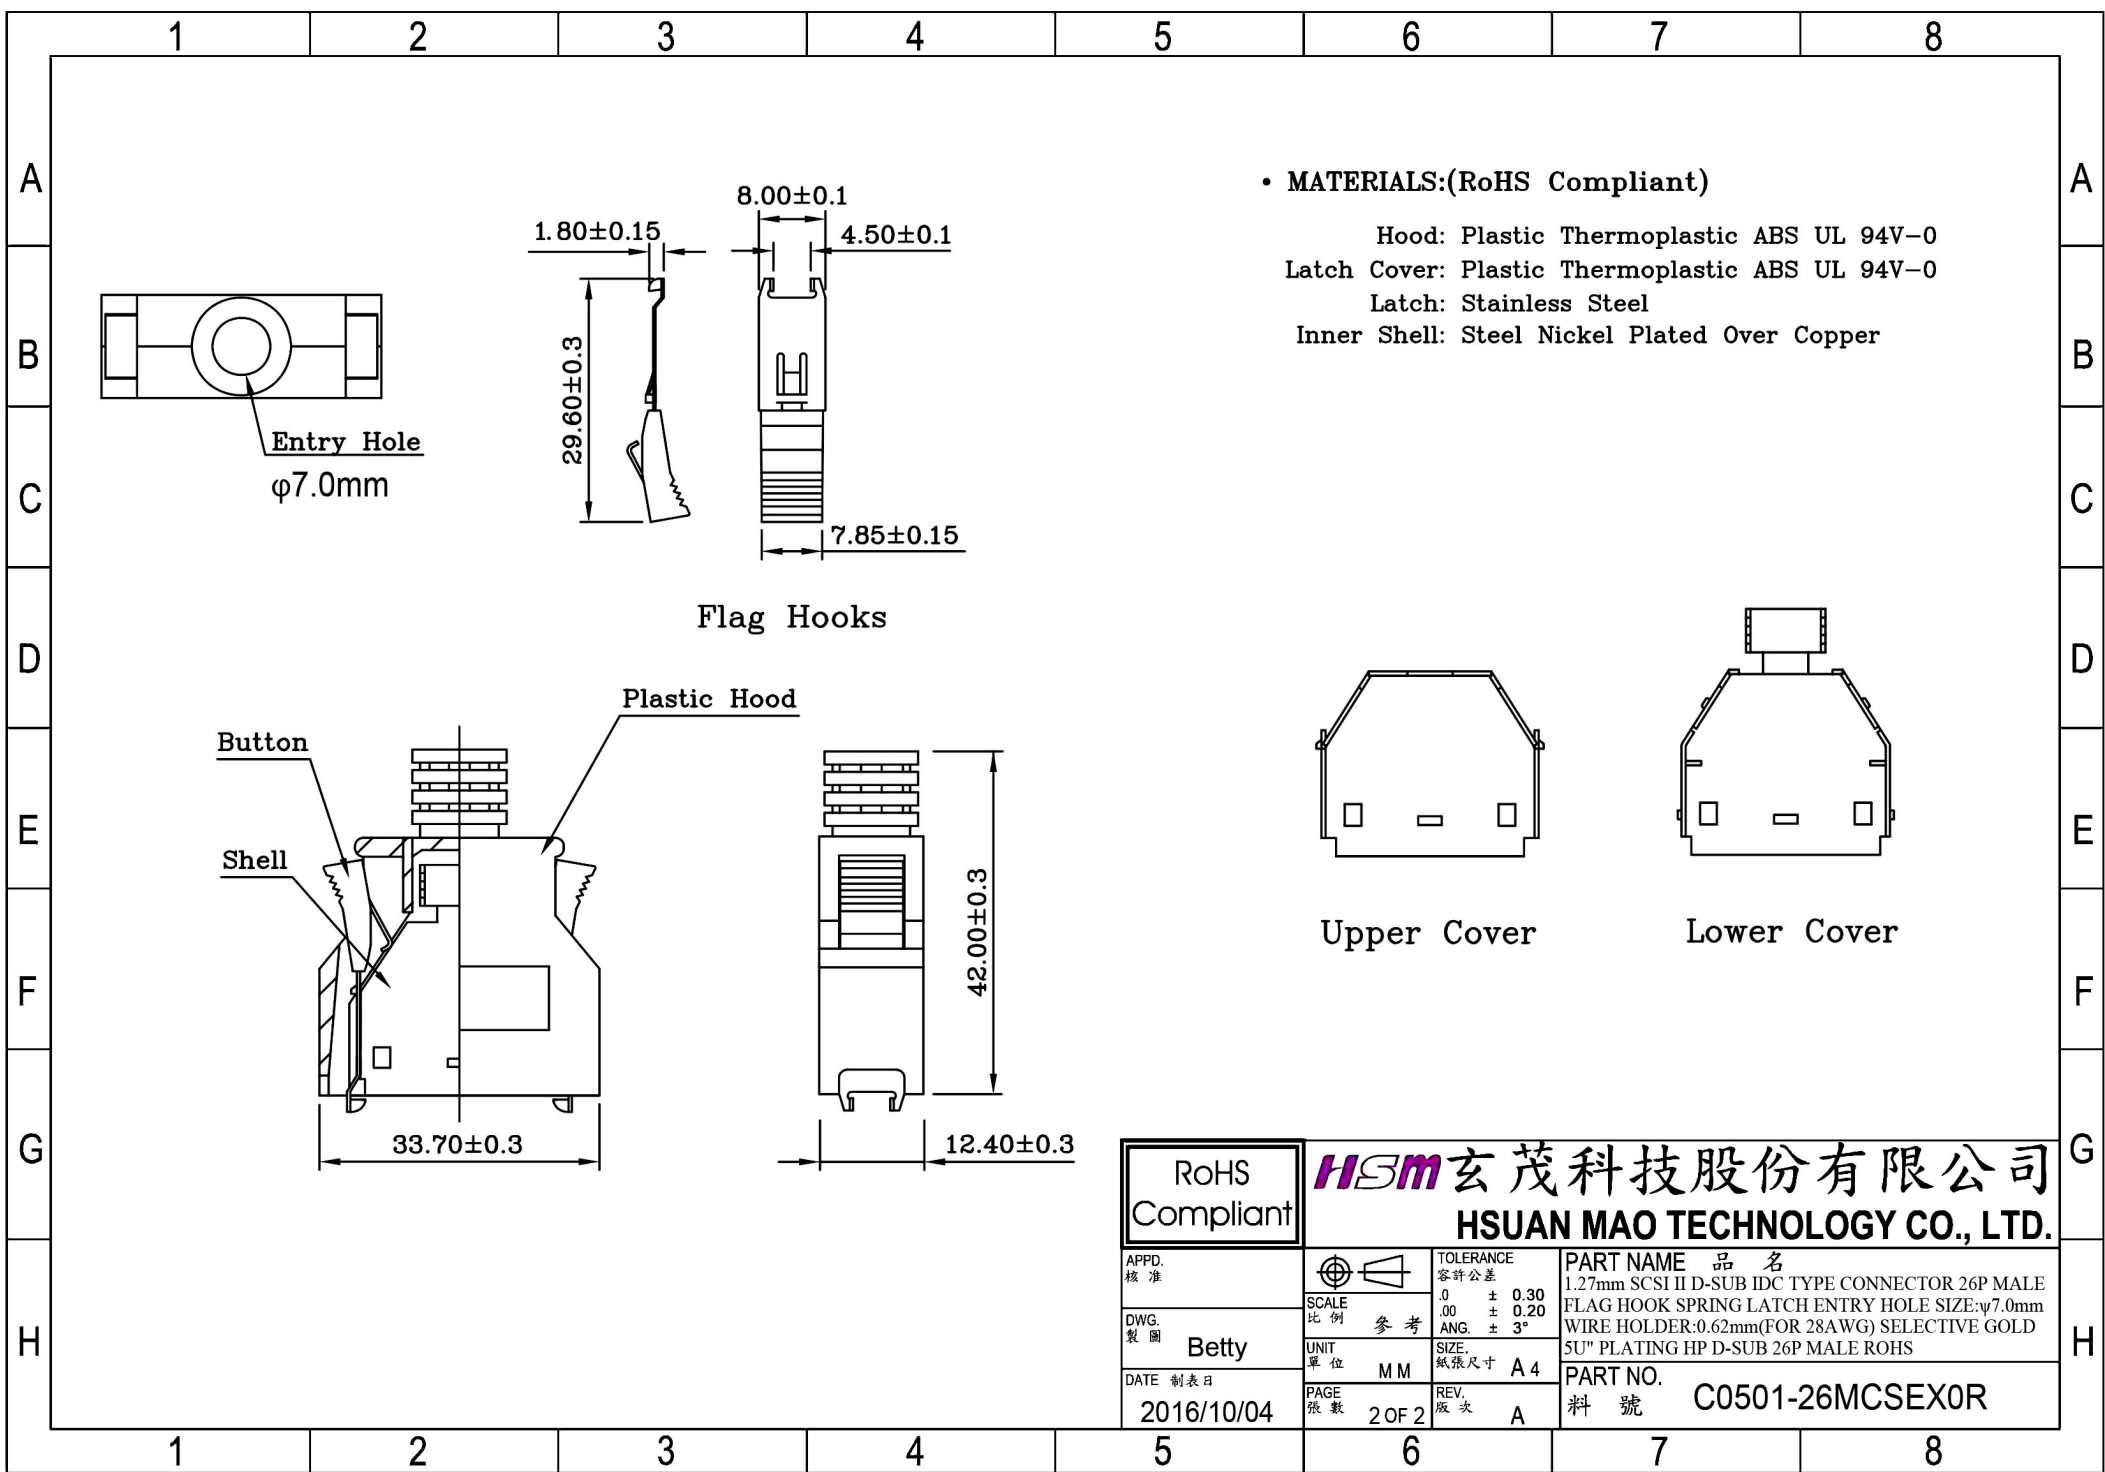

• MATERIALS:(RoHS Compliant)

- Hood: Plastic Thermoplastic ABS UL 94V-0
- Latch Cover: Plastic Thermoplastic ABS UL 94V-0
- Latch: Stainless Steel
- Inner Shell: Steel Nickel Plated Over Copper

Flag Hooks

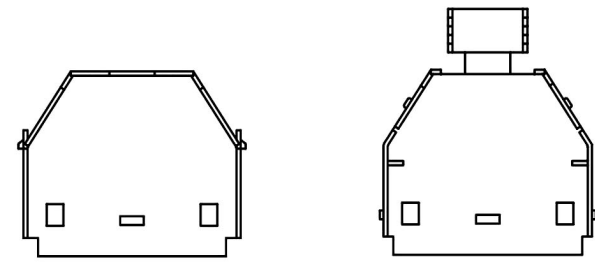

Upper Cover

Lower Cover

APPD. 核准			TOLERANCE 容許公差	PART NAME 品名 1.27mm SCSI II D-SUB IDC TYPE CONNECTOR 26P MALE FLAG HOOK SPRING LATCH ENTRY HOLE SIZE:φ7.0mm WIRE HOLDER:0.62mm(FOR 28AWG) SELECTIVE GOLD 5U" PLATING HP D-SUB 26P MALE ROHS
DWG. 製圖			SCALE 比例	
DATE 制表日		UNIT 單位	SIZE 紙張尺寸	PART NO. 料號 C0501-26MCSEX0R
2016/10/04		PAGE 張數	REV. 版次	
Betty		M M	A 4	

RoHS Compliant **HSM** 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.