

• MATERIALS:(RoHS Compliant)

Housing And Cover : Plastic Thermoplastic
P.B.T UL94V-0 Black

Contacts : Phosphor Bronze Gold
Selective Plated

Front Shell : Steel Nickel Plated
Over Copper

• ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 0.5 Amp

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: >500MΩ/Min


Contact Resistance: 35mΩ/Max

Operation Temperature: -55°C ~ + 85°C

**Termination Cover
(1 Places)**

**Wire Holder = 0.62mm
(2 Places)**

<p>RoHS Compliant</p>		<p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>	
<p>APPD. 核准</p>		<p>TOLERANCE 容許公差</p> <p>.0 ±</p> <p>.00 ±</p> <p>ANG. ±</p>	<p>PART NAME 品名</p> <p>1.27mm SCSI II D-SUB IDC TYPE CONNECTOR 68P MALE JACKSCREWS #2-56*2PCS METAL HOOD(ZINC PLATED NICKEL OVER COPPER) ENTRY HOLE SIZE:φ1.1mm SELECTIVE GOLD 5U" HP DB 68P MALE JACKSCREW ASSEMBLY ROHS</p>
<p>DWG. 製圖</p> <p>Betty</p>	<p>SCALE 比例</p> <p>參考</p>	<p>UNIT 單位</p> <p>MM</p>	<p>PART NO. 料號</p> <p>C0513-68MCAEZ0R</p>
<p>DATE 制表日</p> <p>2015/02/10</p>	<p>PAGE 張數</p> <p>1 OF 2</p>	<p>SIZE. 紙張尺寸</p> <p>A4</p>	<p>REV. 版次</p> <p>B</p>

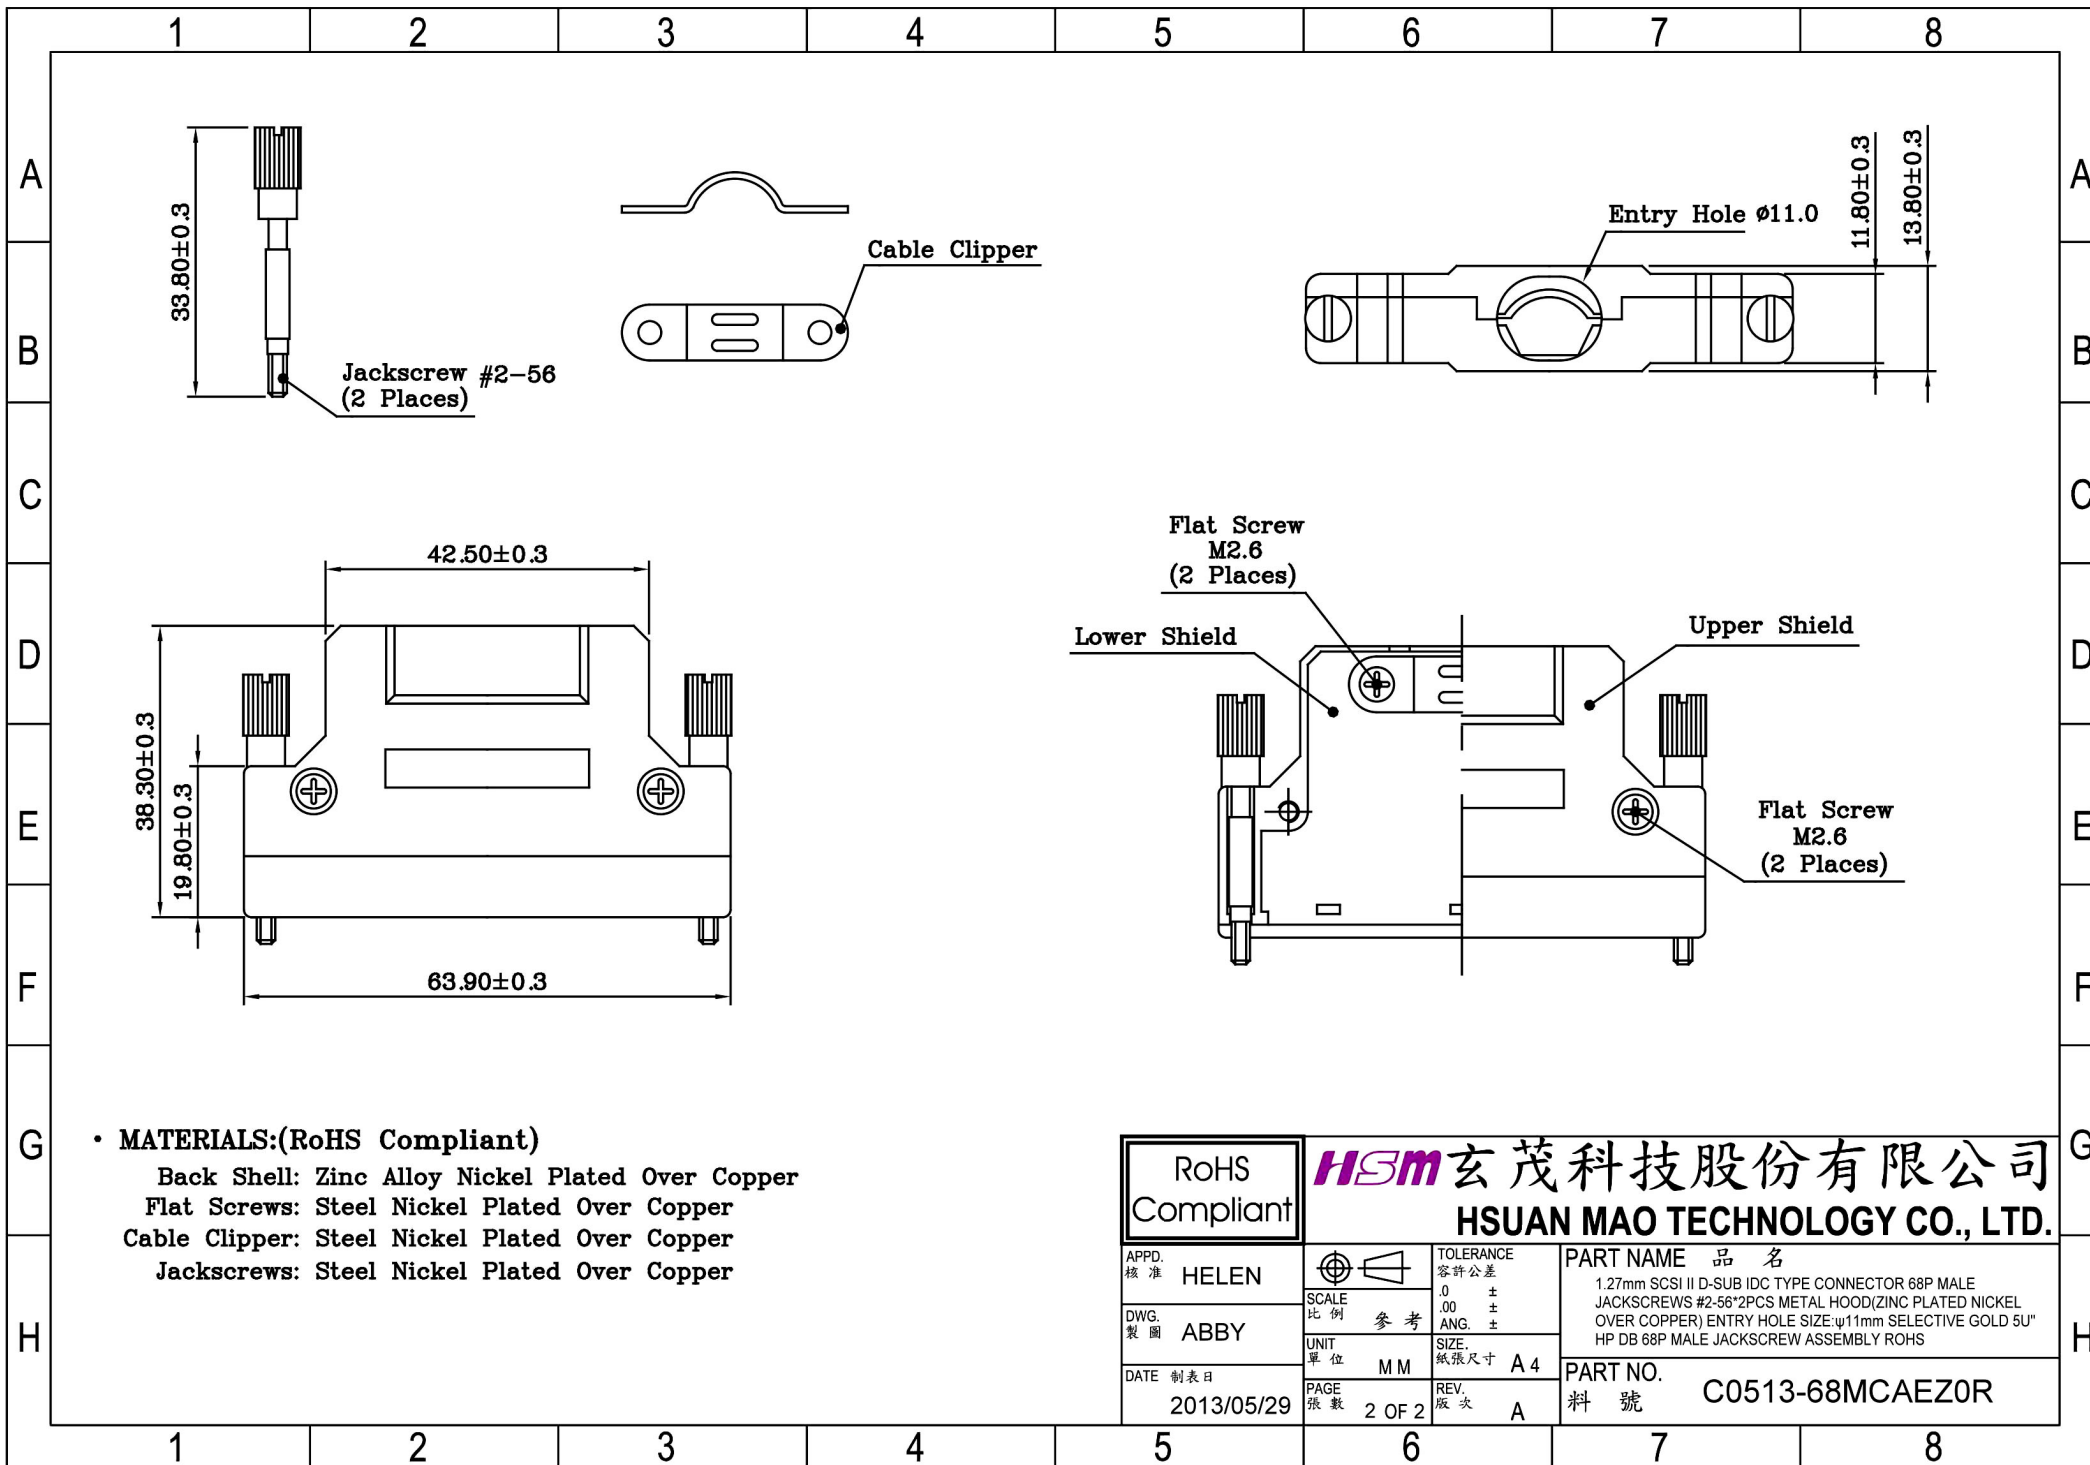

• MATERIALS:(RoHS Compliant)

- Back Shell: Zinc Alloy Nickel Plated Over Copper
- Flat Screws: Steel Nickel Plated Over Copper
- Cable Clipper: Steel Nickel Plated Over Copper
- Jackscrows: Steel Nickel Plated Over Copper

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 1.27mm SCSI II D-SUB IDC TYPE CONNECTOR 68P MALE JACKSCREWS #2-56*2PCS METAL HOOD(ZINC PLATED NICKEL OVER COPPER) ENTRY HOLE SIZE: $\phi 11\text{mm}$ SELECTIVE GOLD 5U" HP DB 68P MALE JACKSCREW ASSEMBLY ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 C0513-68MCAEZ0R
DATE 制表日 2013/05/29	PAGE 張數 2 OF 2	REV. 版次 A	