


● **MATERIALS: (RoHS Compliant)**

Housing: Plastic Thermoplastic
 P.B.T UL94V-0 Black
 Contacts: Phosphor Bronze Gold
 Selective Plated
 Bracket: Zinc Alloy Nickel Plated
 Over Copper

● **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 0.5 Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: >500MΩ/Min
 Contact Resistance: 35mΩ/Max
 Operation Temperature: -55°C ~ +85°C

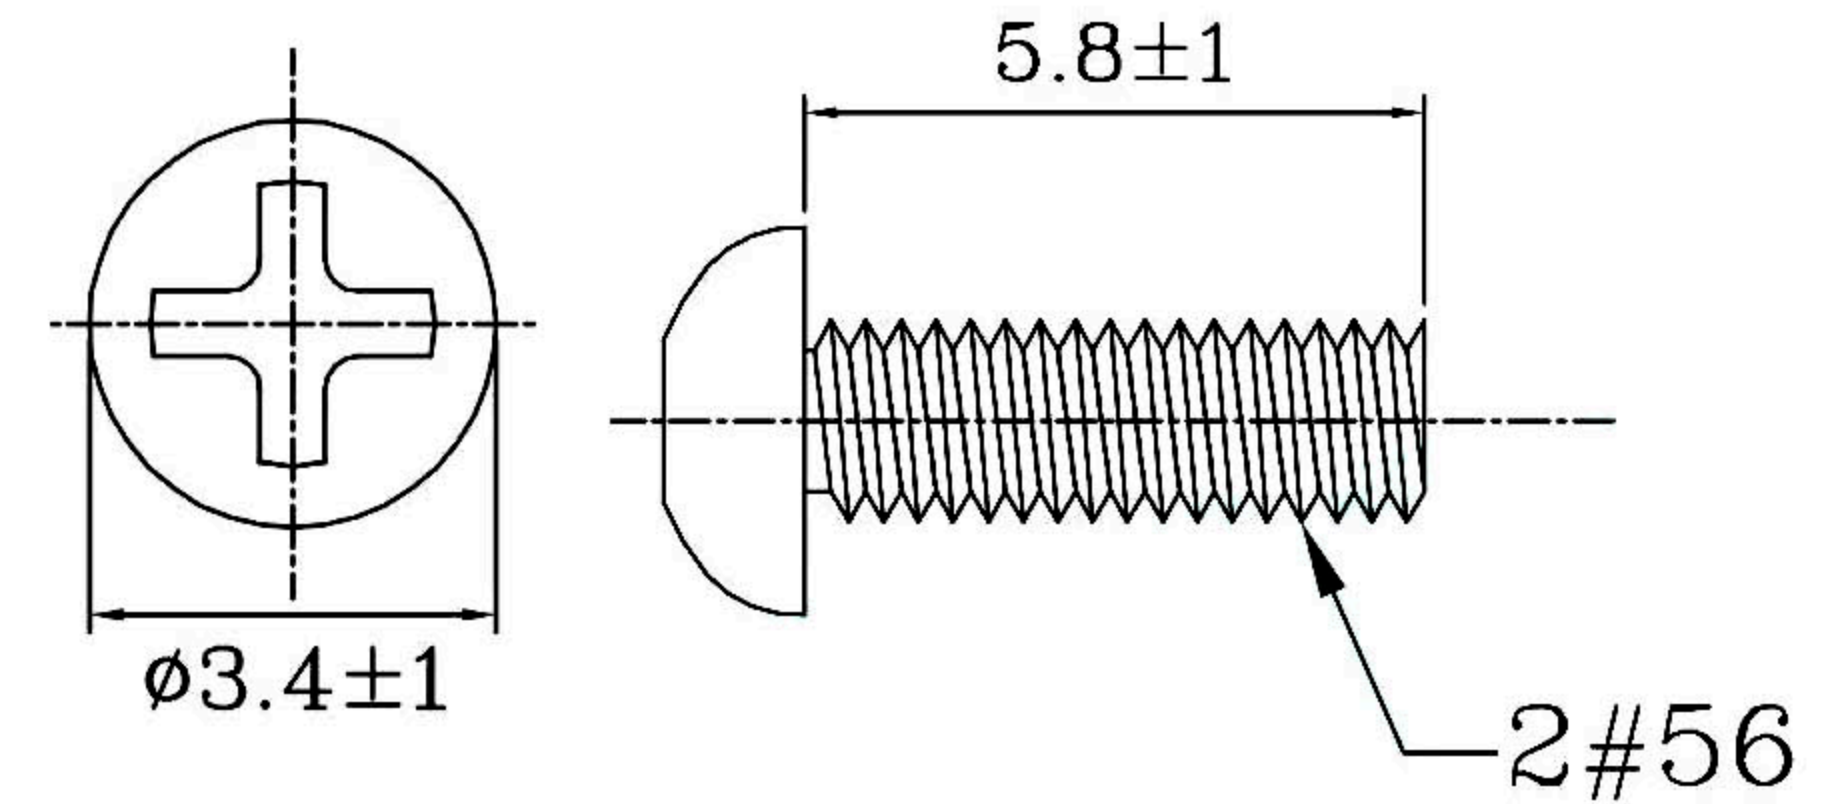

RoHS Compliant		HSM 玄茂科技股份有限公司	
		HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	SCALE 比例 參考	TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 SCSI-II D-SUB PCB 180° 1.27mm 50P FEMALE THREAD INSERT 2-56UNC W/Front LATCH METAL SHELL STANDARD TYPE BLACK INSULATOR ROHS
DWG. 製圖 Lena	UNIT 單位 MM	SIZE. 紙張尺寸 A4	PART NO. 料號 C0518-50FAAXB1R
DATE 制表日 2023/6/26	PAGE 張數 1 / 1	REV. 版次 D	