
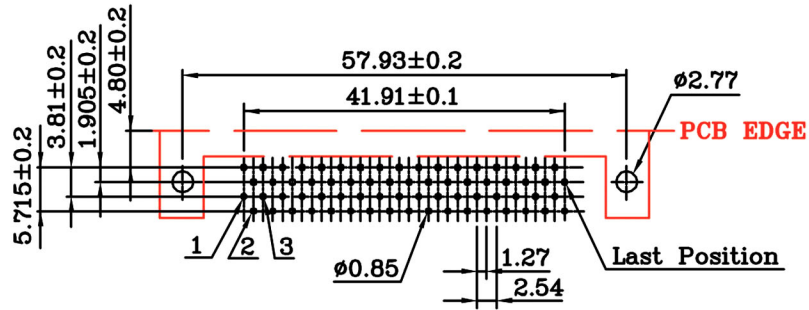

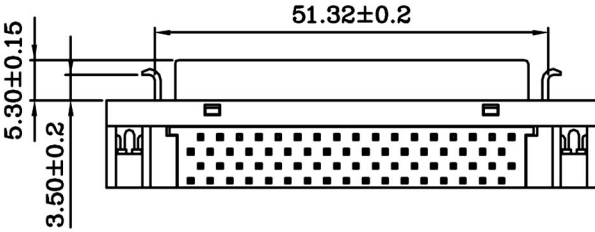


● **MATERIALS: (RoHS Compliant)**

- Housing And Cover: Plastic Thermoplastic P.B.T UL94V-0 Black
- Contacts: Phosphor Bronze Gold Selective Plated
- Front Shell: Steel Nickel Plated Over Copper
- Bracket: Steel Nickel Plated Over Copper
- Boardlock: Brass Tin Plated Over Copper

● **ELECTRICAL CHARACTERISTICS:**

- Contact Current Rating: 0.5 Amp
- Dielectric Withstanding Voltage: 500V AC
- Insulation Resistance: >500MΩ/Min
- Contact Resistance: 35mΩ/Max
- Operation Temperature: -55°C ~ +85°C

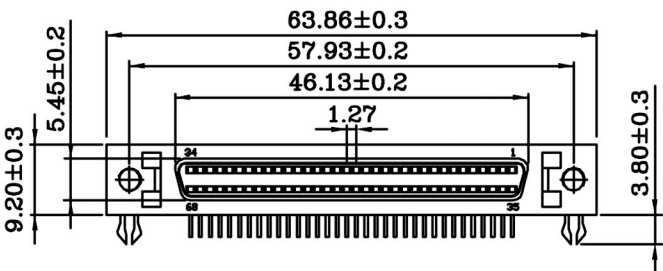

PCB Layout (B)

<p>RoHS Compliant</p>		<p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>	
<p>APPD. 核准</p>		<p>TOLERANCE 容許公差</p> <p>.0 ±</p> <p>.00 ±</p> <p>ANG. ±</p>	<p>PART NAME 品名</p> <p>SCSI-II D-SUB PCB 90° 1.27mm 68P FEMALE THREAD INSERT 2-56UNC WITH FRONT LATCH WITH BOARDLOCK SELECTIVE GOLD XXU" PLATING BLACK COLOR ROHS</p>
<p>DWG. 製圖</p> <p>Hedy</p>	<p>SCALE 比例</p> <p>參考</p>	<p>UNIT 單位</p> <p>MM</p>	<p>PART NO.</p> <p>料號 C0519-68FAZAXBR</p>
<p>DATE 制表日</p> <p>2017/09/08</p>	<p>PAGE 張數</p> <p>1 / 1</p>	<p>REV. 版次</p> <p>A</p>	