


NOTE:
PLATING OPTION:
"S": Selective Gold (**Standard option**)
 (Δ gold plating 1u")
"I": Selective Gold plating 30u"
 (contact area gold plating 30u")

WIRE OPTION	UNIT:mm		
	G	K	N
20-22AWG	2-2	2-14	1-9
24-26AWG	2-7	2-26	1-72
28-30AWG	2	1-75	1-67
	2-13	1-54	1-48

- NOTES:
- MATERIAL: PHOSPHOR BRONZE (JIS 5191) HV180°
THICKNESS=0.20mm
 - PLATING: Δ NICKEL ALL OVER. THICKNESS AT 50u"
 Δ GOLD FLASH OVER NICKEL. THICKNESS AT 0.9-1u"
 Δ GOLD PLATING OVER NICKEL. THICKNESS AT 1u"
 - QUANTITY: 10,000PCS/REEL
 - PITCH = 7.620mm

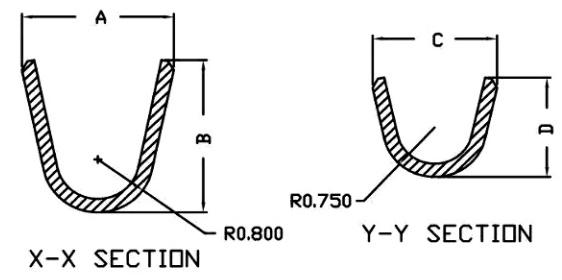

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.		
	APPD. 核准 BETTY	TOLERANCE X ±0.05 XX ±0.02 .XXX ±0.002	PART NAME 品名 1.0mm D-SUB CRIMPING FEMALE TERMINAL PHOSPHOR BRONZE MATERIAL 1ROLL=10KPCS ROHS
DWG. 製圖 Helen	SCALE 比例 參考	SIZE. 紙張尺寸 A4	PART NO. 料號 C0542-TFXPX000R
DATE 制表日 2013/12/24	UNIT 單位 MM	PAGE 張數 1 OF 1	