


Electrical

Contact Resistance : 20 milliohms Max at 1 AMP DC.
 Insulation Resistance : 1000 magohms at 500 VDC
 Dielectric Withstanding Voltage : 1000 VAC/rms 60Hz for 1 minute
 Current Rating : 3 AMP
 Voltage Rating : 250 VAC/rms 60Hz

Material

Insulator : Glass-Filled Thermoplastic PBT,UL94V-0 rated
 Contact : Brass
 Shell : Steel, refer to ordering information for plating
 Clinch Nut : Brass, 100u* min Nickel Plated.
 Screwlock : Brass, 100u* min Nickel Plated.

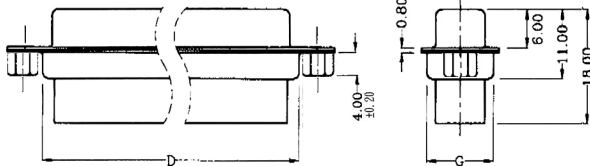

DIM M/F	A	B	C	D	E	F	G
	09	16.30	25.00	30.80	19.30	7.90	12.50
15	24.70	33.30	39.10	27.50	7.90	12.50	10.70
25	38.40	47.00	53.00	41.30	7.90	12.50	10.70
37	54.80	63.50	69.30	57.70	7.90	12.50	10.70
50	52.40	61.10	66.90	55.30	10.80	15.40	13.60

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPRO. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. 圖號 Helen	SCALE 比例 參考		D-SUB CRIMPING HOUSING XXF FEMALE REAR RIVET 3.8mm HEX OPEN RIVET BLACK ROHS
DATE 制表日 2014/7/10	UNIT 單位 M M	SIZE 規格尺寸 A 4	PART NO.
	PAGE 版數 1 / 1	REV. 版本 A	料號 C0542-XXFC EXB0R