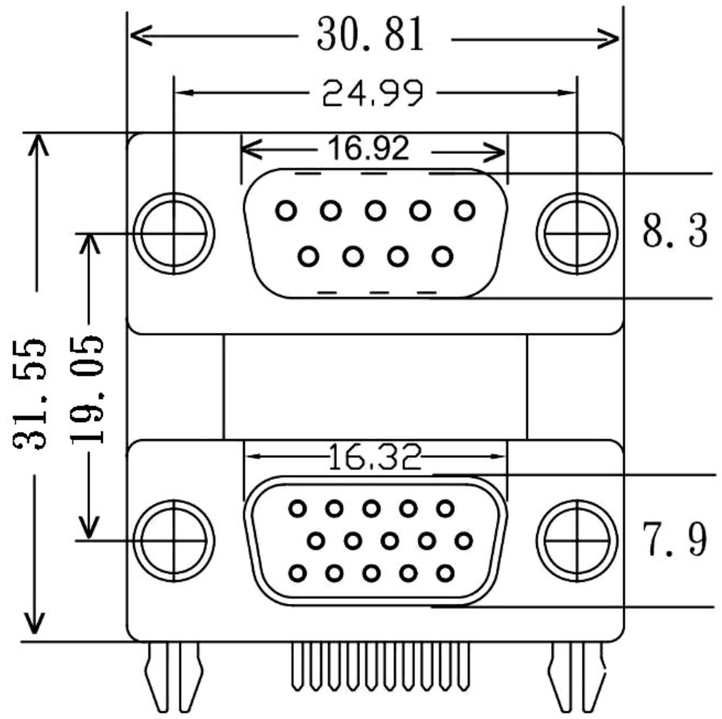

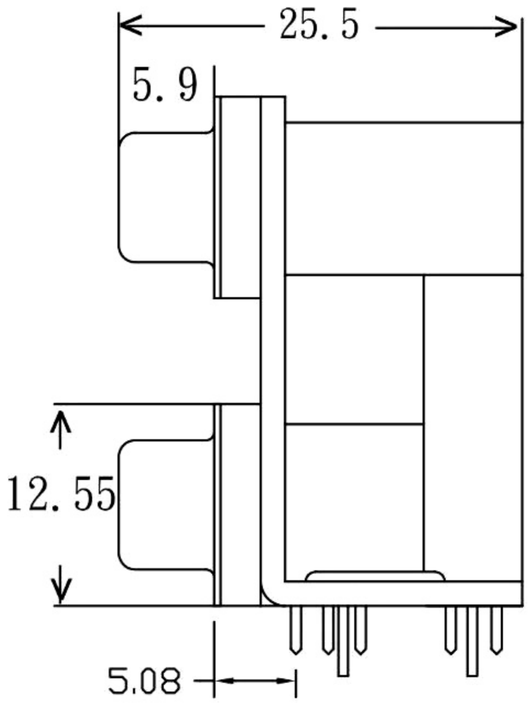

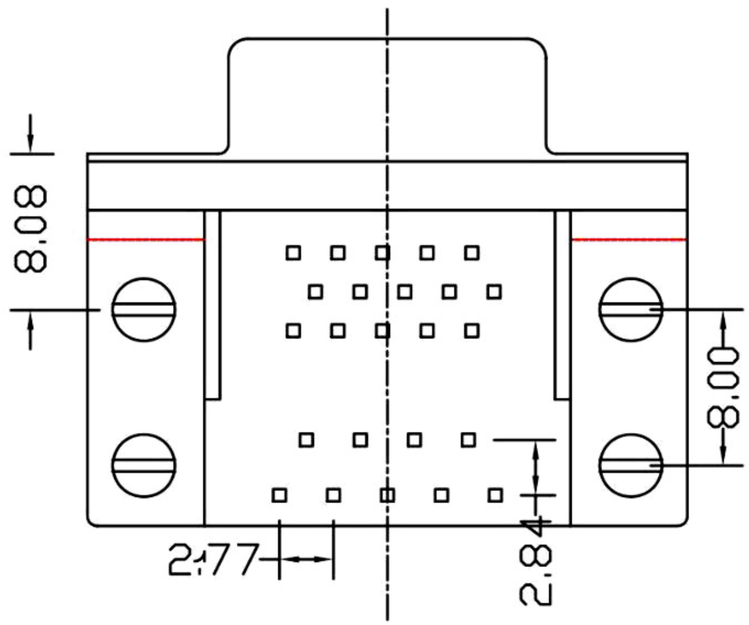

Contact Resistance:30mΩ max.at DC100mA
Insulator Resistance:1000mΩmin.at DC 500V
Current Rating:5AMP

Dielectric Withstanding
Voltage:AC 1000V For 1 minute
Operating Temperature:-55° C~+105° C
Contact:Brass
Housing:PBT&30% Glass Fiber(UL 94V-0)

P.C.B LATOUT

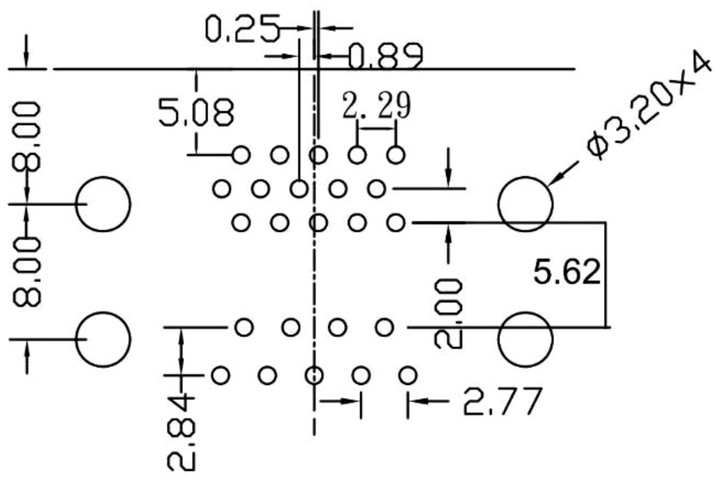

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准	SCALE 比例 參考	TOLERANCE 容許公差 .0 ± 0.25 .00 ± ANG. ±	PART NAME 品名: D-SUB RIGHT ANGLE DUAL PORT DB9M/HDD15F DUAL BOARDLOCK (CENTER LINE 7.9mm) PORT SPACING 19.05mm NON ACCESSORIES SELECTIVE GOLD PLATING BLACK INSULATOR ROHS LOW-LEAD
DWG. 製圖 HELEN	UNIT 單位 MM	SIZE. 紙張尺寸 A4	
DATE 制表日 2011/2/18	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 C0553-01BDABSBR