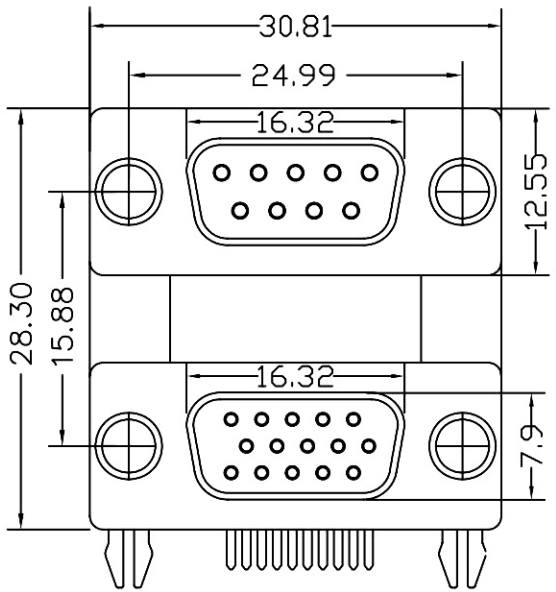

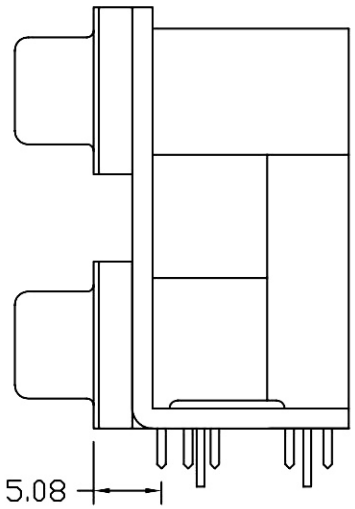

Contact Resistance:30M max. at DC 100mA
Insulator Resistance:1000M min. at DC 500V
Current Rating:5AMP

Dielectric Withstanding
Voltage:AC 1000V For 1 minute
Operating Temperature:-55 C~+105 C
Contact:Brass
Housing:PBT & 30% Glass Fiber(UL 94V-0)

P.C.B LATOUT

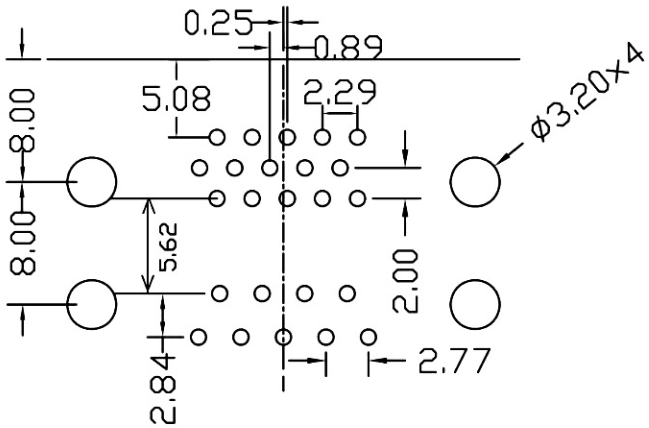

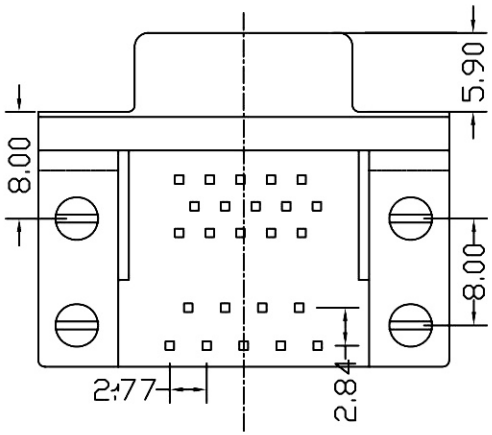

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± 0.25 .00 ± ANG. ±	PART NAME 品名 D-SUB RIGHT ANGLE DUAL PORT DB9F/HDD15F DUAL BOARDLOCK (CENTER LINE 7.9mm) NON ACCESSORIES PORT SPACING 15.875mm SELECTIVE GOLD BLACK INSULATOR ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE. 紙張尺寸 A4	
DATE 制表日 2015/04/08	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 C0553-01DDAASBR