

ROHS  
此圖面僅供參考  
以實際樣品為主

**SPECIFICATIONS**

**ELECTRICAL CHARACTERISTICS:**



Contact Current Rating: 3 Amperes.  
Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.  
Insulation Resistance: 5000 Megohms Minimum at DC 500V.  
Contact Resistance: 25 Milliohms Maximum.  
Operating Temperature: -55°C to +105°C.

**MECHANICAL CHARACTERISTICS:**

Contact Insertion Force: 341 g. Maximum.  
Contact Separation Force: 21 g. Minimum.

**MATERIALS:**

Contacts: Brass.  
Insulator: PBT UL 94V-0 Rated.  
Shell: Cold Roller Steel.  
FINISHES:  
Contact: Gold Flash.  
Shell: Nickel Plated.

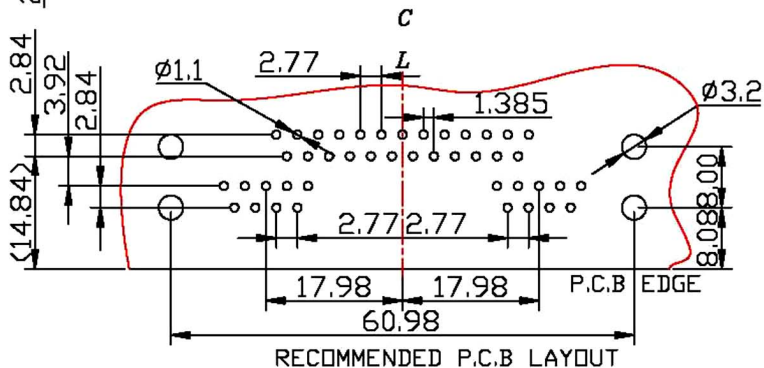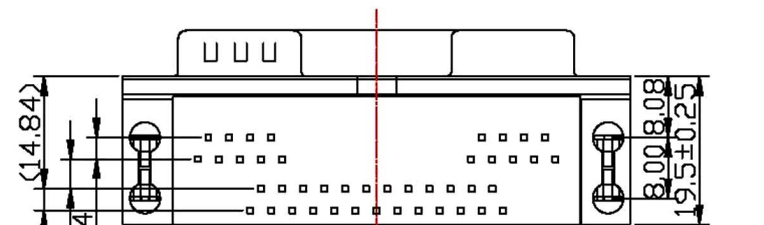

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Ivy	SCALE 比例 參考	TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 D-SUB 三胞胎 25 母對 9 公 +9 母 雙魚叉 中間線 7.9mm
DWG. 製圖 Yumi	UNIT 單位 MM	SIZE 紙張尺寸 A 4	鑽螺絲 (4.8*11.8mm) 腳距 19.05mm 半金黑膠 低鉛低銅符合 ROHS
DATE 制表日 2008/05/06	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 C0553-06IDCBSBR