


P. C. B LATOUT

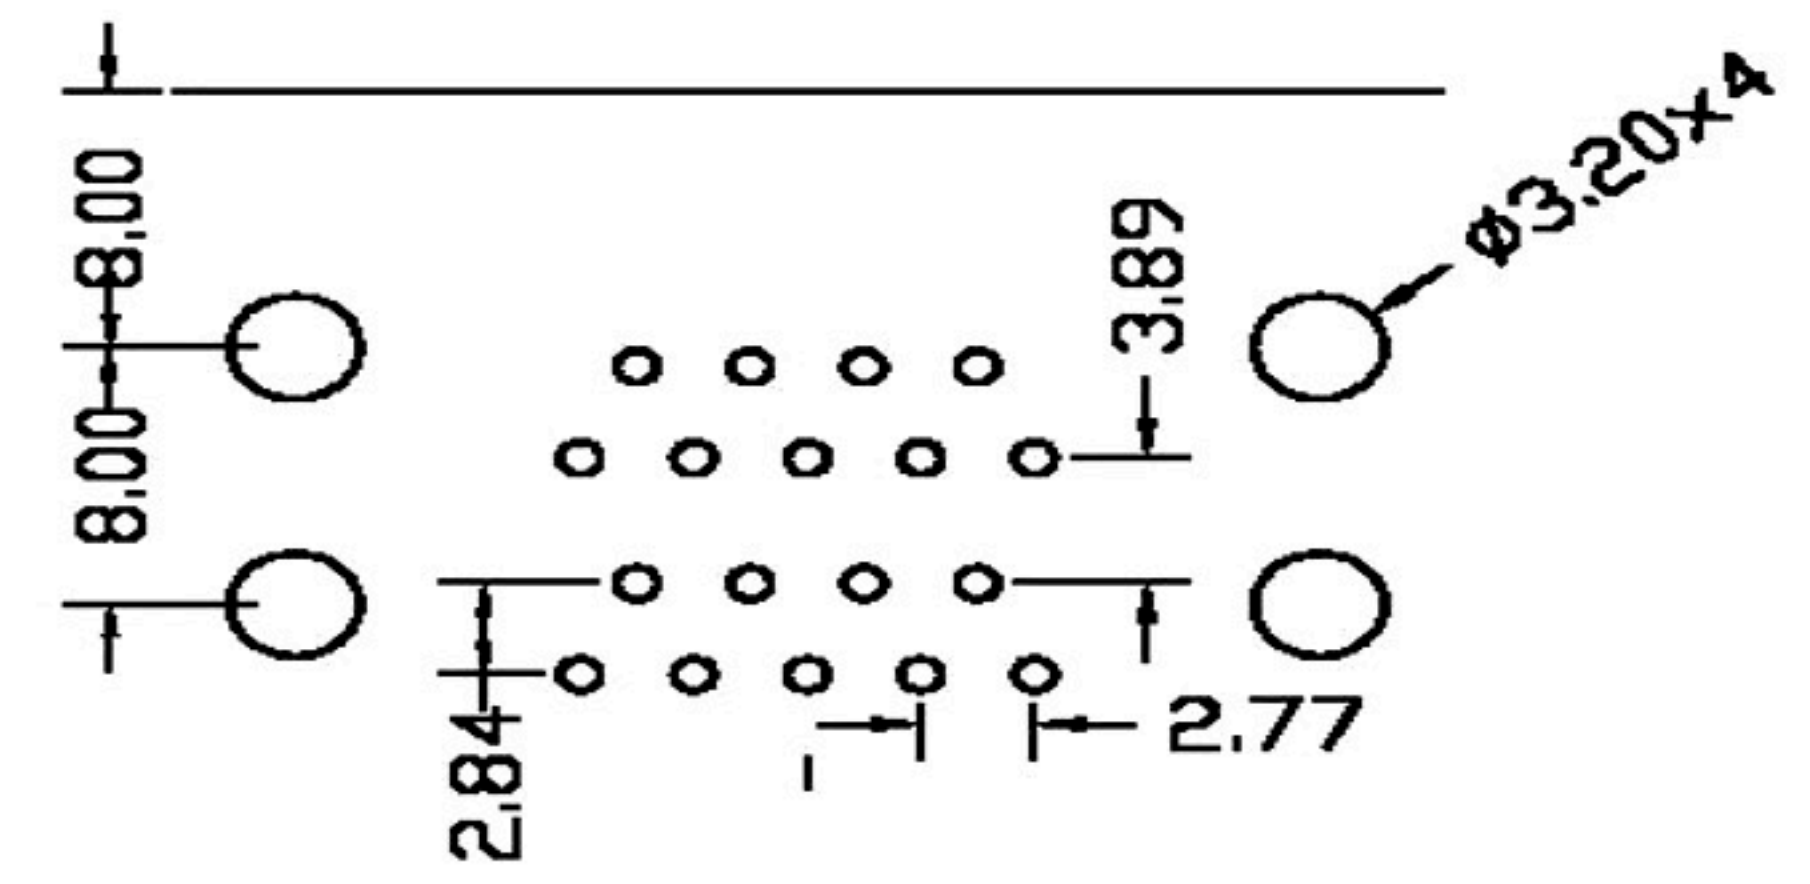

**MATERIAL:**  
**Contacts:Brass.**  
**Insulator:PBT&30% Glass Fiber ( UL 94V-0)**  
**SHELL Nickel**  
**Top connector:9-pos. Black**  
**Bottom Connector:9-pos. Black**  
**Contact Resistance:30mΩ max. at DC 100mA**  
**Insulator Resistance:1000mΩ min. at DC 500V**  
**Current Rating:5AMP**  
**Voltage:AC 1000V For 1 minute**  
**Operating Temperature:-55°C~+105°C**

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± 0.3 ANG. ±	PART NAME 品名 D-SUB RIGHT ANGLE DUAL PORT DB9M/DB9M DUAL BOARDLOCK (CENTER LINE 7.9mm) NON ACCESSORIES PORT SPACING 19.05mm BLACK INSULATOR ROHS
DWG. 製圖 Helen	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 C0553-09ADABXBR
DATE 制表日 2013/8/26	PAGE 張數 1 OF 1	REV. 版本 A	