


P. C. B LATOUT

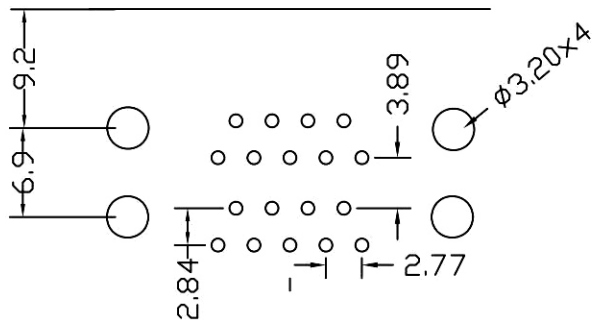

Contact Resistance: 30mΩ max. at DC 100mA
 Insulator Resistance: 1000mΩ min. at DC 500V
 Current Rating: 5AMP

Dielectric Withstanding
 Voltage: AC 1000V For 1 minute
 Operating Temperature: -55°C ~ +105°C

Contact: Brass
 Housing: PBT & 30% Glass Fiber (UL 94V-0)
 Shell: Steel Tin or Nickel

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY		TOLERANCE 容許公差 0 ± 0.3 .00 ± 0.2 ANG ±	PART NAME 品名 D-SUB RIGHT ANGLE DUAL PORT DB9M/DB9F DUAL BOARDLOCK (CENTER LINE 6.9mm) FIX SCREWS (4.8x11.8mm) PORT SPACING 19.05mm BLACK INSULATOR ROHS
DWG. 製圖 KAREN	SCALE 比例 參考	UNIT 單位 MM	PART NO. 料號 C0553-09BACBXBR
DATE 制表日 2015/06/02	PAGE 張數 1 OF 1	SIZE 紙張尺寸 A4	
		REV. 版本 A	