
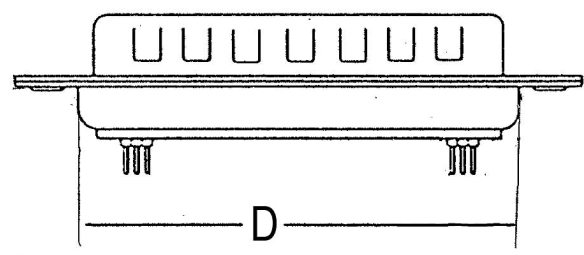
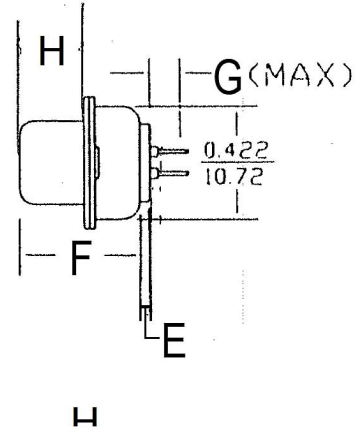


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

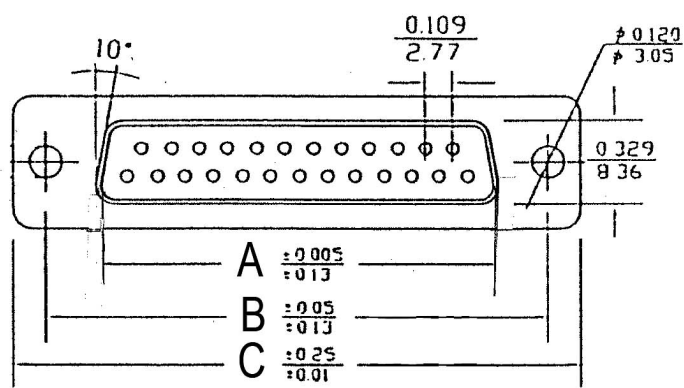

"D-SUB" CONNECTOR STRAIGHT DIP
TYPE "PLUG " MACHINED PIN
PRODUCT: ROHS
MATERIAL & FINISH
SHELL: STEEL TIN PLATED

PIN CONTACT:
BRASS
GOLD PLATED OVER NICKEL
INDULATOR:
PBT & GLASS-FIBRE REINFORCED
UL-94-V0
NUMBER OF CONTACT:
9, 15, 25, 37, 50
CURRENT RATING:
5 AMP
DIELECTRIC STRENGTH:
1000V FOR ONE MINUTE
INSULATOR RESISTANCE:
1000MΩ MIN. AT 500V DC
TEMPERATURE:
-55°C - +105°C

ITEM NO.	A	B	C	D	E	F	G	H
9P	16.92(0.666)	24.99(0.984)	30.81(1.213)	19.23(0.757)	1.0(0.0394)	10.8(0.425)	4.50(0.177)	6.00(0.236)
15P	25.25(0.994)	33.32(1.312)	39.14(1.541)	27.56(1.085)	1.0(0.0394)	10.8(0.425)	4.50(0.177)	6.00(0.236)
25P	38.96(1.534)	47.04(1.852)	53.04(2.088)	41.30(1.625)	1.0(0.0394)	10.8(0.425)	4.50(0.177)	6.00(0.236)
37P	55.42(2.182)	63.50(2.500)	69.32(2.729)	57.30(2.256)	1.0(0.0394)	10.8(0.425)	4.50(0.177)	6.00(0.236)
50P	52.86(2.081)	61.11(2.406)	66.92(2.634)	55.30(2.177)	1.0(0.0394)	10.8(0.425)	4.50(0.177)	6.00(0.236)

RoHS Compliant		HSM 玄茂科技股份有限公司 HSIUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE .X ±0.30 .XX ±0.25 .XXX ±0.15 ANG. ±2°	PART NAME 品名 D-SUB PCB STRAIGHT MACHINED PIN XXP FEMALE TIN SHELL+DIMPLE GOLD PLATING ROHS
DWG. 製圖 HELEN	SCALE 比例 參考	UNIT 單位 MM	PART NO. 料號 C0571-XXMAAAGXR
DATE 制表日 2017/1/25	PAGE 張數 1 OF 1	SIZE 紙張尺寸 A4	REV. 版次 A

1 2 3 4 5 6 7 8