


D-SUB MACHINED PIN CONNECIOR
RIGHT ANGLE TYPE

SERIES	DM-7.2
FOOT-PRINT	0.283 7.19

DIMENSIONS(MALE)

SHELL SIZE	A	B	C	D	E
	0.010 0.25	0.005 0.13	0.015 0.38	0.010 0.25	0.015 0.38
9	0.666 16.92	0.984 24.99	1.213 30.81	0.759 19.28	0.426 10.82
15	0.994 25.25	1.312 33.32	1.541 39.14	1.083 27.51	0.426 10.82
25	1.534 38.96	1.852 47.04	2.088 53.04	1.625 41.28	0.426 10.82
37	2.182 55.42	2.500 63.50	2.729 69.32	2.272 57.71	0.429 10.90
50	2.079 52.81	2.406 61.10	2.635 66.93	2.178 55.32	0.429 10.90

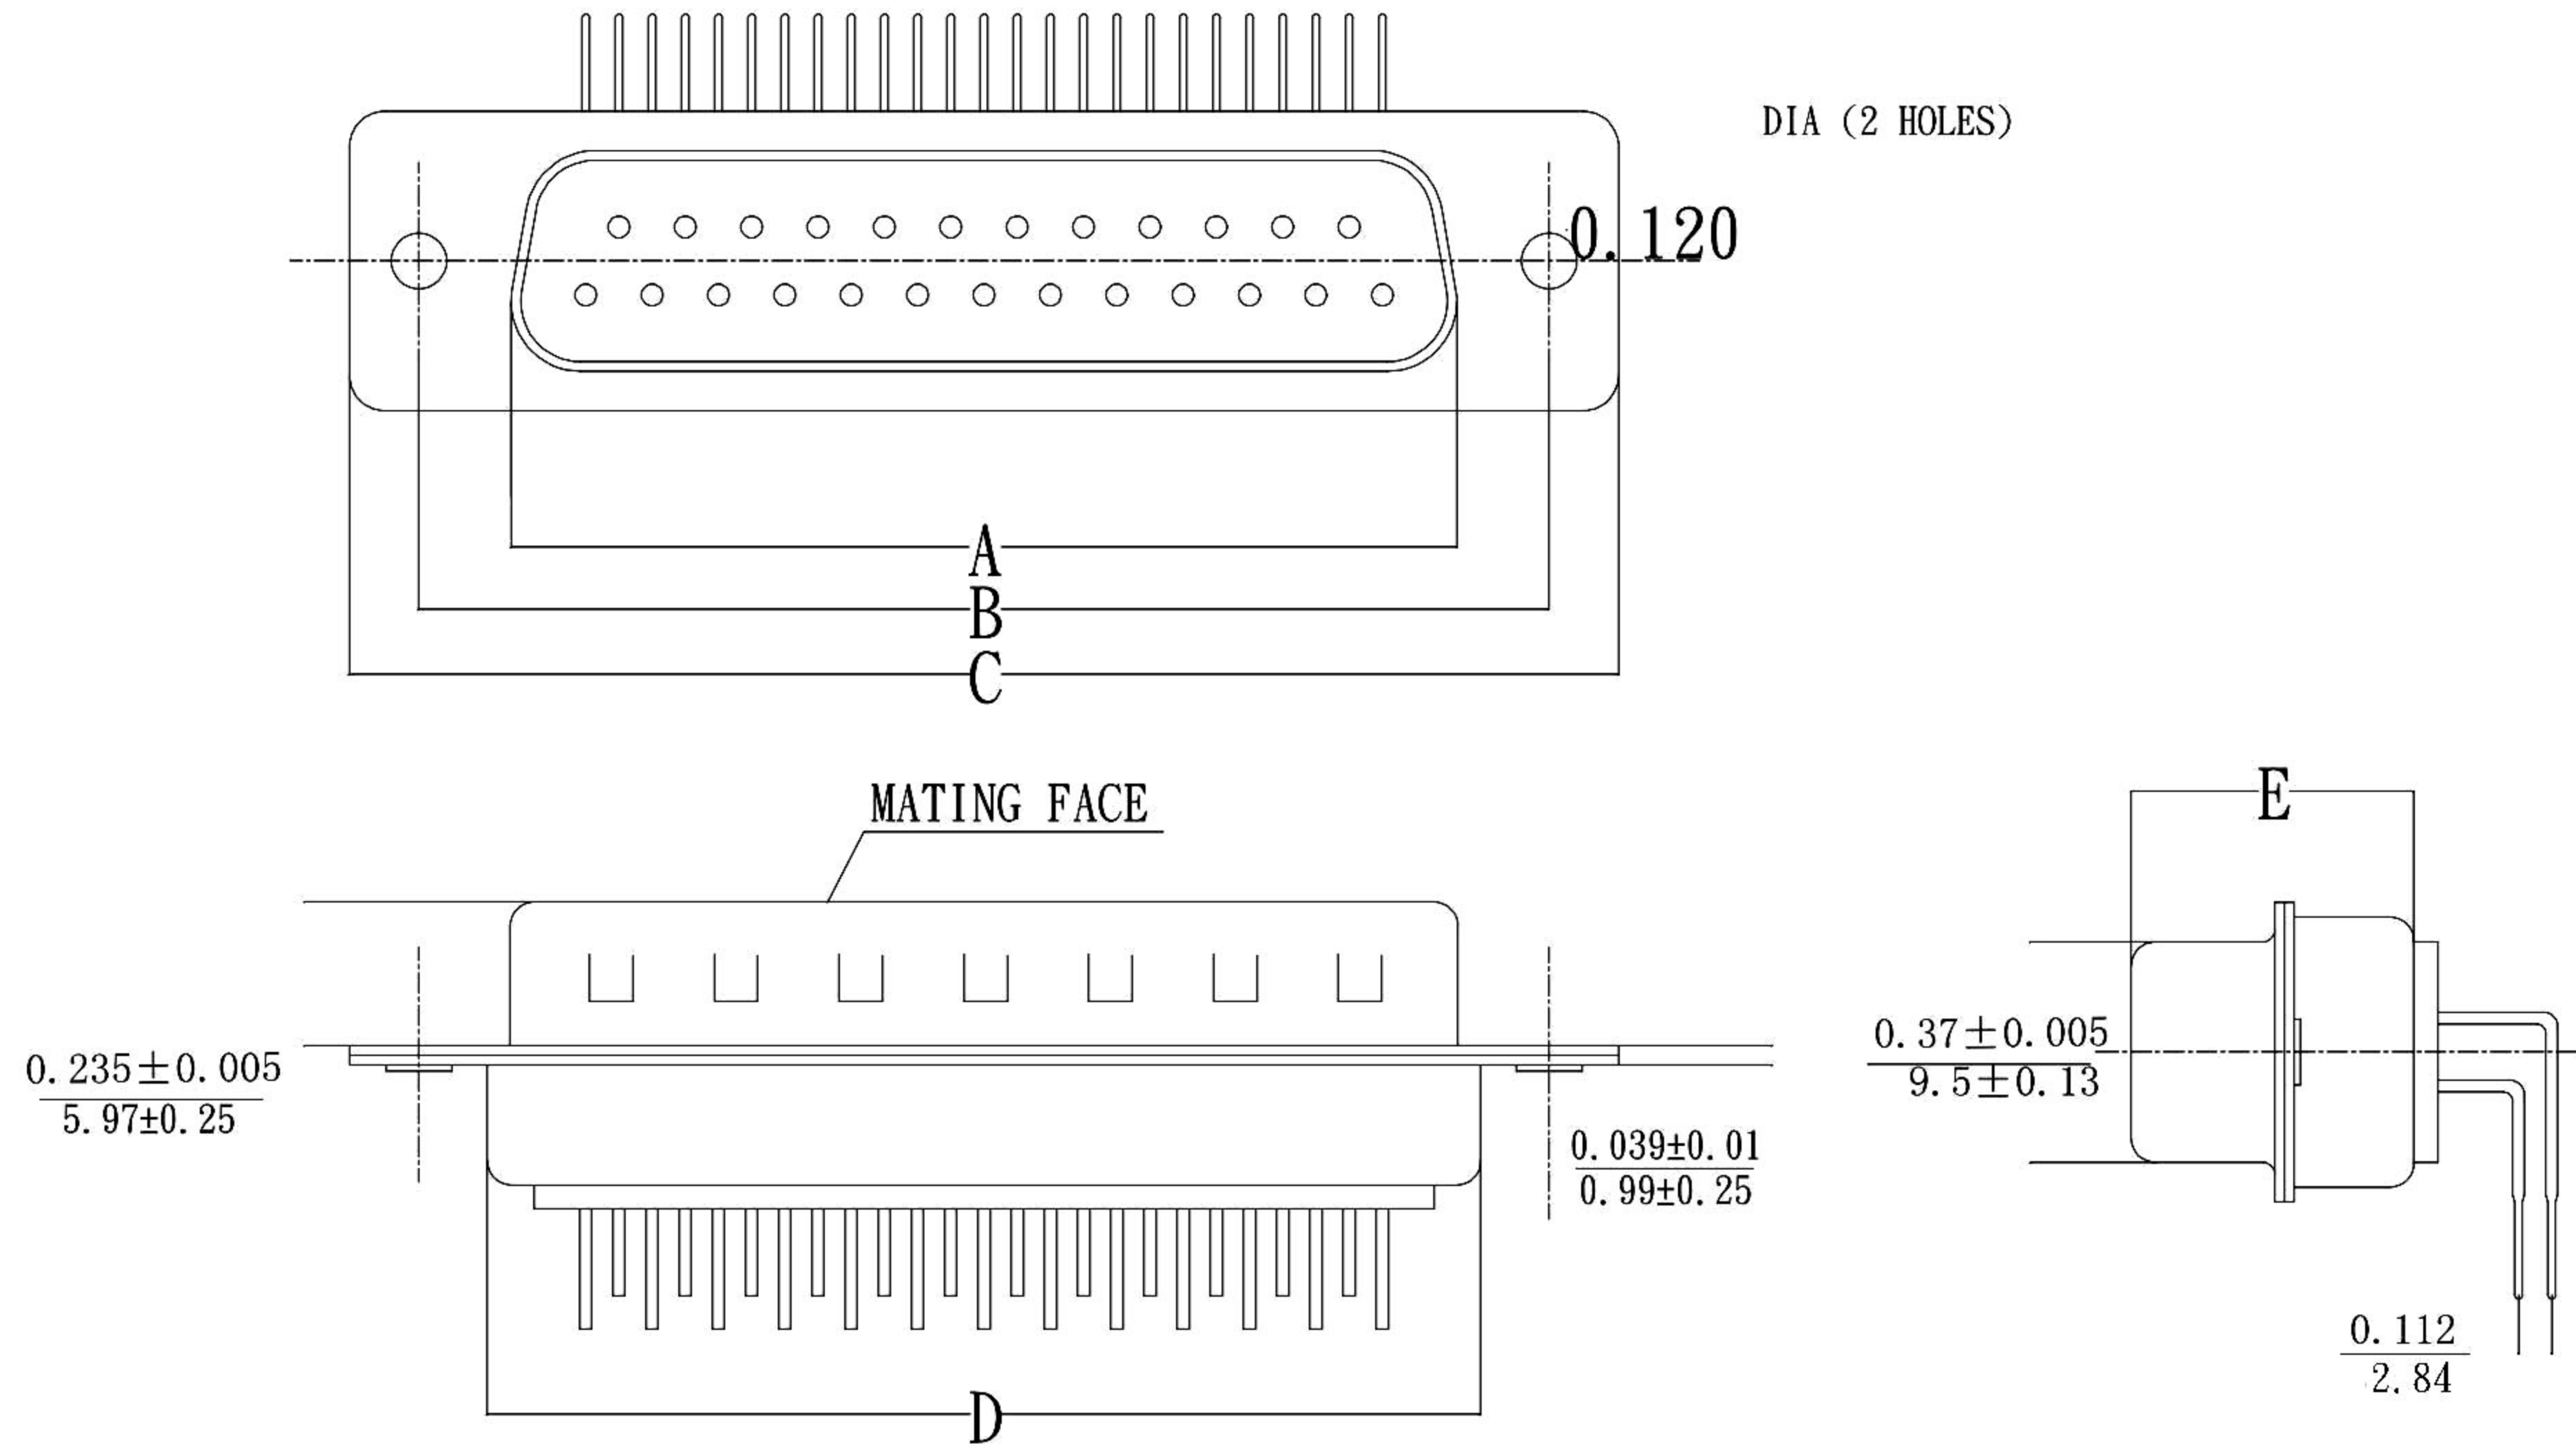

MATERIAL & FINISH

SHELL: STEEL TIN PLATED

PIN CONTACT: BRASS

INSULATOR: PBT & GLASS-FIBRE REINFORCED

CURRENT RATING: 5 AMP.

DIELECTRIC STRENGTH: 1000V FOR ONE MINUTE

INSULATOR RESISTANCE: 1000M MIN. AT 500V DC

TEMPERATURE: -55°C ~ 105°C



HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.		TOLERANCE	PART NAME 品名
DWG. Helen		.0 ± .00 ± ANG. ±	
DATE 2016/5/19	UNIT M M	SIZE. A 4	PART NO. 料號 C0572-XXMAAAGWR
	PAGE 1 OF 1	REV. B	