



15 POSITION

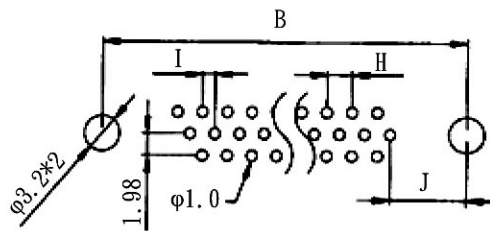

26, 44, 62 POSITION

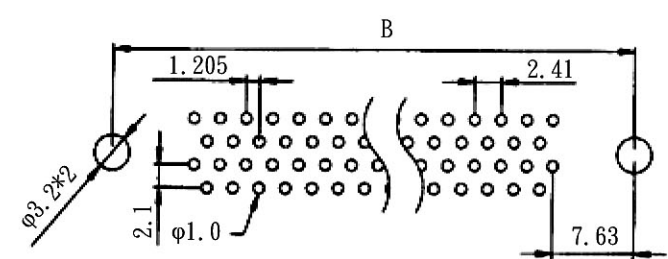

78 POSITION

PIN	A	B	C	D	E	F	G	H	I	J
15P	16.33(0.643)	24.99(0.984)	30.81(1.213)	19.28(0.759)	1.2(0.047)	11.0(0.433)	4.8(0.189)	2.29(0.090)	1.145(0.045)	7.04(0.277)
26P	24.66(0.910)	33.32(1.312)	39.14(1.541)	27.51(1.083)	1.2(0.047)	11.0(0.433)	4.8(0.189)	2.29(0.090)	1.145(0.045)	6.88(0.270)
44P	38.38(1.511)	47.04(1.852)	53.04(2.088)	41.30(1.625)	1.2(0.047)	11.0(0.433)	4.8(0.189)	2.29(0.090)	1.145(0.045)	6.88(0.270)
62P	54.84(2.159)	63.50(2.500)	69.32(2.729)	57.71(2.272)	1.2(0.047)	11.0(0.433)	4.8(0.189)	2.41(0.094)	1.205(0.047)	7.0(0.275)
78P	52.34(2.060)	61.11(2.406)	66.92(2.634)	55.30(2.177)	1.2(0.047)	11.0(0.433)	4.8(0.189)			

MATERIAL & FINISH

SHELL:
STEEL NICKEL PLATED

PIN CONTACT:
GOLD PLATED OVER NICKEL

INSULATOR:
PBT & GLASS-FIBRE REINFORCED

NUMBER OF CONTACT:
15, 26, 44, 62, 78

CURRENT RATING:
5 AMP.

DIELECTRIC STRENGTH:
1000V FOR ONE MINUTE

INSULATOR RESISTANCE:
1000MΩ MIN. AT 500V DC

TEMPERATURE:
-55°C ~ +105°C

**RoHS
Compliant**

**HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.**

APPD.		TOLERANCE	PART NAME 品名
DWG.		.0 ±0.35 .00 ± ANG. ±	
DATE	UNIT 参考	SIZE.	PART NO. 料號 C0575-XXFIANGXR
2018/12/18	Betty	A 4 B	
	PAGE 1 OF 1	REV.	