



15 POSITION

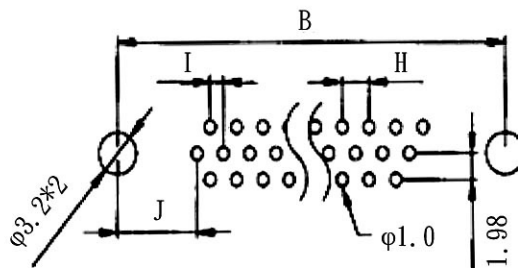

26, 44, 62 POSITION

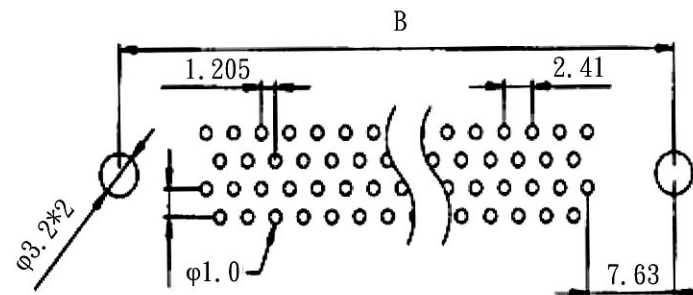

78 POSITION

PIN	A	B	C	D	E	F	G	H	I	J
15P	16.92(0.666)	24.99(0.984)	30.81(1.213)	19.28(0.759)	1.2(0.047)	11.0(0.433)	4.6(0.18)	2.29(0.090)	1.145(0.045)	7.04(0.277)
26P	25.25(0.994)	33.32(1.312)	39.14(1.541)	27.51(1.083)	1.2(0.047)	11.0(0.433)	4.6(0.18)	2.29(0.090)	1.145(0.045)	6.88(0.270)
44P	38.96(1.534)	47.04(1.852)	53.04(2.088)	41.10(1.618)	1.2(0.047)	11.0(0.433)	4.6(0.18)	2.29(0.090)	1.145(0.045)	6.88(0.270)
62P	55.42(2.182)	63.50(2.500)	69.32(2.729)	57.40(2.260)	1.2(0.047)	11.0(0.433)	4.6(0.18)	2.41(0.094)	1.205(0.047)	7.0(0.275)
78P	52.86(2.060)	61.11(2.406)	66.92(2.634)	54.90(2.161)	1.2(0.047)	11.0(0.433)	4.6(0.18)			

**MATERIAL & FINISH**

**SHELL:**

STEEL NICKEL PLATED

**PIN CONTACT:**

GOLD PLATED OVER NICKEL

**INSULATOR:**

PBT & GLASS-FIBRE REINFORCED

**NUMBER OF CONTACT:**

15, 26, 44, 62, 78

**CURRENT RATING:**

5 AMP.

**DIELECTRIC STRENGTH:**

1000V FOR ONE MINUTE

**INSULATOR RESISTANCE:**

1000MΩ MIN. AT 500V DC

**TEMPERATURE:**

-55°C ~ +105°C



**HSM 玄茂科技股份有限公司**  
**HSUAN MAO TECHNOLOGY CO., LTD.**

APPD.	 SCALE 参考 UNIT inch/mm	TOLERANCE .0 ±0.35 .00 ± ANG. ±	PART NAME 品名 HIGH DENSITY D-SUB PCB STRAIGHT TYPE XXP MALE REAR RIVET 6mm BOARDLOCK NON ACCESSORIES GOLD FLASH PLATING ROHS
DWG. Betty		SIZE. A 4	
DATE 2018/12/18	PAGE 1 OF 1	REV. B	PART NO. 料號 C0575-XXMIABGXR