


SECTION C-C

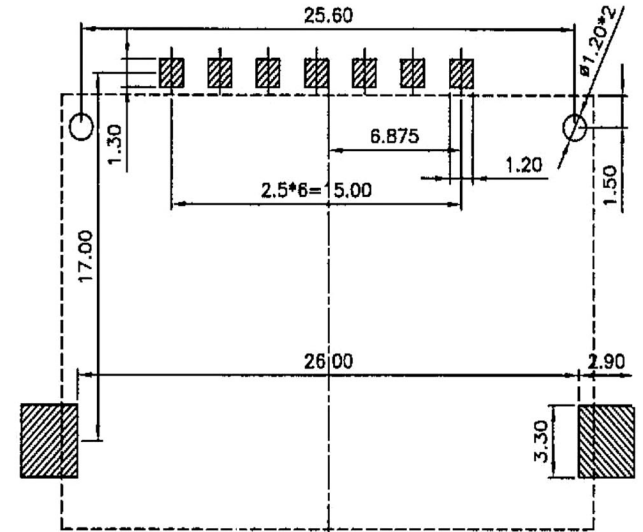

RECOMMENDED P.C.B LAYOUT (TOP VIEW)
TOLERANCES: ±0.05mm

SPECIFICATION

(1) MATERIAL:

Insulator: Thermal Plastic UL94V-0
Contacts: Copper Alloy
Boardlock: Copper Alloy

(2) CONTACT PLATING:


Underplated: 50u" Nickel
Contact area: 1u"~30u" Selective gold
Solder tail area: 100u" Tin/Lead(Brighten Tin) or
100u" Tin/Lead Free(Brighten Tin/Matte Tin)

(3) ELECTRICAL:

Current rating: 1A max.
Contact resistance: 100 mohms max.
Insulation resistance: 1000 Mohms min.

(4) MECHANICAL:

Mating cycle: 5000 cycles min.
Operating temperature: -40°C min / +85°C max.

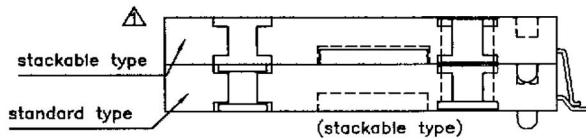

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY	SCALE 比例 参考	TOLERANCE 容許公差 0 ±0.3 .00 ±0.2 ANG. ±	PART NAME 品名 MMC CARD 7P STANDARD TYPE TWO LAYERS BLACK INSULATOR ROHS LOW-LEAD
DWG. 製圖 BETTY	UNIT 單位 MM	SIZE 紙張尺寸 A 4	PART NO. 料號 C0611-07DABXB0R
DATE 制表日 2007/11/22	PAGE 張數 1 OF 1	REV. 版次 A	