

Notes:

Material: Phosphor Bronze(C5191-H)

SIM Card Connector,With

Housing: Lcp UL 94V-0 Black

On The Cover Sus 304

FINISH : Terminal Half Gold Fog Tin Plating

The Terminal Plating Nickel Is Minimal 50μ

Gold plated contact pin 3μ

Tin Welding Point Is Minimal 100μ

Specifications:

Voltage Current Rating: 1A, 50V AC

Insulation Resistance: 1000Mohm Min

Contact Withstanding Voltage:

AC 500V For 1 Minute

Temperture Rating: -40° To $+85^{\circ}$

Durability: 100000 Cycles Min

IR Re-Flow: 260°C 15Sec Max

RoHS
Compliant


HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准
Betty
DATE 制表日
2016/11/24

SCALE 比例 参考
UNIT 單位 MM
PAGE 張數 1 OF 2

TOLERANCE UNLESS OTHERWISE SPECIFIED
.X \pm 0.25 X \pm
.XX \pm 0.15 X \pm 2'
.XXX \pm 0.10 XX \pm 1'
SIZE 紙張尺寸 A 4
REV. 版次 B

PART NAME 品名
SIM CARD CONNECTOR 6P SMT TYPE
SELECTIVE GOLD PLATING WITH SWITCH
BLACK COLOR REEL PACKING ROHS
PART NO.
料號 C0643-06DSYBR0R


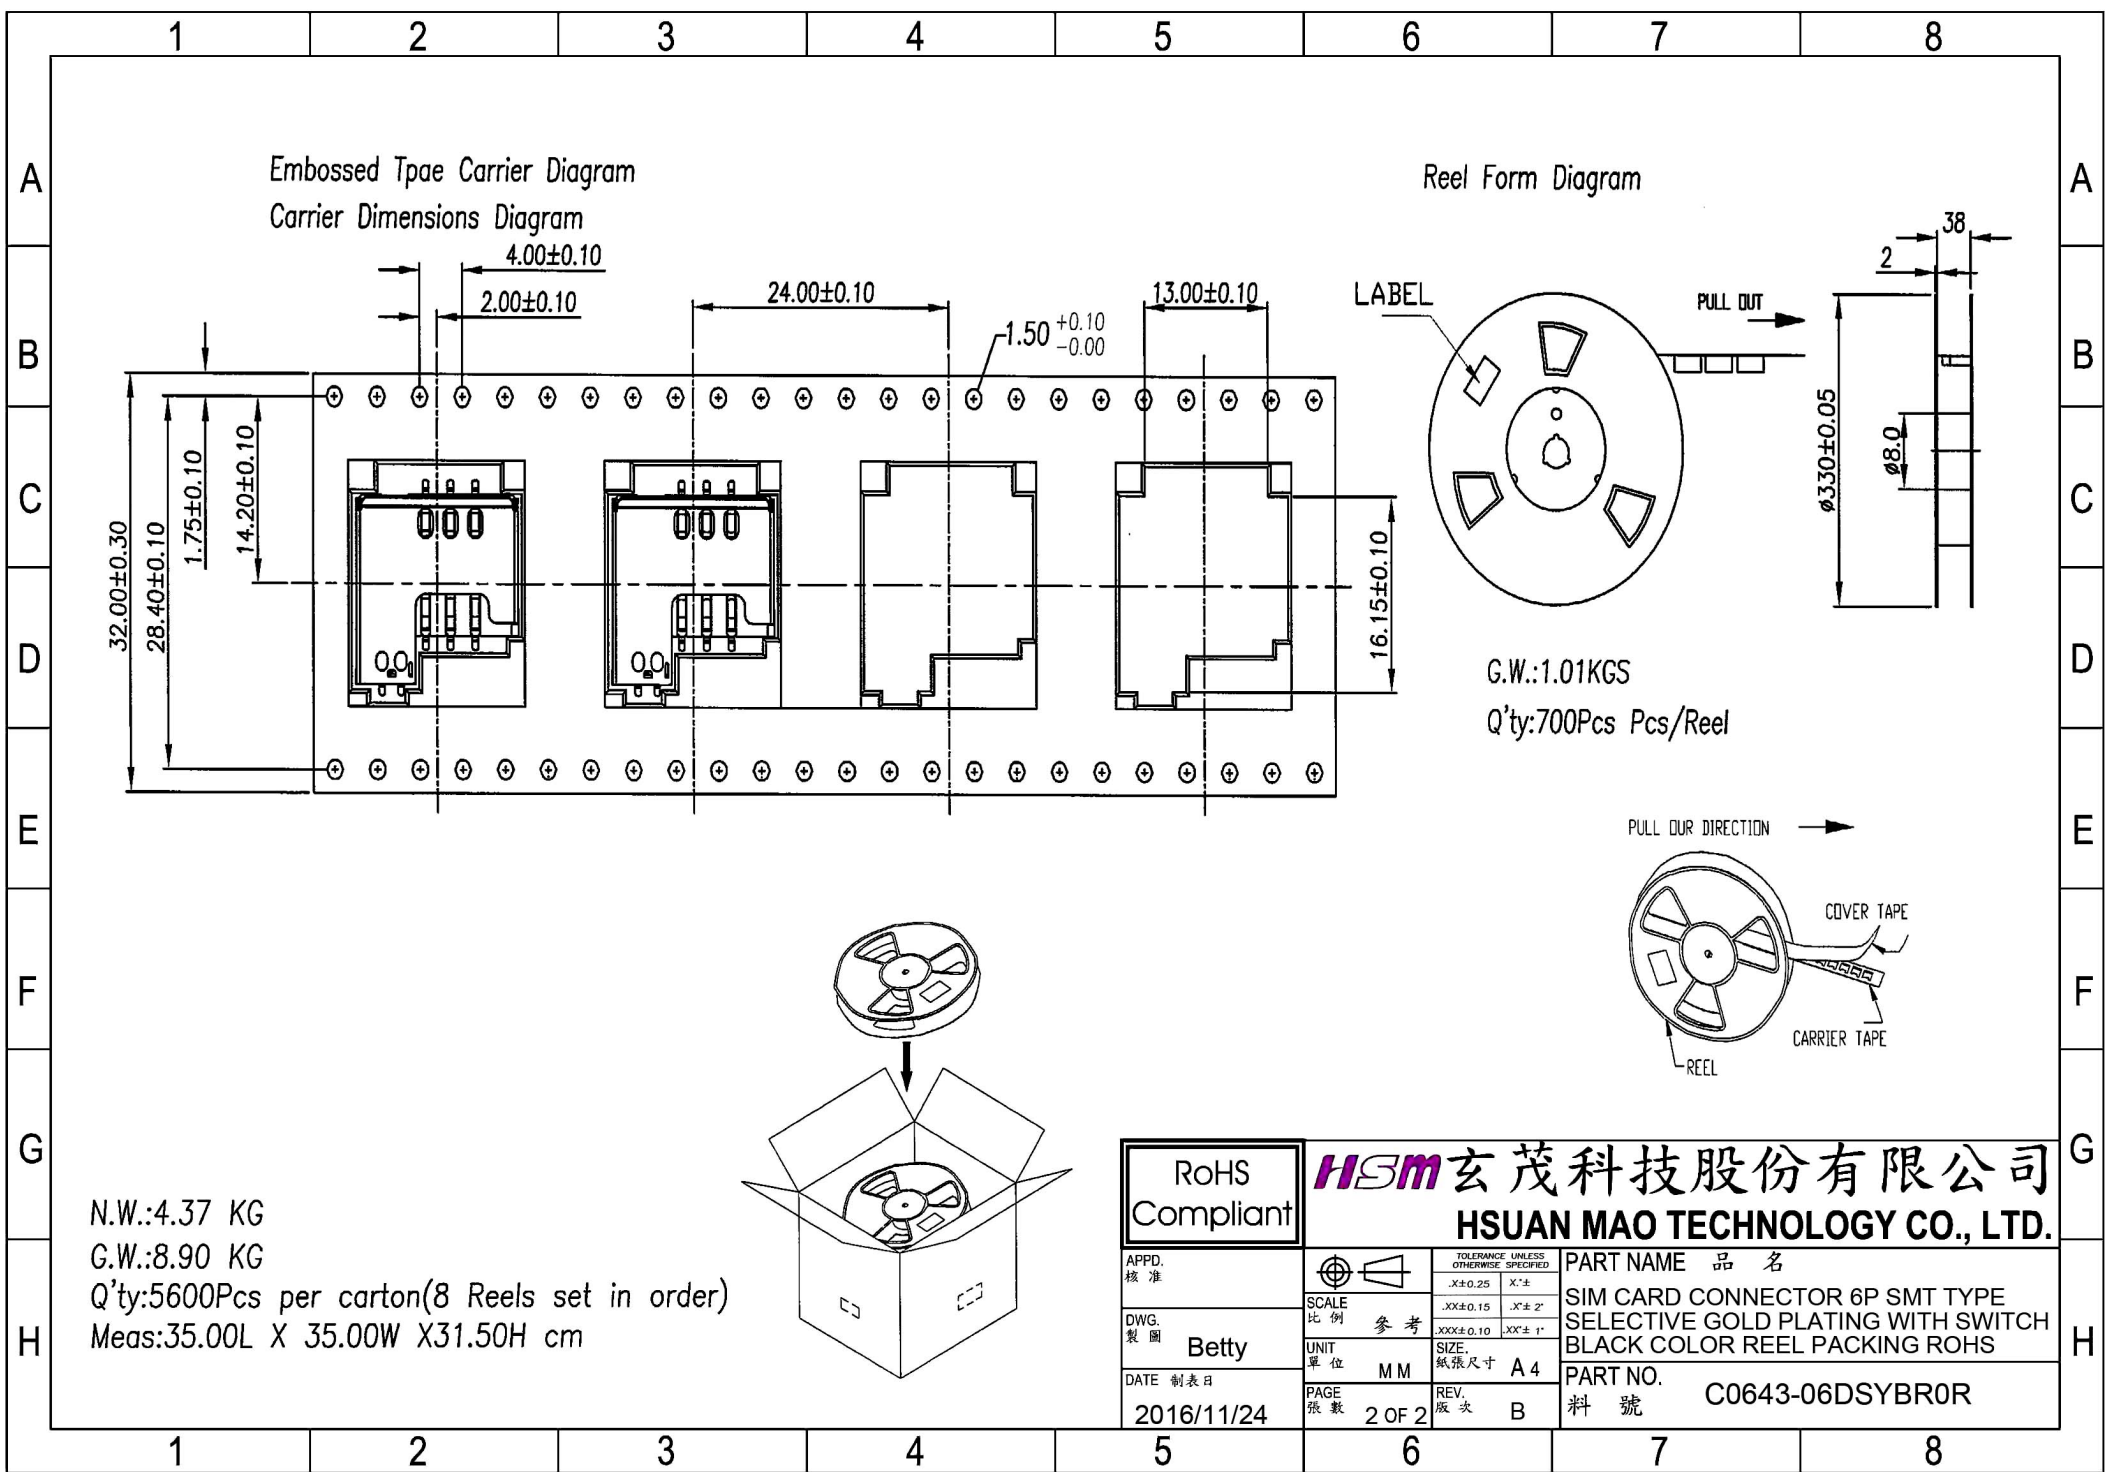


Embossed Tape Carrier Diagram
Carrier Dimensions Diagram

Reel Form Diagram

G.W.:1.01KGS
Q'ty:700Pcs Pcs/Reel

N.W.:4.37 KG
G.W.:8.90 KG
Q'ty:5600Pcs per carton(8 Reels set in order)
Meas:35.00L X 35.00W X31.50H cm

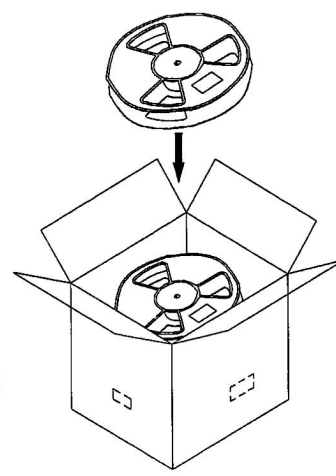

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE UNLESS OTHERWISE SPECIFIED	PART NAME 品名
DWG. 製圖	Betty	.X±0.25 X'±	SIM CARD CONNECTOR 6P SMT TYPE
DATE 制表日	2016/11/24	.XX±0.15 X'± 2"	SELECTIVE GOLD PLATING WITH SWITCH
		.XXX±0.10 XX'± 1"	BLACK COLOR REEL PACKING ROHS
		SIZE 紙張尺寸	PART NO.
		UNIT 單位	料號
		PAGE 張數	C0643-06DSYBR0R
		REV. 版次	
		2 OF 2	
		B	