
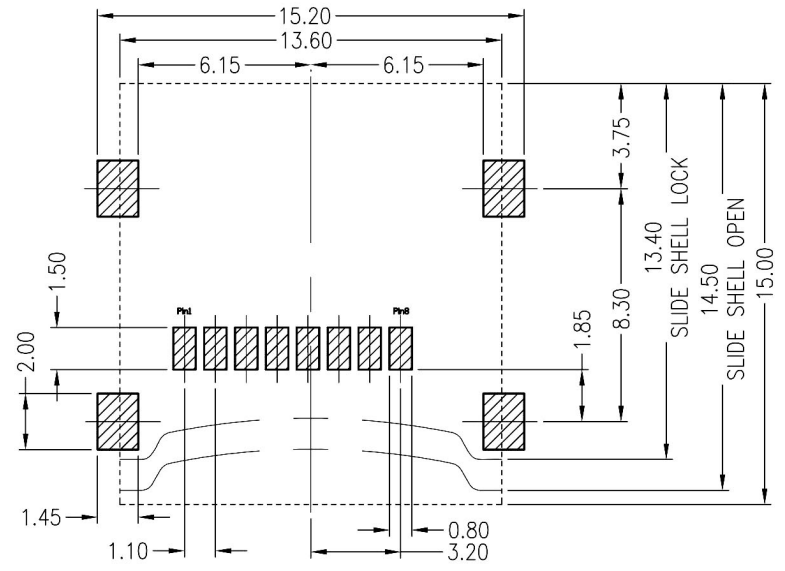


SLIDE SHELL OPEN SLIDE SHELL LOCK



RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

MATERIALS

- HOUSING : HI-TEMP PLASTIC UL 94V-0.
- TERMINAL: COPPER ALLOY.
PLATING: GOLD PLATED ON CONTACT AREA,
G/F GOLD PLATED ON SOLDER TAILS.
- SHELL : STANLESS STEEL.
PLATING : 50u" NICKEL UNDER, 100u" TIN OVERALL.

SPECIFICATION

- CURRENT RATING : 0.5A MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R. M. S. FOR 1 MINUTE.
- INSULATION RESISTANCE : 100MΩ MIN. AT 500V DC.
- CONTACT RESISTANCE : 50mΩ MAX.
SWITCH RESISTANCE : 100mΩ MAX.
- DURABILITY : 5000 CYCLES.
- OPERATING TEMPERATURE : -30° C TO +85° C.

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	UNLESS OTHERWISE SPECIFIED TOLERANCES	PART NAME 品名
DWG. 製圖 Betty	UNIT 單位 MM	US. METRIC	T-FLASH CONNECTOR 8P HINGE TYPE SMT TYPE
DATE 制表日 2019/06/06	PAGE 張數 1 OF 1	SIZE. 紙張尺寸 A 4	STAND OFF 0mm SELECTIVE GOLD PLATING WITHOUT LOCATING PEG
		REV. 版次 A	BLACK COLOR REEL PACKING ROHS
			PART NO. 料號 C0644-08DASNBR2R