

ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 1 AMPERES.
 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V R.M.S
 INSULATION RESISTANCE: 500 MEGOHMS MINIMUM AT DC 500V.
 CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM.
 OPERATING TEMPERATURE: -55C TO 105C.

MECHANICAL CHARACTERISTICS:


CONTACT INSERTION FORCE: 2.5 KG MAXIMUM.
 CONTACT SEPARATION FORCE: 2.0 KG MINIMUM.

MATERIALS:

CONTACT: BRASS.
 INSULATOR: P.B.T. UL 94-V0 RATED.(D202G30)
 SHELL: COLD ROLLED STEEL.(JIS G3141)

FINISHES:

CONTACTS:GOLD PLATED.
 SHELL:NICKEL PLATED.

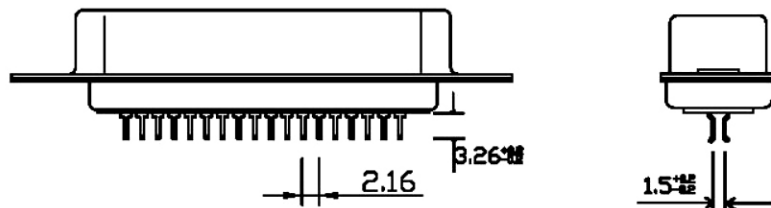

PART NO.	A±0.2	B±0.2	C±0.2	D±0.03	E±0.2
14	43.92	35.99	25.2	15.3	11.9
24	54.71	46.79	36.0	15.3	11.9
36	67.69	59.74	48.9	15.3	11.9
50	82.78	74.85	64.0	15.3	11.9

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 HELEN
 DWG. 製圖 ABBY
 DATE 制表日 2011/06/03

SCALE 比例 參考
 UNIT 單位 MM
 PAGE 張數 1 OF 1

TOLERANCE 容許公差
 0 ±
 .00 ±
 ANG. ±
 SIZE. 紙張尺寸 A4
 REV. 版次 A

PART NAME 品名
 CENTRONIC EDGE TYPE XXP FEMALE 1.6MM STRADDLE
 SPACING PANEL TYPE W/O LATCH THROUGH HOLE
 NICKEL SHELL BLUE INSULATOR
 SELECTIVE GOLD PLATING ROHS

PART NO.
 料號 C0711-XXFAASL0R