


P.C.B. LAYOUT(REF)
S=5:1

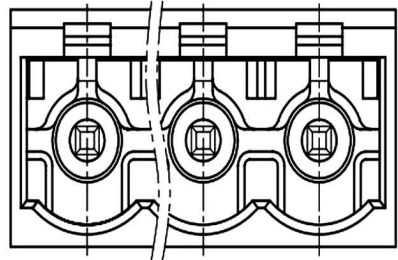

NOTES 1:

UL Standard :

1. Rating: 300V 15A
2. Insulation Withstands Voltage: AC 2000V at 1 minute
3. Using Temperature Range: -40°C~+115°C

IEC Standard :

- Rating: 600V 18A
2. Rate Impulse Voltage: 4000V
3. Insulation Resistance: 500MΩ or more at DC500V
4. Material Group : I
5. Pollution Degree : 2
6. Overvoltage Category: II
7. Using Temperature Range: -40°C~+110°C

Normal Geometric Tolerancing			
-	//	≡	⊥
0 to 100	0.2	0 to 10	0.2
over 100 to 150	0.3	over 10	0.3
over 150	0.5		
Total Pitch Tolerances		Normal dimension Tolerances	
0d≤30	±0.20	0~30	±0.25
30d≤53	±0.25	over 30~53	±0.30
53d≤70	±0.30	over 53~70	±0.35
70d≤90	±0.35	over 70~90	±0.44
90d≤115	±0.44	over 90~115	±0.55
115d≤150	±0.55	over 115~150	±0.70
150d≤200	±0.70	over 150~200	±0.85
200d≤250	±0.85	over 200~250	±1.00
250d≤320	±1.00	over 250~320	±1.20

2	SOLDER PIN	COPPER ALLOY	TIN PLATED
1	HOUSING	PA	UL94-V0 GREEN
ITEM	NAME OF PART	MATERIAL	NOTES

P	2	3	4	5	6	7	8	9	10	11	12	
U	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	
P	13	14	15	16	17	18	19	20	21	22	23	24
U	60.00	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准
Betty
DATE 制表日
2015/11/18

SCALE 比例 参考
UNIT 單位 M M
PAGE 張數 1 OF 1

TOLERANCE 容許公差
.0 ±
.00 ±
ANG. ±
SIZE 紙張尺寸 A 4
REV. 版次 B

PART NAME 品名
5.0mm TERMINAL BLOCK PCB TYPE
XXP 180° GREEN COLOR
FOUR COVERS & WITHOUT SCREWS
ROHS

PART NO. 料號
C0906-XXSTEC00R