

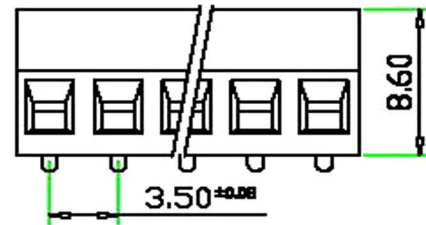
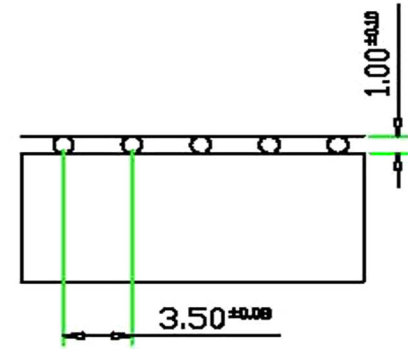


**SPECIFICATIONS**

- ① Housing Material: Polyamide 66(UL94V-0), Green
- ② Screw: M2.0 Nickel Plated Steel
- ③ Terminals: Tin Plated Brass

Screws Torque: 1 In-Lb  
 Wier Range: 16~24 AWG  
 Rated: 10 Amperes.AC300V  
 Pperation Temperature: -55°C~+115°C  
 Insulation withstands volt: AC2000V min  
 Insulation resistance: >1000MΩ or more at DC500V

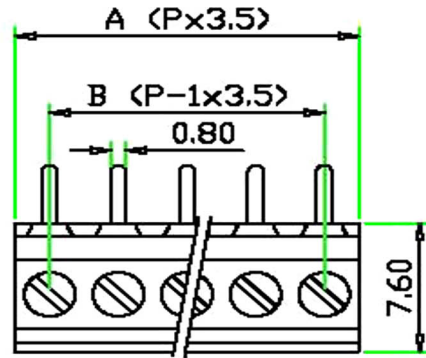

POLE	2	3	4	5	6	7	8	9	10	11	12			
A	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5	42			
B	3.5	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5			
POLE	13	14	15	16	17	18	19	20	21	22	23	24	25	26
A	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77	80.5	84	87.5	91
B	42	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77	80.5	84	87.5

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY		TOLERANCE 容許公差 .0 ± 0.5 .00 ± ANG. ±	PART NAME 品名 3.5mm TERMINAL BLOCK XXP RIGHT ANGLE TYPE H=8.6mm SUITABLE FOR 16-24AWG TIN PLATED GREEN INSULATOR ROHS LOW-LEAD
DWG. 製圖 BETTY	SCALE 比例 參考	UNIT 單位 M M	PART NO. 料號 C0914-XXR3TE00R
DATE 制表日 2009/02/13	PAGE 張數 1 OF 1	REV. 版次 A	