


Material
 Screw:M2, steel, Zinc-plated
 Contact:Brass,Nickel-plated
 Pin Header:Brass,Tin-plated
 Housing:PA66, UL94V-0

Electrical
 Rated Voltage:150V
 Rated Current:10A
 Contact Resistance:20mΩ,
 Insulation Resistance:5000mΩ/1000V
 Withstand Voltage:AC1500V/1Min
 Wire Range:26-16AWG 1.0mm²

Mechanical
 Temp. Range:-40°C /+105°C
 Max Soldering:+250°C 5Sec.
 Torque: 0.2Nm (1.8lv. in)
 Strip Length:5-6mm

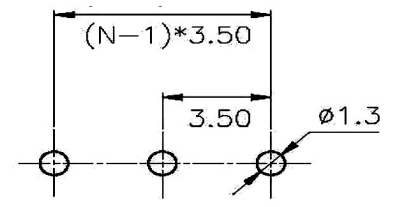

RECOMMEND PCB LAYOUT (TOLERANCE=±0.05)

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN		TOLERANCE X: ±0.60 .X: ±0.38 .XX: ±0.25 X: ±0.25 X: ±0.25	PART NAME 品名 3.5mm TERMINAL BLOCK XXPIN STRAIGHT H=8.6mm 16-26AWG TIN PLATED GREEN INSULATOR ROHS
DWG. 製圖 ABBY	SCALE 比例 參考	UNIT 單位 M M	PART NO. 料號 C0914-XXS6TE00R
DATE 制表日 2015/10/23	PAGE 張數 1 OF 1	SIZE 紙張尺寸 A 4	
		REV. 版次 A	