




**SPECIFICATIONS**

- ① Housing Material: Polyamide 66(UL94V-0), Black
- ② Screw: M2.6 Nickel Plated Steel
- ③ Terminals: Tin Plated Brass

Screws Torque: 3 In-Lb  
 Wire Range: 14~24 AWG  
 Rated: 12 Amperes.AC300V  
 Operation Temperature: -55°C~+115°C  
 Insulation withstands volt: AC2000V min  
 Insulation resistance: >1000MΩ or more at DC500V

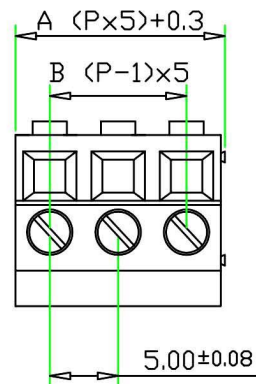

Tolerance ± 0.50

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	10.3	15.3	20.3	25.3	30.3	35.3	40.3	45.3	50.3	55.3	60.3	65.3	70.3	75.3
B	5	10	15	20	25	30	35	40	45	50	55	60	65	70
POLE	16	17	18	19	20	21	22	23	24					
A	80.3	85.3	90.3	95.3	100.3	105.3	110.3	115.3	120.3					
B	75	80	85	90	95	100	105	110	115					

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 參考	TOLERANCE 容許公差 0 ± .00 ± .000 ±	PART NAME 品名 5.0MM TERMINAL BLOCK WIRE CAGE TYPE SUITABLE FOR 14~24AWG XXP TIN PLATED BLACK COLOR "-" TYPE SCREW ROHS
DWG. 製圖 Betty	UNIT 單位 M M	SIZE 紙張尺寸 A 4	PART NO. 料號 C0930-XXWTTB00R
DATE 制表日 2018/02/27	PAGE 張數 1 OF 1	REV. 版次 B	