


- Material
 - ①Screws : M3.0 steel, Zinc plated, “-” slot type
 - ②Housing : PA66, UL94V-0
 - ③Reed : Phosphor bronze, Ni plated or stainless steel
 - ④Pin header : Brass, Tin plated
- Electrical

UL	IEC
Rated voltage : 300V	250V
Rated current : 12A	24A
Insulation resistance: 500MΩ/DC500V	
Withstanding Voltage : AC2000V/1min	
Wire range: 22-14AWG 2.5mm ²	
- Mechanical
 - Operating temperature: -30℃~+120℃
 - Soldering temperature: 250℃±5/5sec
 - Torque: 0.5N.m (4.43Lb.in)
 - Strip length: 4.5-5mm

N=Number of Poles
 Dim P=(N-1)x5.00
 Dim L=Nx5.00

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

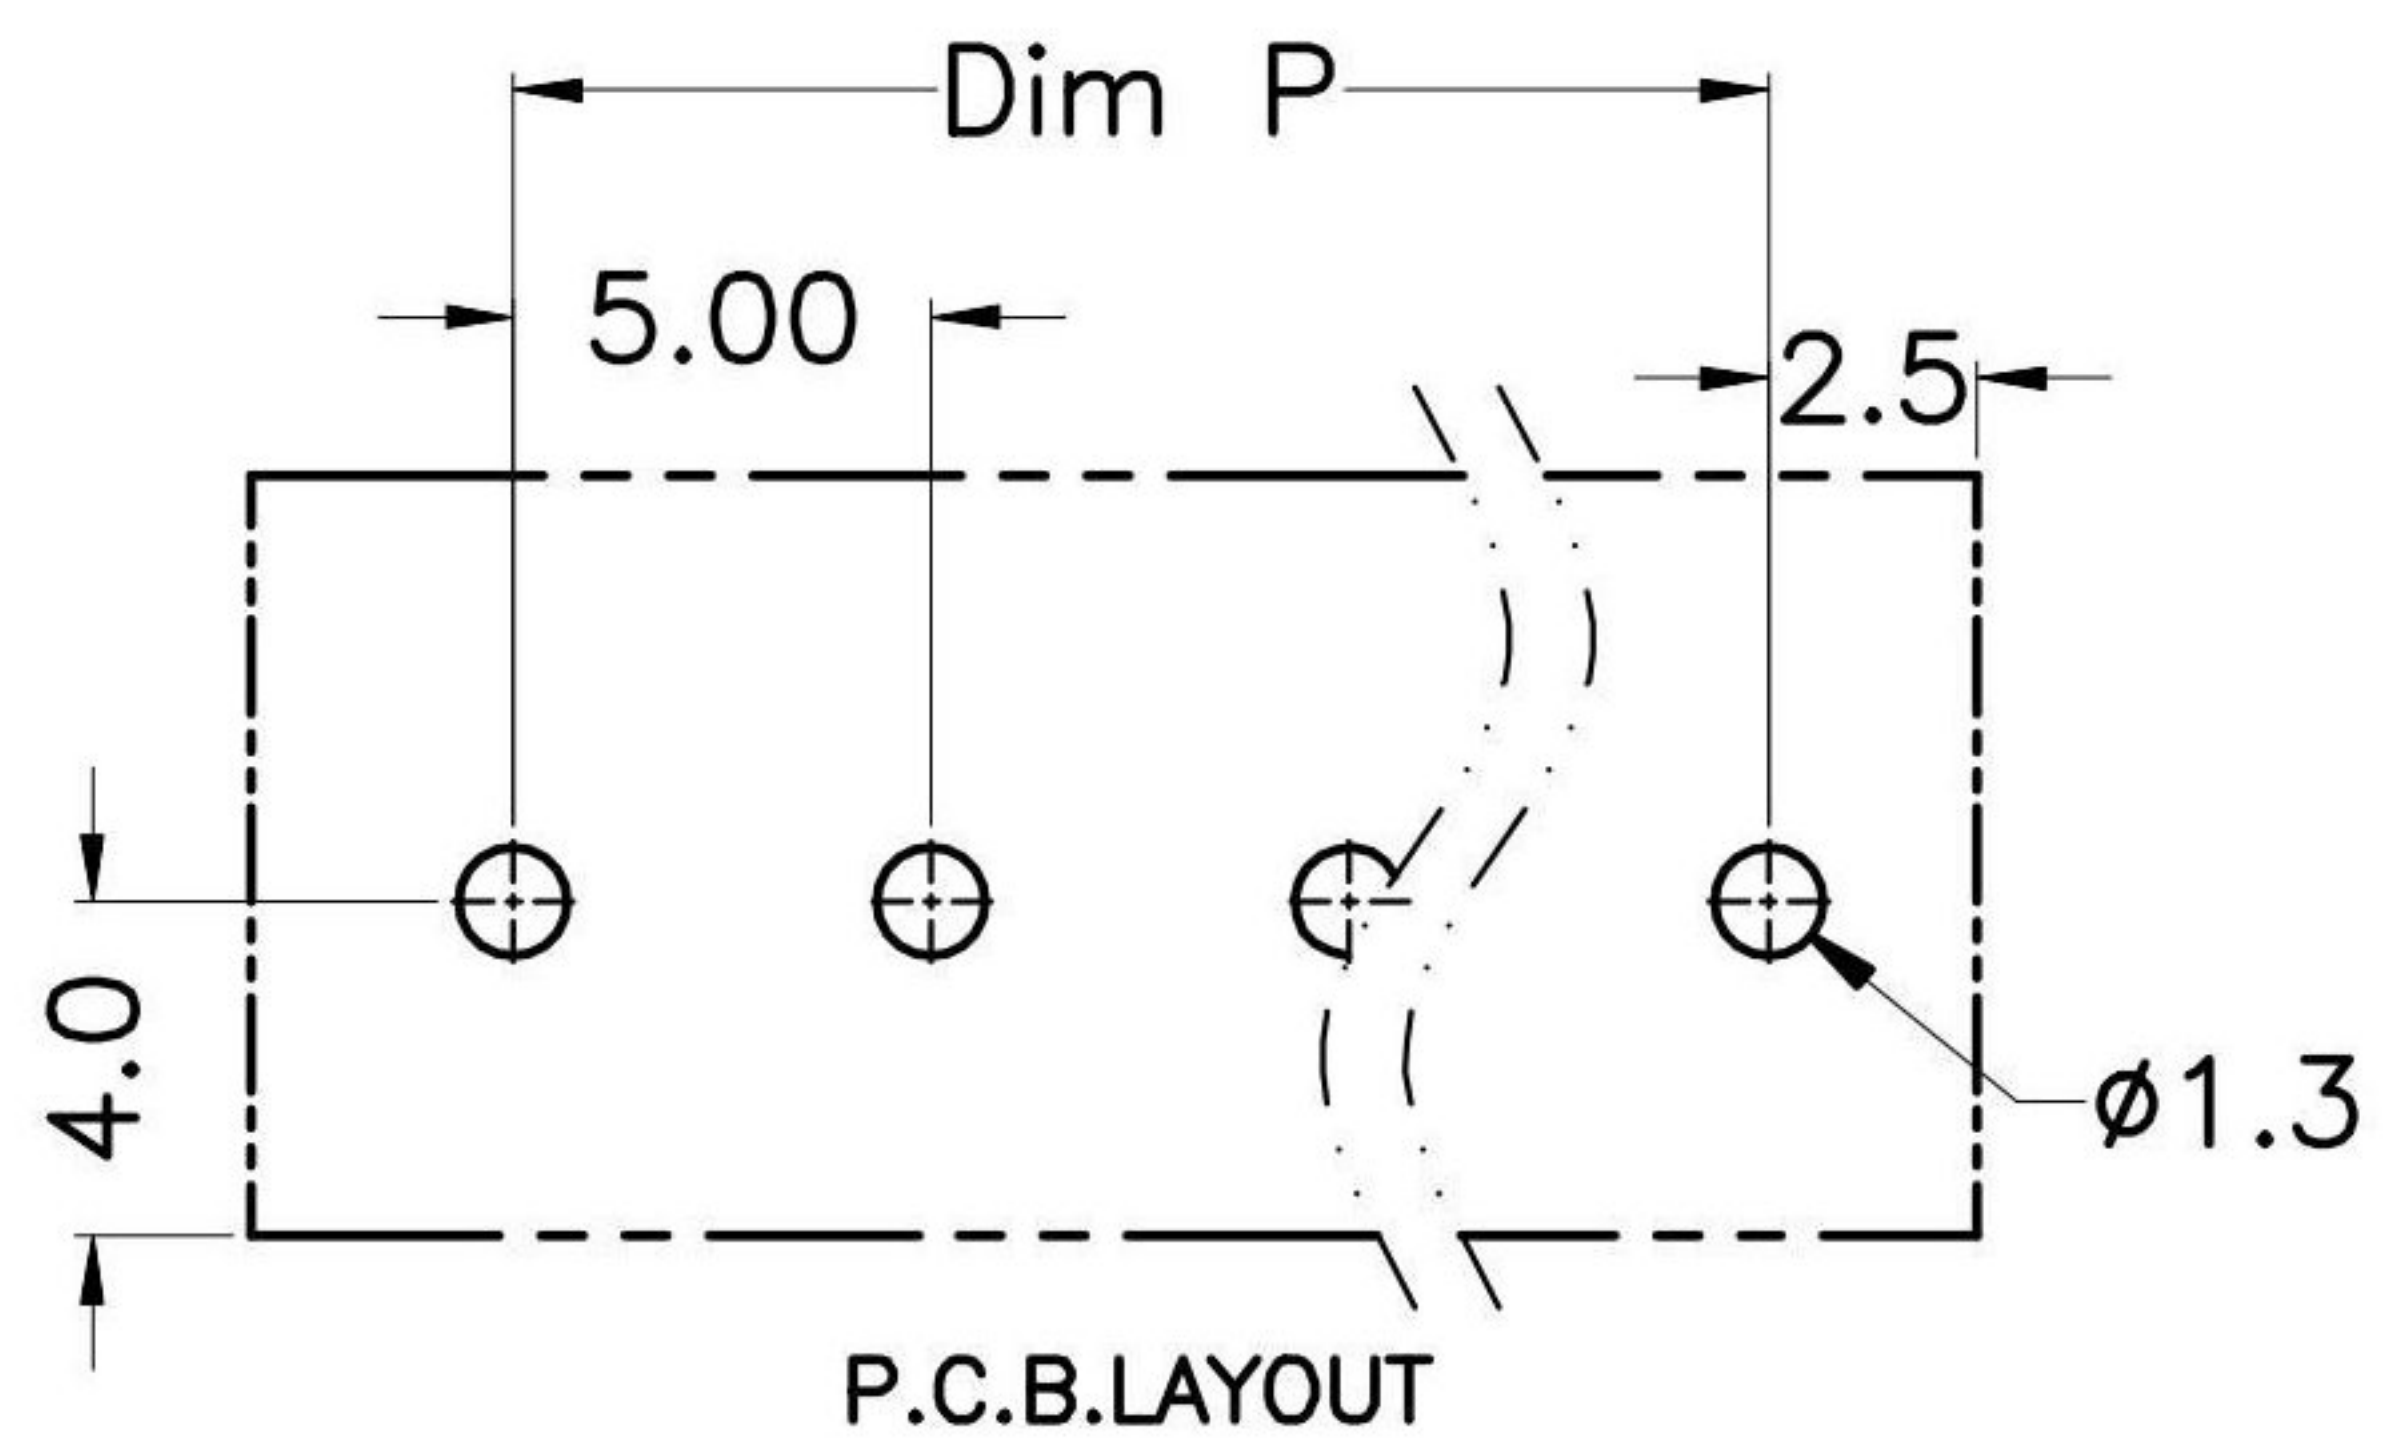

APPD. 核准 HELEN DWG. 製圖 ABBY DATE 制表日 2017/12/18	SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	TOLERANCE 容許公差 X, ±0.5 X', ±5' .X ±0.3 .X' ±3' .XX ±0.1 .XX' ±1'	PART NAME 品名 5.0mm TERMINAL BLOCK H=12.6mm XXPIN STRAIGHT TYPE SUITABLE FOR 14~22AWG BLUE INSULATOR ROHS
			PART NO. 料號 C0943-XXSWTL00R

RoHS Compliant **HSM** 玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.