


1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F  
G  
H




A  
B  
C  
D  
E  
F  
G  
H

$A = (\text{Pitch} \times \text{No. of contact}) \pm 0.30$

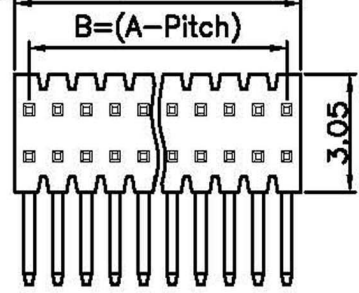

LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass C2600	Current Rating : 0.75A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

**Normal Force : 450 Grams Average .**  
**Temperature Rating : -40°C ~ +105°C .**  
**Dielectric Withstanding Voltage : 1000V AC/Min**

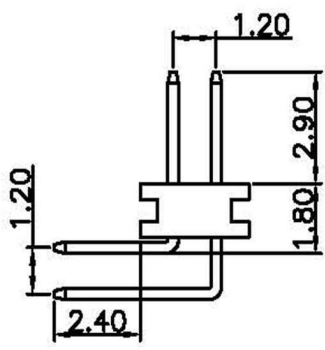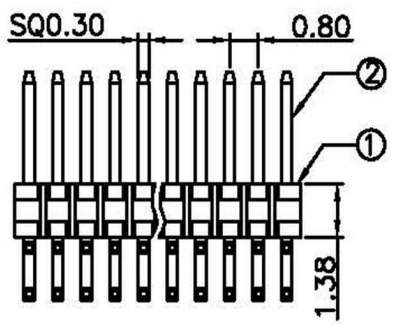

**P.C.B LAYOUT**

RoHS Compliant		<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 <b>BETTY</b>		TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 0.8X1.2mm PIN HEADER DUAL ROW RIGHT ANGEL TYPE 2XXXP H=1.38mm (C=2.9mm D=2.4mm E=1.8mm)
DWG. 製圖 <b>BETTY</b>	SCALE 比例 參考	UNIT 單位 M M	PART NO. 料號 <b>C1808-XXBRXAR0R</b>
DATE 制表日 2007/08/02	PAGE 張數 1 OF 1	REV. 版次 A	

1 2 3 4 5 6 7 8