

**MATERIAL**

Contact Pin : Brass

**SPECIFICATION**



Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V


Contact Resistance : 15mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

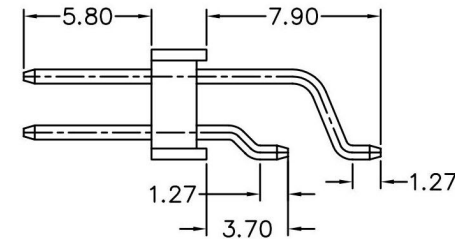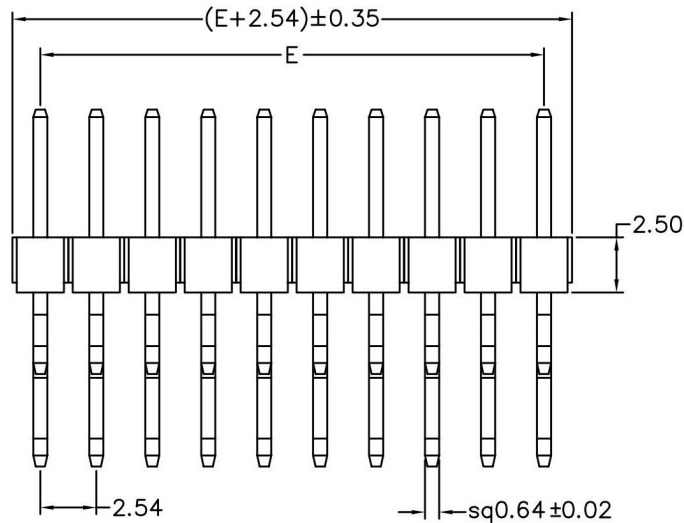

POLES	DIM E	POLES	DIM E
		21	50.80
2	2.54	22	53.34
3	5.08	23	55.88
4	7.62	24	58.42
5	10.16	25	60.96
6	12.70	26	63.50
7	15.24	27	66.04
8	17.78	28	68.58
9	20.32	29	71.12
10	22.86	30	73.66
11	25.40	31	76.20
12	27.94	32	78.74
13	30.48	33	81.28
14	33.02	34	83.82
15	35.56	35	86.36
16	38.10	36	88.90
17	40.64	37	91.44
18	43.18	38	93.98
19	45.72	39	96.52
20	48.26	40	99.06

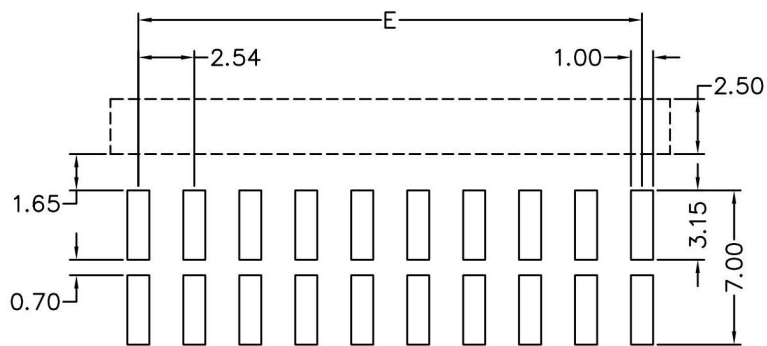

Recommended P.C.B Layout

RoHS  
Compliant

**HSM** 玄茂科技股份有限公司  
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.  
核准  
**BETTY**

DWG.  
製圖  
**BETTY**

DATE 制表日  
2011/03/03

SCALE  
比例 參考

UNIT  
單位 M M

PAGE  
張數 1 OF 1

TOLERANCE  
.0 =±.30  
.00 =±.15  
.000 =±.0XX  
.0000=±.  
ANG.=±3°

SIZE.  
紙張尺寸 A 4

REV.  
版次 A

PART NAME 品名  
2.54mm PIN HEADER DUAL ROW HORIZONTAL SMT TYPE  
H=2.5mm(W=5.0mm) 2XXXP (C=5.8 D=7.9 E:1.27 H:1.27mm)  
WITHOUT LOCATING PEG ROHS

PART NO.  
料號 C2201-XXBDGJDXR