
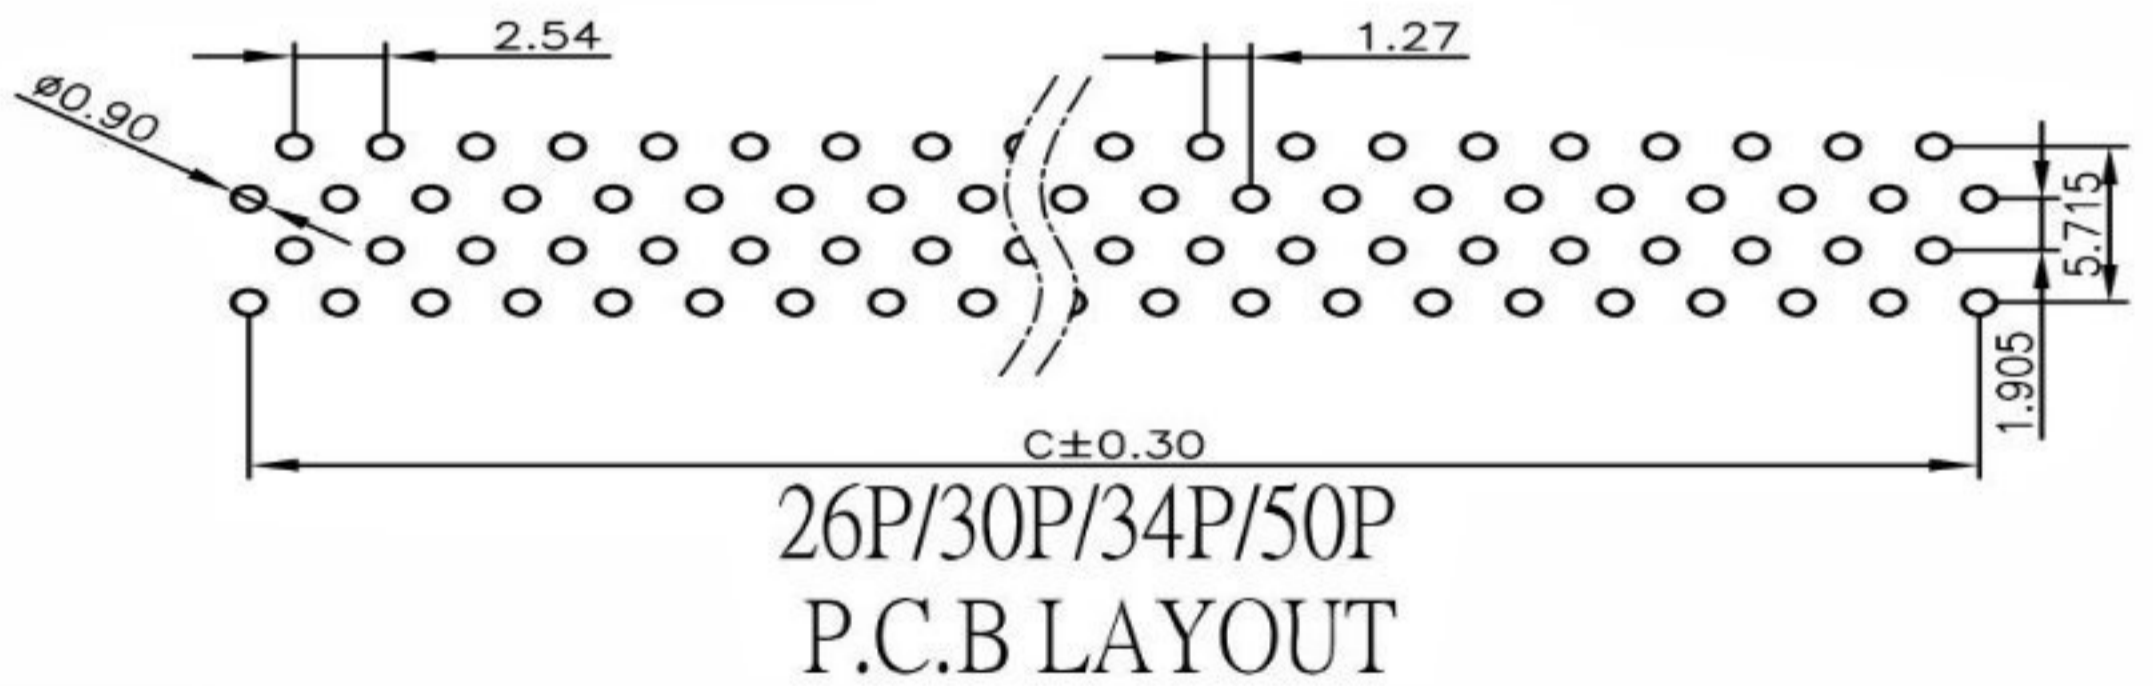


NOTES:
 1. MATERIAL
 1.1 HOUSING: NYLON66 UL94V-0.
 1.2 TERMINAL: COPPER ALLOY (t=0.3mm);
 TIN PLATED AND NICKEL.
 2. SPECIFICATION
 2.1 CURRENT RATING: 0.5A MAX.
 2.2 DIELECTRIC WITHSTANDING VOLTAGE:
 300V AC R.M.S FOR ONE MINUTE.
 2.3 INSULATION RESISTANCE: 1000MΩ MIN.
 AT 500V DC.
 2.4 OPERATING TEMPERATURE: -40°C~+85°C.

| | | | |
|------|-------|-------|-------|
| 20P | 18.80 | 20.80 | 11.43 |
| 26P | 22.61 | 24.61 | 15.24 |
| 30P | 25.15 | 27.15 | 17.78 |
| 34P | 27.69 | 29.69 | 20.32 |
| 40P | 31.42 | 33.50 | 24.13 |
| 50P | 37.77 | 39.85 | 30.48 |
| 60P | 44.20 | 46.20 | 36.83 |
| 68P | 49.20 | 51.40 | 41.91 |
| 80P | 56.82 | 59.00 | 49.53 |
| 100P | 69.60 | 71.60 | 62.23 |
| P數 | A | B | C |

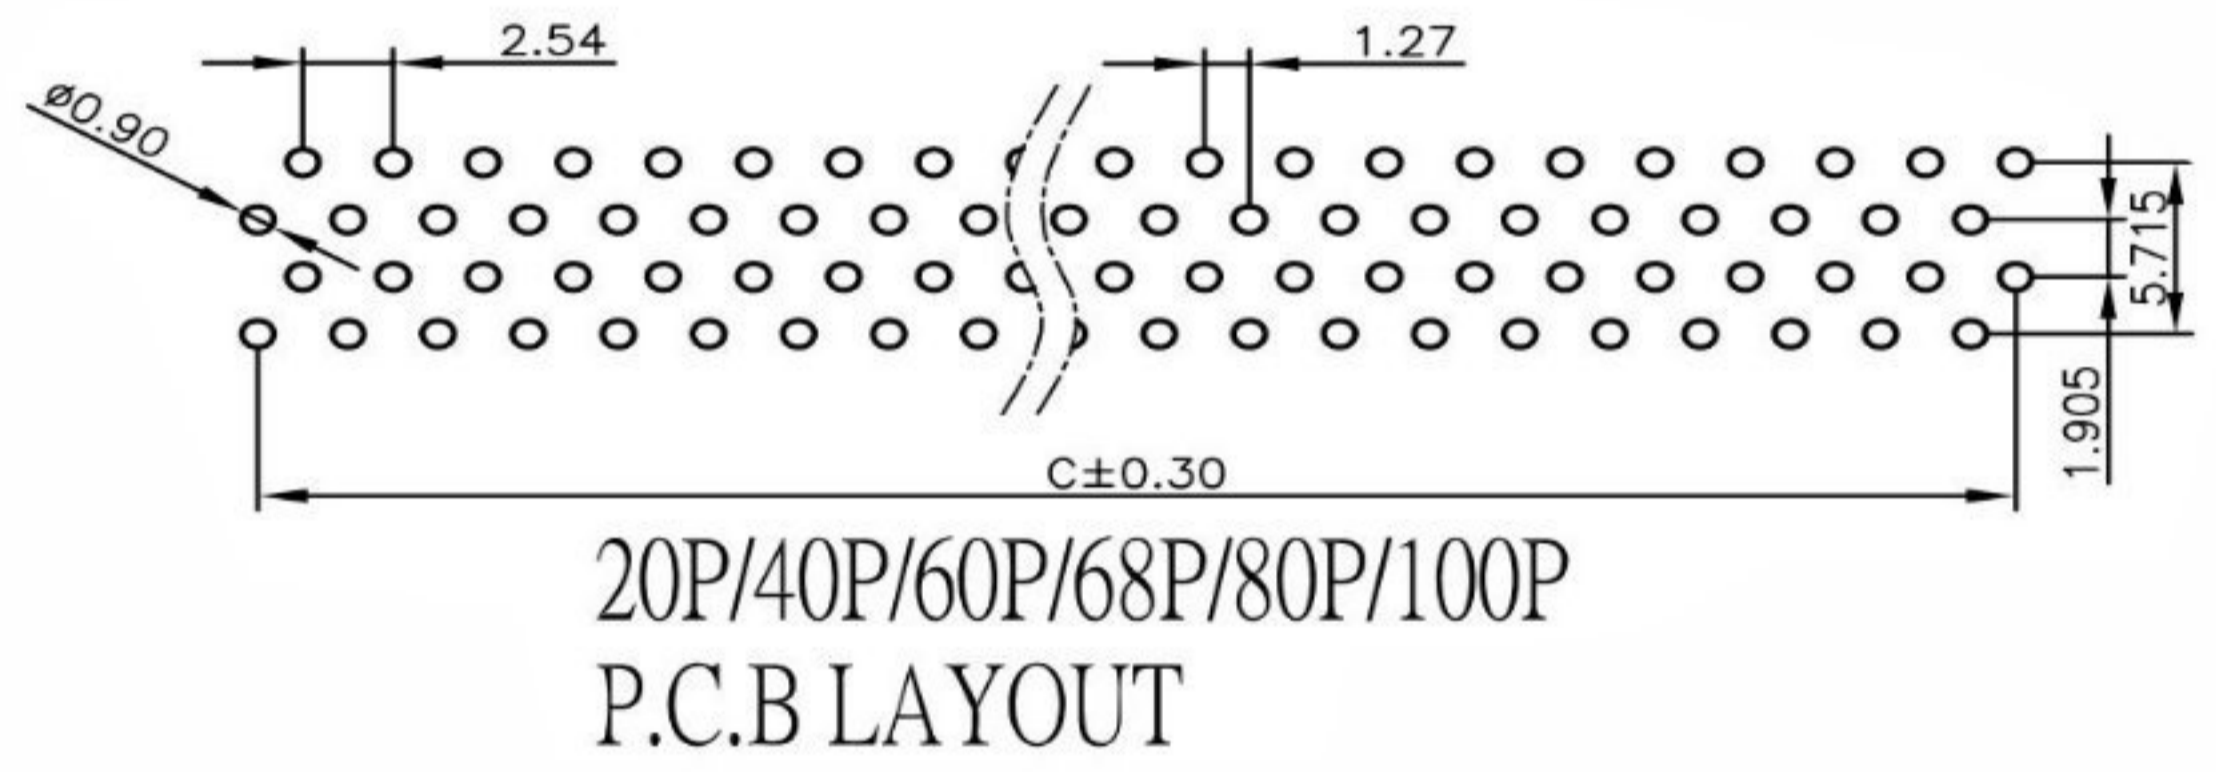

| | | | |
|--|---|--|--------------------------------|
| RoHS Compliant | | HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD. | |
| APPD. 核准 DWG. 製圖 HELEN DATE 制表日 2011/11/16 | TOLERANCE 容許公差 SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1 | PART NAME 品名 HIGH DENSITY DIP PLUG 1.27mm XXP TIN PLATING BLACK COLOR ROHS | PART NO. 料號 C3115-XXTB0000R |