



Notes:

- Material :
Housing : Thermoplastic UL 94V-0 ,Black
Terminal : Copper Alloy
- Finish :
Terminal : Selected Gold on Contact Area,
G/F on Solder Tails, Both over
50u" Min. Ni Under-plated Overall

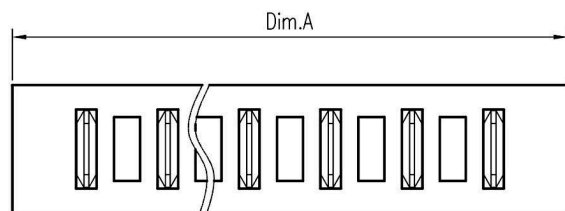

Amount of Pins	Dim.A	Dim.B
4	12.05	7.50
5	14.55	10.00
6	17.05	12.50
7	19.55	15.00
8	22.05	17.50
9	24.55	20.00
10	27.05	22.50

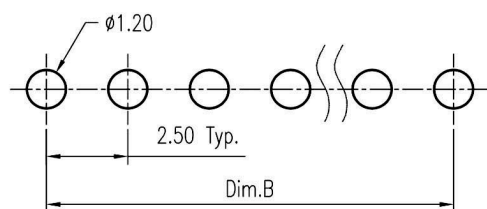

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.									
APPD. 核准	 SCALE 比例 参考 UNIT 單位 M M PAGE 張數 1 OF 1	<small>Tolerance unless otherwise specified</small> <table border="1"> <tr> <td>X ± --</td> <td>X' ± 10'</td> </tr> <tr> <td>XX ± 0.38</td> <td>XX' ± 5'</td> </tr> <tr> <td>XXX ± 0.25</td> <td>XXX' ± 2'</td> </tr> <tr> <td>XXXX ± 0.13</td> <td>XXXX' ±</td> </tr> </table>	X ± --	X' ± 10'	XX ± 0.38	XX' ± 5'	XXX ± 0.25	XXX' ± 2'	XXXX ± 0.13	XXXX' ±	PART NAME 品名 2.5mm Battery Connector Male xxPin Straight Type Contact Area:Gold xxU" Plating Dip Area:Gold Flash Plating Length=3.5mm+3.0mm+2.0mm Black Color Tube Packing ROHS
X ± --			X' ± 10'								
XX ± 0.38	XX' ± 5'										
XXX ± 0.25	XXX' ± 2'										
XXXX ± 0.13	XXXX' ±										
DWG. 製圖 Betty	PART NO. 料號 C3474-XXSXBTO0R										
DATE 制表日 2020/09/18		REV. 版次 A									