
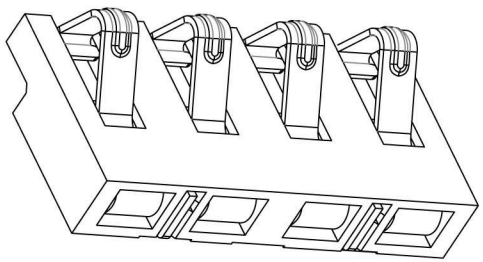





1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

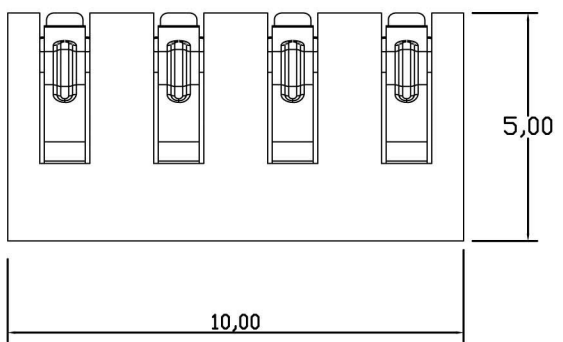


**SPECIFICATION:**  
 Rated Current:2.0A  
 Rated Voltage:12V  
 Withstanding Voltage:500V  
 Contact Resistance:30 mΩ  
 Insulation Resistance:500MΩ  
 Operating temperature:-40°C~+85°C  
 Material:LCP  
 Contact:Phosphor bronze,Gold Flash

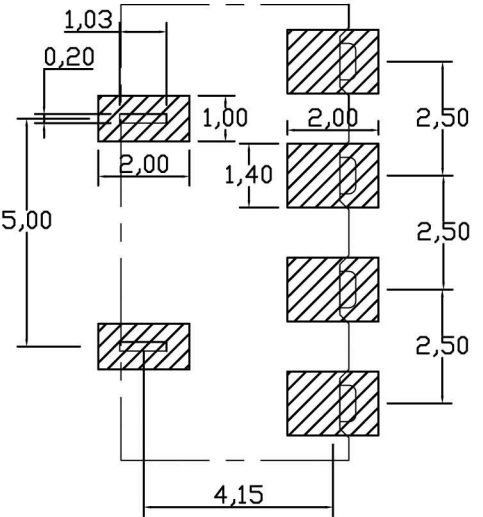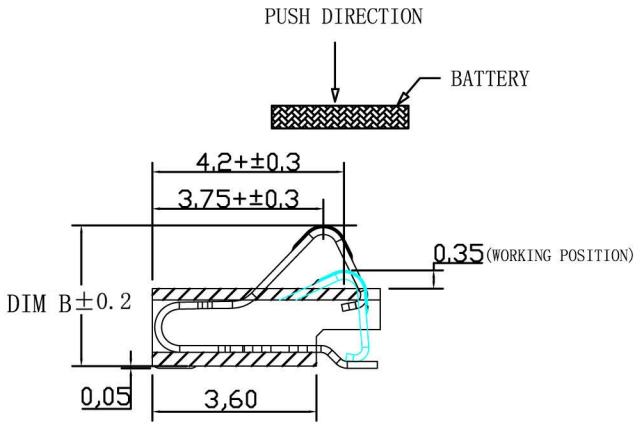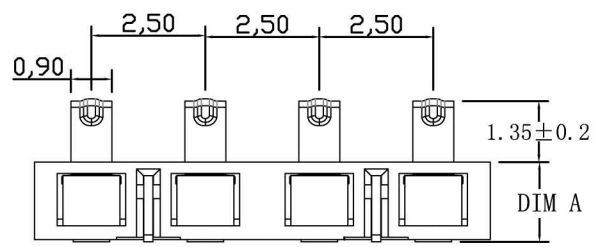

RECOMMENDED PCB LAYOUT  
 TOP VIEW (. XX ± 0.05)

PART NO.	DIM A	DIM B
C3476-04DAGNBRR	1.70	3.05 ± 0.2
C3476-04DBGNBRR	2.0	3.35 ± 0.2

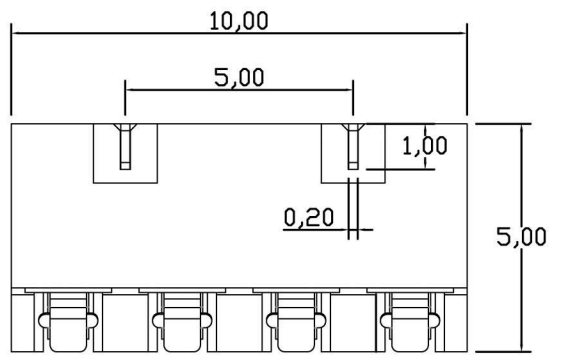

**RoHS Compliant** **HSM 玄茂科技股份有限公司**  
**HSUAN MAO TECHNOLOGY CO., LTD.**

APPD. 核准	SCALE 比例 參考	TOLERANCE X. ±0.35 XX ±0.25 XXX ±0.15 XXXX ±0.05	PART NAME 品名 2.5MM BATTERY CONNECTOR 4PIN SMT TYPE GOLD FLASH PLATING BLACK COLOR MATERIAL:LCP REEL PACKING ROHS
DWG. 製圖 Hedy		UNIT 單位 MM	
DATE 制表日 2022/12/29	PAGE 張數 1 / 1	REV. 版次 A	PART NO. 料號 C3476-04DXGNBRR

1 2 3 4 5 6 7 8