




MATERIAL

Insulator : 30% Glass fiber PBT
 Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C

POLES	DIM A	DIM B	DIM C
6	15.20	12.80	5.08
8	17.78	15.48	7.62
10	20.30	18.10	10.16
12	22.84	20.64	12.70
14	25.38	23.18	15.24
16	27.92	25.72	17.78
20	33.00	30.80	22.86
24	38.08	35.88	27.94
26	40.62	38.42	30.48
30	45.70	43.50	35.56
34	50.80	48.58	40.64
40	58.40	56.20	48.26
44	63.48	61.28	53.34
50	71.10	68.90	60.96
56	78.72	76.52	68.58
60	83.80	81.60	73.66
64	88.88	86.68	78.74

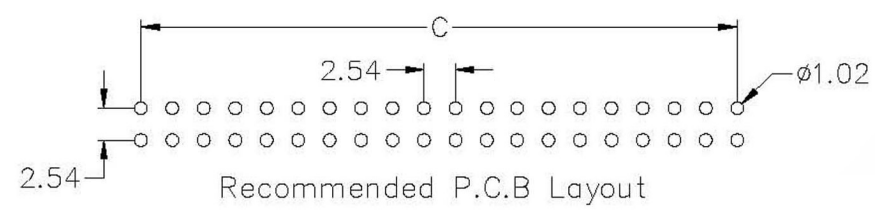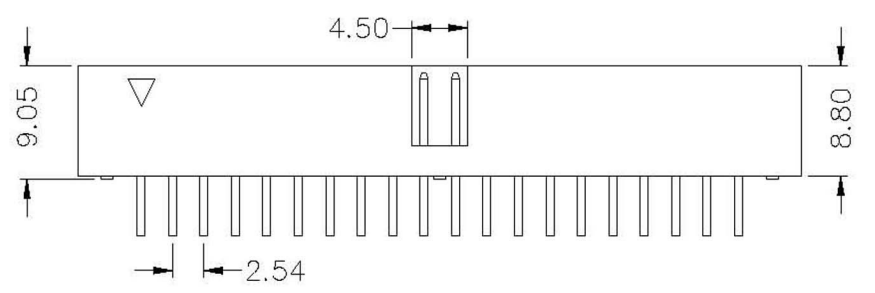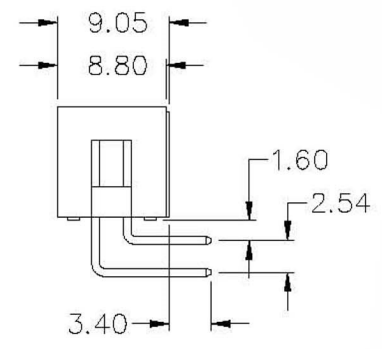

C 3510 — **XX R P G B 0 0 R**

- 1. PRODUCTS: C:Connector
- 2. SERIES NO.: 3510
- 3. CONTACT NO.: 10-64
- 4. CONTACT TYPE: R:Right Angle
- 5. INSULATOR MATERIAL: P:PBT
- 6. CONTACT PLATING: G:Gold Flash
- 7. INSULATOR COLOR: B:Black
- 8. PACKING STYLE: 0:No Option
- 9. FILL IT WITH "0"
- 10. R:ROHS

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY		TOLERANCE .0 =±.30 .00 =±.20 .000 =±.XXX .0000=±. ANG.=±3°	PART NAME 品名 BOX HEADER 2.54mm X 2.54mm XXP RIGHT ANGLE TYPE GOLD FLASH PLATING BLACK INSULATOR PBT MATERIAL ROHS
DWG. 製圖 BETTY	SCALE 比例 參考 UNIT 單位 M M PAGE 張數 1 OF 1	SIZE 紙張尺寸 A 4 REV. 版次 A	PART NO. 料號 C3510-XXRPGB00R
DATE 制表日 2009/02/26			