





Specifications

1. (MATERIAL)

Housing: LCP+30%G. F UL94V-0, Color: Black
 Contact: Brass, 0.8u" MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. (characteristics):

Current Rating: 1 AMP.
 Contact Resistance: 20 mΩ MAX.
 Insulating Resistance: 1000 MΩ MIN.
 Withstanding Voltage: AC 500V.
 Temperature Range: -40° C to +105° C

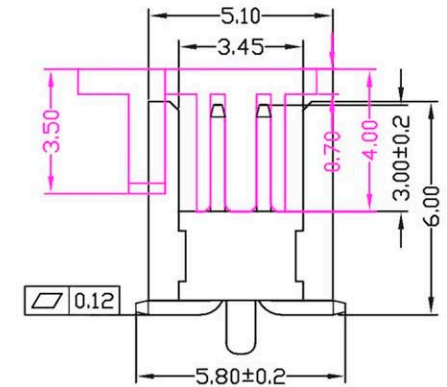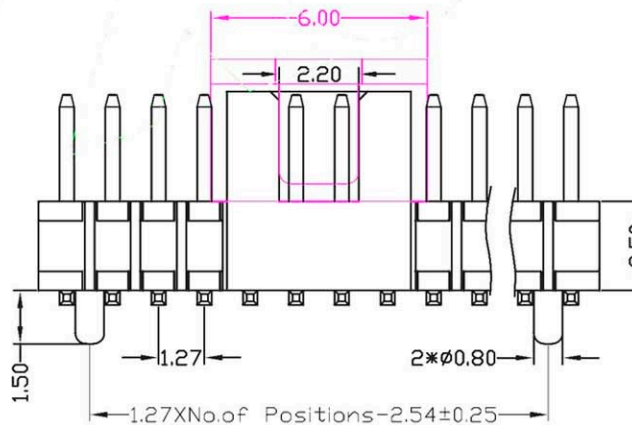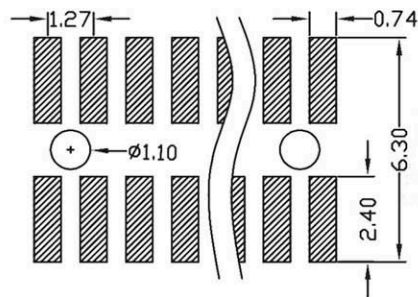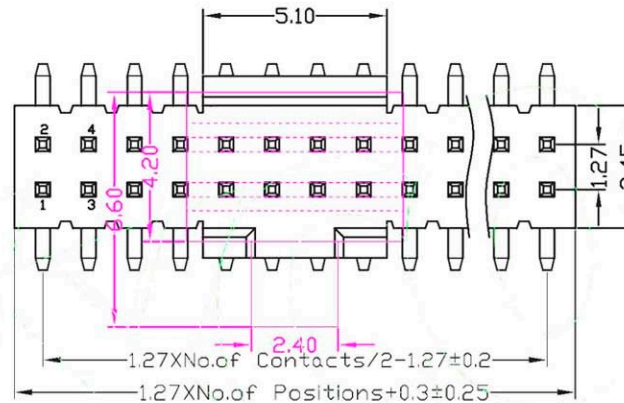

C	3513	10	D	G	N	B	T	Y	R
1	2	3	4	5	6	7	8	9	10

- | | | | |
|---|--------------------------------------|---|---|
| 1. PRODUCTS:
C: Connector | 4. CONTACT TYPE:
D: S.M.T | 6. INSULATOR MATERIAL:
N: LCP | 9. BODY OPTION:
Y: W/ Locating Peg
(SMT Only) |
| 2. SERIES NO.:
3513 | 7. INSULATOR COLOR:
B: Black | 8. PACKING STYLE:
T: Tube Packing
Q: PAD+Reel Packing | 10. R: ROHS |
| 3. CONTACT NO.:
10(2x5), 16(2x8),
20(2x10), 26(2x13),
30(2x15), 40(2x20),
50(2x25), 14(2x7) | 5. CONTACT PLATING:
G: Gold Flash | | |

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差 0 ± 0.35 .00 ± 0.25 ANG. ± 5°	PART NAME 品名 1.27 X 1.27mm SHROUDED STACKER 2X??PIN SMT TYPE GOLD FLASH PLATING MATERIAL: LCP UL94V-0 WITH LOCATING PEG BLACK COLOR PAD+REEL PACKING ROHS
DWG. 製圖 HELEN	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 C3513-XXDGNBQYR
DATE 制表日 2022/10/28	PAGE 張數 1 OF 1	REV. 版本 A	