

Specifications





(Remark)

1. (MATERIAL)

Housing: LCP+30%G. F UL94V-0, Color: Black
 Contact: Brass, 0.8u" MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. (characteristics):

Current Rating: 1 AMP.
 Contact Resistance: 20 mΩ MAX.
 Insulating Resistance: 1000 MΩ MIN.
 Withstanding Voltage: AC 500V.
 Temperature Range: -40° C to +105° C

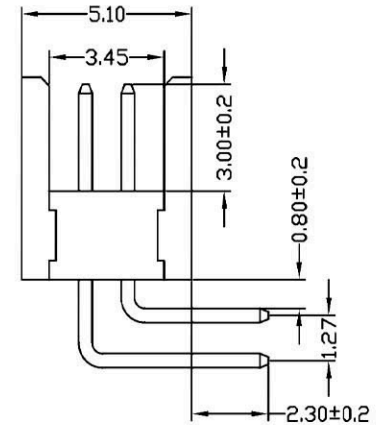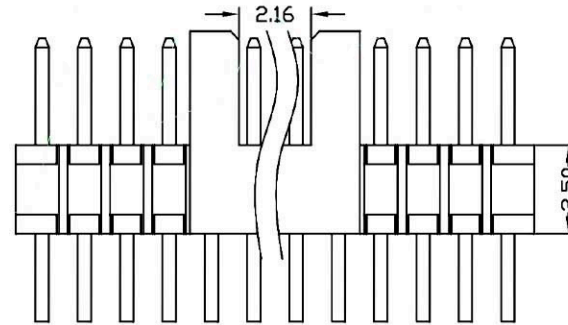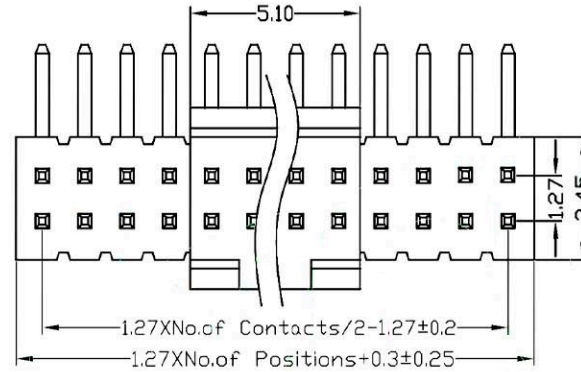

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖 Helen		0 ± 0.35 .00 ± 0.25 ANG. ± 5°	1.27 X 1.27mm Shrouded Stacker 2X??Pin Right Angle Gold Flash Plating Material: LCP UL94V-0 Black Color ROHS
DATE 制表日 2020/9/11	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. C3513-XXRGNBXNR
	PAGE 張數 1 OF 1	REV. 版本 A	料號