
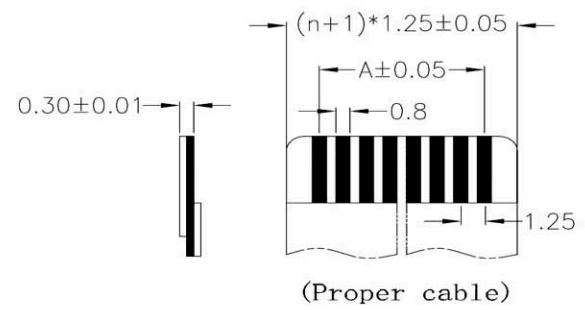




尺寸 mm P数	DIM.A	DIM.B	DIM.C
4	3.75	6.40	8.50
5	5.00	7.65	9.75
6	6.25	8.90	11.00
7	7.50	10.15	12.25
8	8.75	11.40	13.50
9	10.00	12.65	14.75
10	11.25	13.90	16.00
11	12.50	15.15	17.25
12	13.75	16.40	18.50
13	15.00	17.65	19.75
14	16.25	18.90	21.00
15	17.50	20.15	22.25
16	18.75	21.40	23.50
17	20.00	22.65	24.75
18	21.25	23.90	26.00
19	22.50	25.15	27.25
20	23.75	26.40	28.50
21	25.00	27.65	29.75
22	26.25	28.90	31.00
23	27.50	30.15	32.25
24	28.75	31.40	33.50
25	30.00	32.65	34.75
26	31.25	33.90	36.00
27	32.50	35.15	37.25
28	33.75	36.40	38.50
29	35.00	37.65	39.75
30	36.25	38.90	41.00
31	37.50	40.15	42.25
32	38.75	41.40	43.50
33	40.00	42.65	44.75
34	41.25	43.90	46.00
35	42.50	45.15	47.25
36	43.75	46.40	48.50
37	45.00	47.65	49.75
38	46.25	48.90	51.00
39	47.50	50.15	52.25
40	48.75	51.40	53.50

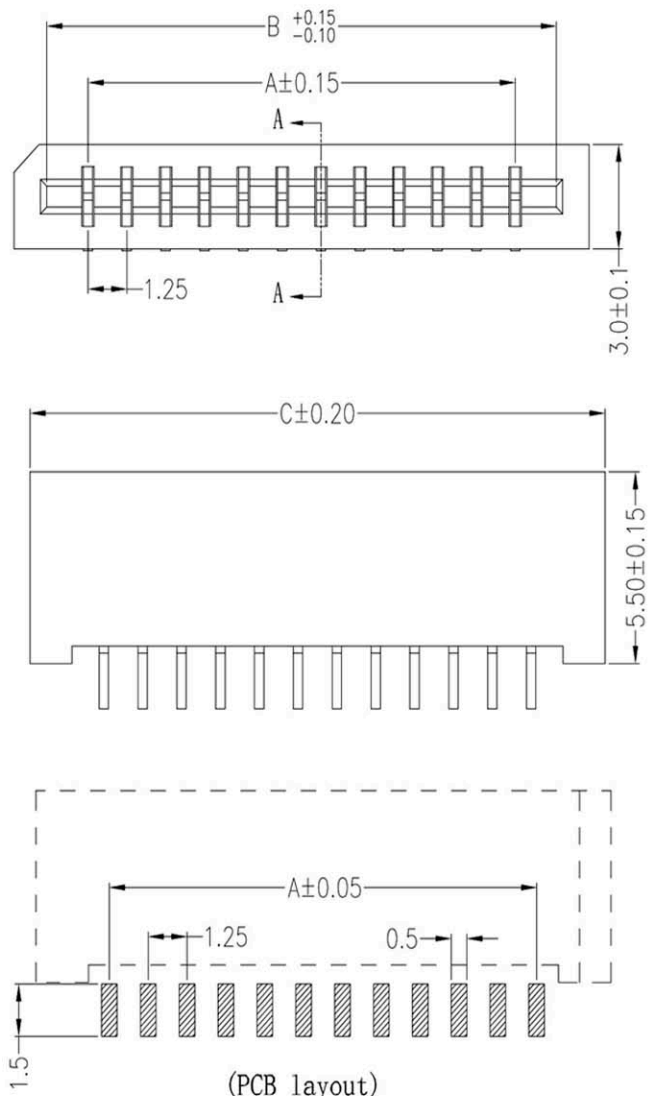

- (SPECIFICATIONS)
- ◆ Poles: 4~40
  - ◆ Voltage rating: AC, DC, 50V (200HZ)
  - ◆ Current rating: 0.5A, AC, DC
  - ◆ Withstand voltage: 500V AC/minute
  - ◆ Working Temperature: -25°C~+85°C
  - ◆ Insulation resistance:  $\geq 800 \text{ M}\Omega$
  - ◆ Contact resistance:  $\leq 0.02 \Omega$
  - ◆ Dual Contact
- (TERMINAL)
- ◆ Material: Phosphor Bronze
- (HOUSING)
- ◆ Material: PA9T, UL 94V-0

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差 0 $\pm 0.35$ .00 $\pm 0.25$ ANG. $\pm 3^\circ$	PART NAME 品名 NON ZIF/FPC 1.25mm SMT SIDE ENTRY XXP TIN PLATING BLACK COLOR ROHS
DWG. 製圖 <i>Helen</i>	SCALE 比例 參 考	UNIT 單位 M M	PART NO. 料 號 C3942-XXITXB00R
DATE 制表日 2017/4/12	PAGE 張數 1 OF 1	SIZE 線規尺寸 A 4	REV. 版本 A