


P.C. Board Layout
Tolerances: ±0.05

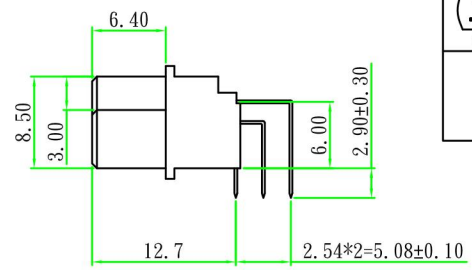

	a b c	96	2.54mm
	a - c	64	
	a - -	32	5.08mm
	a b c	48	
	a - c	32	
	a - -	16	
Contact Arrange	Rown With Contacts	Position	Pitch

+ 代表不插PIN
- 代表有插PIN

Material:

Housing: 30% Glass Filled PBT UL94V-0,
Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 2AMP,
Dielectric Withstanding Voltage: AC 1000V For 1 minute,
Insulator Resistance: 1000MΩ max. at DC 500V,
Contact Resistance: 30MΩ max. at DC 100mA,
Operating Temperature: -55°C~+105°C.

*ROHS Compliant.

RoHS Compliant	HSM 玄茂科技股份有限公司		HSUAN MAO TECHNOLOGY CO., LTD.	
	APPD.		TOLERANCE	PART NAME 品名
DWG. Karen	SCALE 参考	X ±0.5 .X ±0.25 .XX ±0.15	DIN41612 2.54mm DIP TYPE 90° 96P FEMALE ROHS	
DATE 2012/05/28	UNIT M M	SIZE A 4	PART NO.	C4163-XXFXARX0R
	PAGE 1 OF 1	REV. B	料號	