

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 15 AMP.




Dielectric Withstanding Voltage: AC 3100V for 1minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 8mΩ max. at DC 100m A.

Operating Temperature: -55°C ~ +125°C .

*** RoHS Compliant**

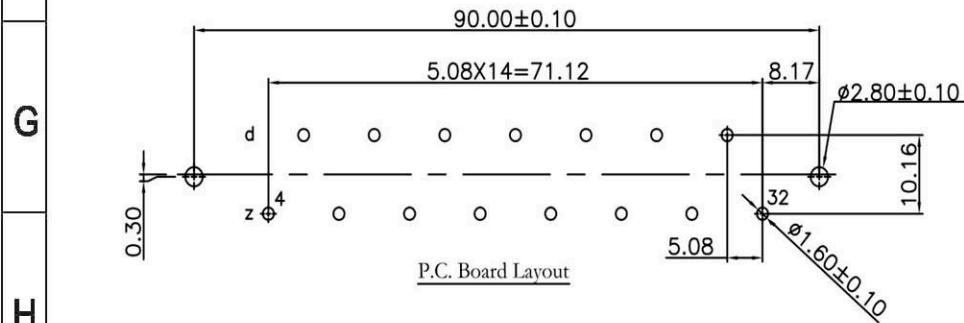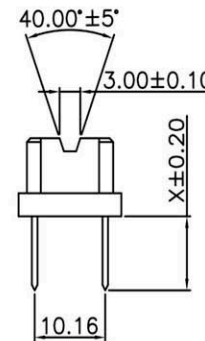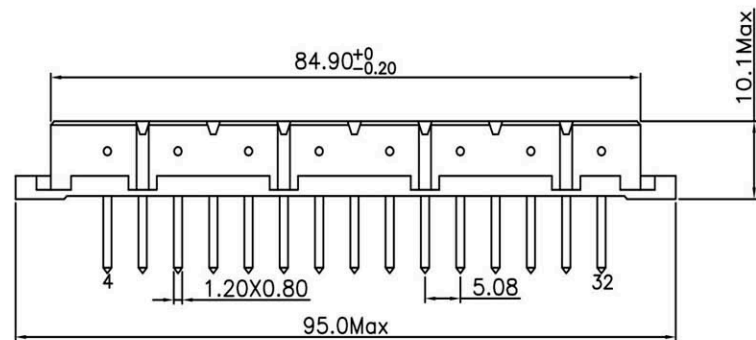

X Plating	A
	Ag/Ni
X length	1
	4.00

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
	APPD. 核准 DWG. 製圖 DATE 制表日 2008/8/12	SCALE 比例 UNIT 單位 M M PAGE 張數 1 OF 1
PART NAME 品名 DIN41612 H15 TYPE 15P FEMALE STRAIGHT TYPE DUAL ROW(Z+D) PIN LENGTH=4mm (TIN OR SILVER)) PLATING ROHS		
PART NO. 料號 C4164-15FABSX0R		