

## SPECIFICATIONS

### 1.468 HOUSING

Material : ABS, UL 94V-2. NO Poison (E88637 D180)  
Color : Ivory

### 2.ELECTRONIC WIRE SET

2-1.UL 1061 ELECTRONIC WIRE  
Conductor : Bare copper wire  $\varnothing 0.48\text{mm}$  (AWG 26)  
Insulation : SR-PVC,  $\varnothing 0.97\pm 0.10\text{mm}$   
Insulation Color : See drawing

### 2-2.O TYPE TERMINAL

Material : Bronze

### 2-3.WIRE TERMINAL

Material : Bronze

### 2-4.GOLD WIRE

Contact : Phosphor Bronze ,Fu" Gold  
over Nickel under plated

### 1.9 X 6 SCREW

Material : Iron  
Plating:Nickel

4.GREEN




5.YELLOW

6.WHITE

3.RED

2.BLACK

1.BLUE

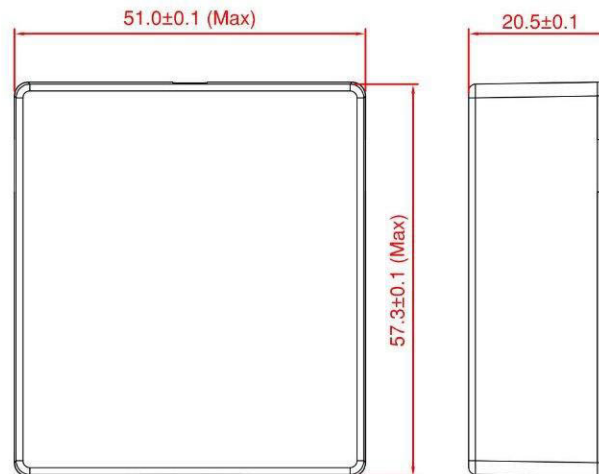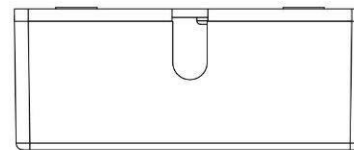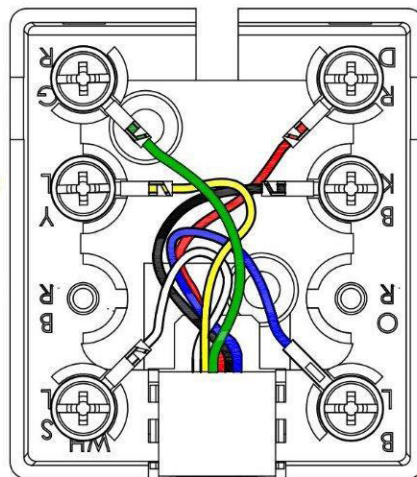

### Specification:

Current Rating : 1.5-2A



Voltage Rating : 12V

Operating Temp :  $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$

Insulation Resistance : 5M $\Omega$

Dielectric Withstanding Voltage : 300V

Contact Resistance : 3 $\Omega$

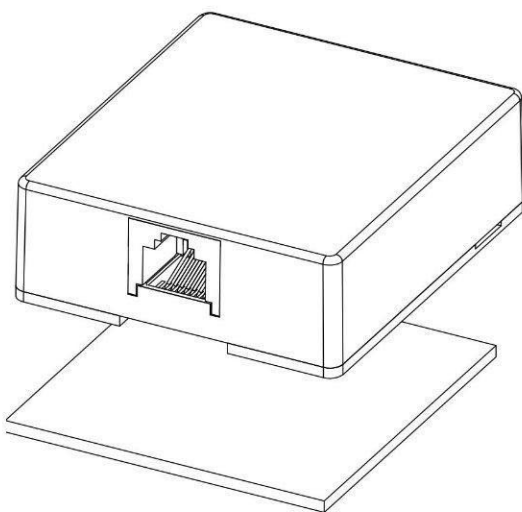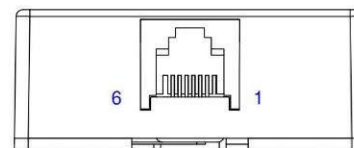

Telephone Jack - Surface Mount



Screw X 1 PCS

除特別註明外 UNLESS OTHERWISE SPECIFIED	
單位 UNIT: mm	比例 SCALE FREE
長度 LENGTH	公差 TOLERANCES
0.5-6	$\pm 0.05$
6-120	$\pm 0.10$
120-315	$\pm 0.20$
315-1000	$\pm 0.30$
角度 ANGLES	0°-30°
孔徑 HOLE DIAMETER	
0.5-30	$\pm 0.10$
30-100	$\pm 0.20$

**RoHS  
Compliant**

**HSM 玄茂科技股份有限公司**  
**HSUAN MAO TECHNOLOGY CO., LTD.**

APPD. 核准 BETTY  
DWG. 製圖 KAREN  
DATE 制表日 2014/03/19

TOLERANCE 容許公差  
0.00 ±  
ANG. ±  
SCALE 比例 參考  
UNIT 單位 MM  
PAGE 張數 1 OF 1  
REV. 版本 A

PART NAME 品名  
SURFACE WITH CONNECT BLOCK  
ASSEMBLY WITH 6P6C WITHOUT KEY  
GOLD 1U" PLATING IVORY COLOR ROHS  
PART NO. 料號 C4919-66SGI002R