

SPECIFICATIONS

1.468 HOUSING

Material : ABS, UL 94V-2. NO Poison (E88637 D180)
Color : Ivory

2.ELECTRONIC WIRE SET

2-1.UL 1061 ELECTRONIC WIRE

Conductor : Bare copper wire Ø0.48mm (AWG 26)
Insulation : SR-PVC, Ø 0.97±0.10mm
Insulation Color : See drawing

2-2.O TYPE TERMINAL

Material : Bronze

2-3.WIRE TERMINAL

Material : Bronze

2-4.GOLD WIRE





Contact : Phosphor Bronze „Fu" Gold over Nickel under plated

1.9 X 6 SCREW


Material : Iron
Plating:Nickel

Specification:

Current Rating : 1.5-2A
Voltage Rating : 12V
Operating Temp : -40°C~+80°C
Insulation Resistance : 5MΩ
Dielectric Withstanding Voltage : 300V
Contact Resistance : 3Ω

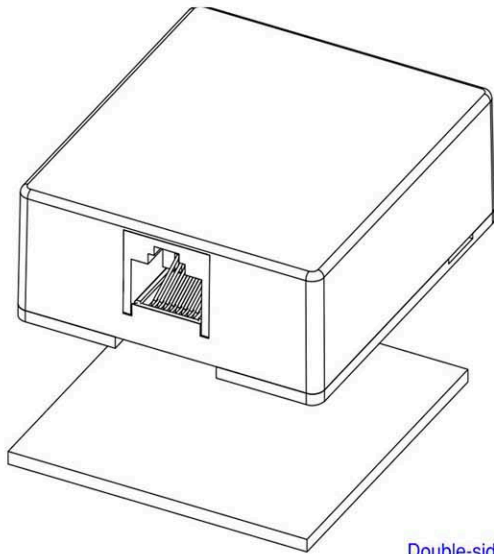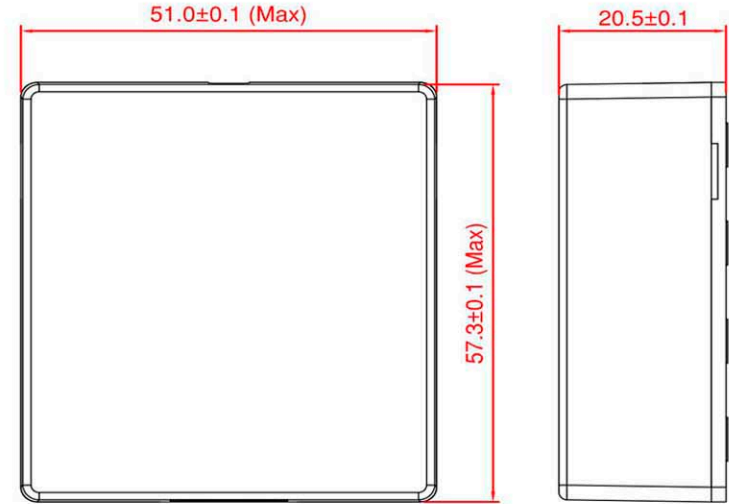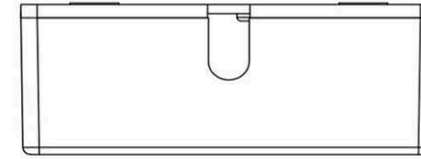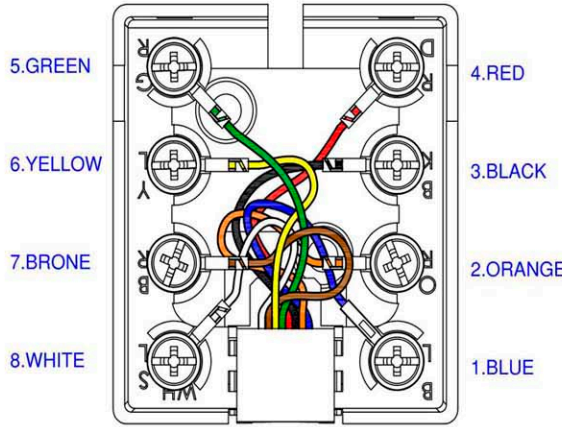


Telephone Jack - Surface Mount



19 X 6 Screw X 1 PCS

Double-sided adhesive foam cotton
50 X 50 mm t=2.0mm

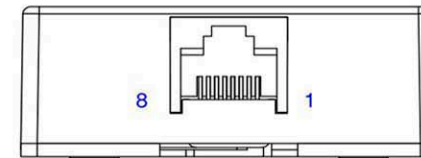

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE 容許公差 0 ± 0.35 .00 ± 0.25 ANG. ± 3°	PART NAME 品名 SURFACE WITH CONNECT BLOCK ASSEMBLY WITH 8P8C WITHOUT KEY GOLD FLASH PLATING IVORY COLOR ROHS
DWG. 製圖 <i>Helen</i>	UNIT 單位 M M	SIZE 紙張尺寸 A 4	PART NO. 料號 C4919-88SGI002R
DATE 制表日 2016/5/31	PAGE 張數 1 OF 1	REV. 版本 A	