


NOTE

- A. Material:**
1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
 2. Contact : Copper Alloy.
 3. Plating : Gold Plating.
- B. Temperature:** -20 to +105°
- C. Electrical:**
1. Voltage : 50V.
 2. Current : 0.5A.
 3. Contact Resistance : 40m Ω max.
 4. Dielectric Withstanding Voltage : 500V AC / 1 min.
 5. Insulation Resistance : 100M Ω min.

Available Pins : 20~100 Contacts

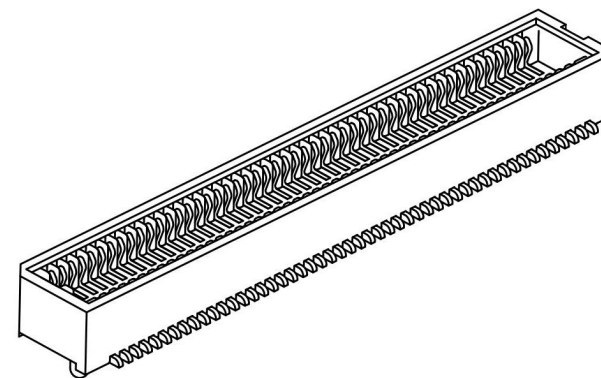

PCB Layout For
Surface Mounting

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	 SCALE 比例 参考	TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 0.5mm BOARD TO BOARD SMT CONN. 2XXXPIN FEMALE H=2.74mm(AFTER ASSEMBLY:3.7mm/4.0mm) GOLD FLASH PLATING BLACK COLOR (MALE&FEMALE ONE SET) ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 C6005-XXFCGBX0R
DATE 制表日 2018/04/18	PAGE 張數 1 OF 1	REV. 版次 C	