


Current Rating and voltage: 2 Amps 250V(r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature
 Plastic,(Nylon-6T) UL 94V-0
 Finish: Standard: Gold Flash all over

Recommended P.C. Board
 Hole Layout

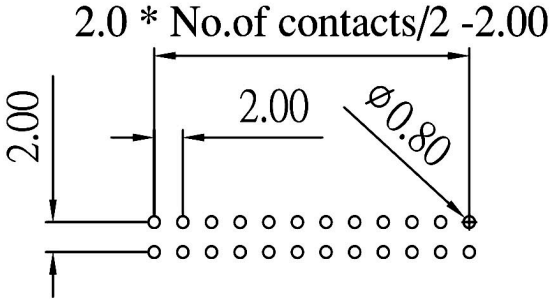

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 2.0MM X 2.0MM FEMALE HEADER DUAL ROW RIGHT ANGLE TYPE 2XXXPIN GOLD FLASH PLATING H=7.2MM W=4.8MM WAVE TYPE MATERIAL:NYLON 6T TUBE PACKING ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE 紙張尺寸 A 4	PART NO. 料號 C6838-XXBRGALTR
DATE 制表日 2021/07/09	PAGE 張數 1 OF 1	REV. 版次 B	