



1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F  
G  
H

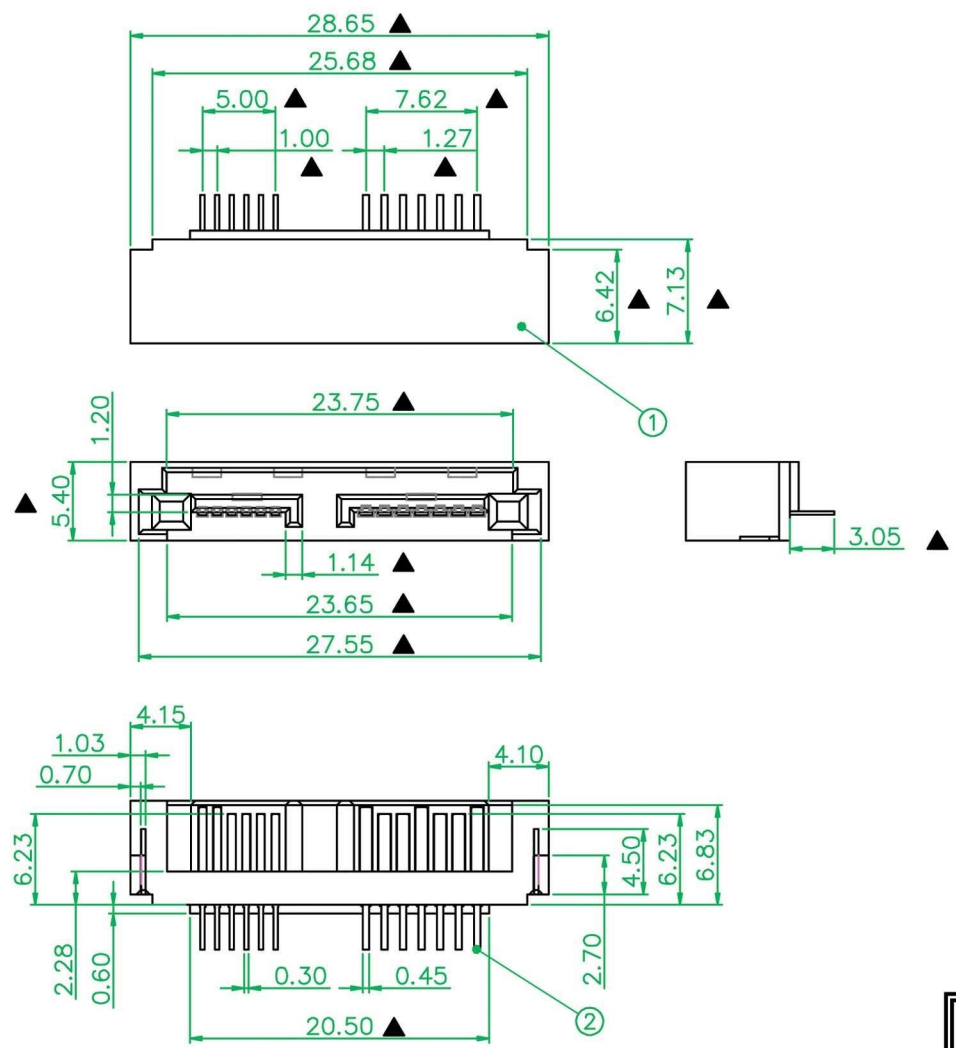

**SPECIFICATION:**  
**1.MATERIAL:**  
 HOUSING:LCP UL94V-0, COLOR:BLACK  
 CONTACT:BRASS C2680R-H T=0.25mm  
**2.FINISH:**  
 CONTACT: 1u" GOLD/TIN PLATING ON CONTACT AREA  
 100u" MIN. TIN PLATING ON SOLDERTAILS  
 50u" MIN. NICKEL UNDERPLATING OVERALL  
 PEG:100u" MIN. TIN PLATING ON SOLDERTAILS  
 50u" MIN. NICKEL UNDERPLATING OVERALL

**ELECTRICAL**  
 Rated Current:1.5A 40V  
 Contact Resistance:≤30 mΩ  
 Insulation Resistance:≥1000MΩ (100V±15V d. c.)  
 Withstanding Voltage:500 Vr. m. s, 1mA, 60s  
 Operating Temp:-40℃ to+ 85℃

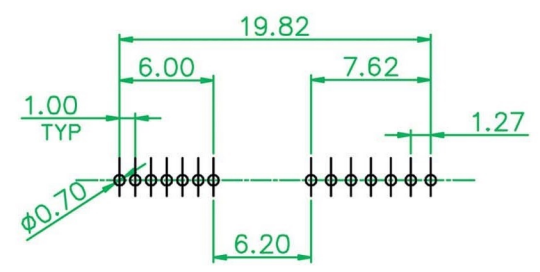

2	Terminal	Brass C2680		Gold/Tin Plated
1	Housing	High Temp	Black	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

<b>RoHS Compliant</b>		<b>HSM 玄茂科技股份有限公司</b>	
		<b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准		TOLERANCE .X ± .XX ±0.20 .XXX ±	PART NAME 品名 SATA CONNECTOR 13P(7+6P) MALE STRAIGHT TYPE PLASTIC BODY WITHOUT LOCATING PEG SELECTIVE GOLD PLATING BLACK COLOR MATERIAL:LCP ROHS
DWG. 製圖 <b>Hedy</b>	SCALE 比例 參考	SIZE. 紙張尺寸 A 4	PART NO. <b>C7003-13MSNSB0R</b>
DATE 制表日 2017/03/28	PAGE 張數 1 / 1	REV. 版次 A	料號

1 2 3 4 5 6 7 8